INTERNATIONAL RECTIFIER IOR

查询"2N7237"供应商

REPETITIVE AVALANCHE RATED AND dv/dt RATED

HEXFET® TRANSISTOR



P-CHANNEL

IRFM9240
2N7237
JANS2N7237
JANTX2N7237
JANTXV2N7237

[REF: MIL-S-19500/595]

–200 Volt, 0.51 Ohm HEXFET

The HEXFET® technology is the key to International Rectifier's advanced line of power MOSFET transistors. The efficient geometry design achieves very low on-state resistance combined with high transconductance.

The HEXFET transistors also feature all of the well established advantages of MOSFETs such as voltage control, very fast switching, ease of paralleling and temperature stability of the electrical parameters.

They are well suited for applications such as switching power supplies and virtually any application where military and/or high reliability is required.

Product Summary

Part Number	BV_{DSS}	$R_{DS(on)}$	I_D
IRFM9240	–200V	0.51Ω	–11A

FEATURES:

- Repetitive Avalanche Rating
- Isolated and Hermetically Sealed
- Alternative to TO-3 Package
- Simple Drive Requirements
- Ease of Paralleling
- Ceramic Eyelets

I

CASE STYLE AND DIMENSIONS

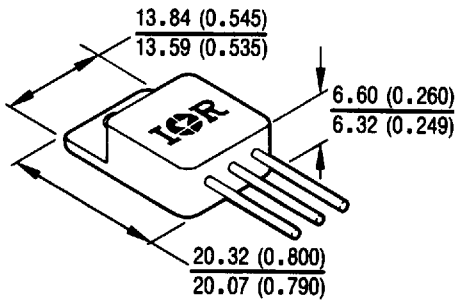

CAUTION

BERYLLIA WARNING PER MIL-S-19500
SEE PAGE I-388

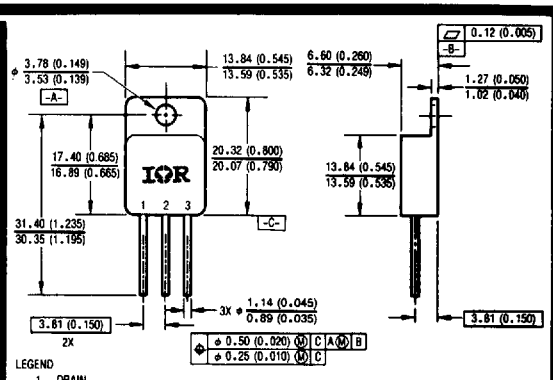

LEGEND
1 DRAIN
2 SOURCE
3 GATE

NOTES:
1 DIMENSIONING & TOLERANCING PER ANSI Y14.5M – 1982.
2 ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).

Conforms to JEDEC Outline TO-254AA*
Dimensions in Millimeters and (Inches)

*For leadform configurations see page I-388, fig. 15

查询"2N7237"供应商

Absolute Maximum Ratings

Parameter		IRFM9240, JANS, JANTXV, JANTX, 2N7237	Units
I_D @ V_{GS} = 10V, T_C = 25°C	Continuous Drain Current	−11	A
I_D @ V_{GS} = 10V, T_C = 100°C	Continuous Drain Current	−7.0	
I_{DM}	Pulsed Drain Current ①	−44	
P_D @ T_C = 25°C	Max. Power Dissipation	125	W
	Linear Derating Factor	1.0	W/K ⑤
V_{GS}	Gate-to-Source Voltage	±20	V
E_{AS}	Single Pulse Avalanche Energy ②	500	mJ
I_{AR}	Avalanche Current ①	−11	A
E_{AR}	Repetitive Avalanche Energy ①	12.5	mJ
dv/dt	Peak Diode Recovery dv/dt ③	−5.0	V/ns
T_J T_{STG}	Operating Junction Storage Temperature Range	−55 to 150	°C
	Lead Temperature	300 (0.063 in. (1.6 mm) from case for 10s)	
	Weight	9.3 (typical)	g

Electrical Characteristics @ T_J = 25°C (Unless Otherwise Specified)

Parameter		Min.	Typ.	Max.	Units	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	−200	—	—	V	V_{GS} = 0V, I_D = −1.0 mA
$\Delta BV_{DSS}/\Delta T_J$	Temperature Coefficient of Breakdown Voltage	—	−0.20	—	V/°C	Reference to 25°C, I_D = −1.0 mA
$R_{DS(on)}$	Static Drain-to-Source On-State Resistance	—	—	0.51	Ω	V_{GS} = −10V, I_D = −7.0A ④
		—	—	0.52		V_{GS} = −10V, I_D = −11A
$V_{GS(th)}$	Gate Threshold Voltage	−2.0	—	−4.0	V	V_{DS} = V_{GS}, I_D = −250 μA
g_{fs}	Forward Transconductance	4.0	—	—	S (℧)	V_{DS} ≥ −15V, I_{DS} = −7.0A ④
I_{DSS}	Zero Gate Voltage Drain Current	—	—	−25	μA	V_{DS} = 0.8 x Max. Rating, V_{GS} = 0V
		—	—	−250		V_{DS} = 0.8 x Max. Rating V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Leakage Forward	—	—	−100	nA	V_{GS} = −20V
I_{GSS}	Gate-to-Source Leakage Reverse	—	—	100		V_{GS} = 20V
Q_g	Total Gate Charge	28	—	60	nC	V_{GS} = −10V, I_D = −11A
Q_{gs}	Gate-to-Source Charge	3.0	—	15		V_{DS} = 0.5 x Max. Rating
Q_{gd}	Gate-to-Drain ("Miller") Charge	4.5	—	38		See Fig. 6 and 14
$t_{d(on)}$	Turn-On Delay Time	—	—	35	ns	V_{DD} = −100V, I_D = −7.0A, R_G = 9.1Ω
t_r	Rise Time	—	—	85		
$t_{d(off)}$	Turn-Off Delay Time	—	—	85		See Fig. 11
t_f	Fall Time	—	—	65		
L_D	Internal Drain Inductance	—	8.7	—	nH	Measured from the drain lead, 6 mm (0.25 in.) from package to center of die.
L_S	Internal Source Inductance	—	8.7	—		Measured from the source lead, 6 mm (0.25 in.) from package to source bonding pad.
						Modified MOSFET symbol showing the internal inductances. 
C_{iss}	Input Capacitance	—	1200	—	pF	V_{GS} = 0V, V_{DS} = −25V
C_{oss}	Output Capacitance	—	570	—		f = 1.0 MHz
C_{rss}	Reverse Transfer Capacitance	—	81	—		See Fig. 5
C_{DC}	Drain-to-Case Capacitance	—	12	—		

查询"2N7237"供应商

Source-Drain Diode Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	—	—	-11	A	Modified MOSFET symbol showing the integral Reverse p-n junction rectifier.
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	-44		
V_{SD}	Diode Forward Voltage	—	—	-4.6	V	T_J = 25°C, I_S = -11A, V_{GS} = 0V ④
t_{rr}	Reverse Recovery Time	—	—	440	ns	T_J = 25°C, I_F = -11A, di/dt ≤ -100 A/μs ④
Q_{RR}	Reverse Recovery Charge	—	—	7.2	μC	V_{DD} ≤ -50V
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by L_S + L_D.				

Thermal Resistance

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
R_{thJC}	Junction-to-Case	—	—	1.0	K/W ⑤	
R_{thCS}	Case-to-Sink	—	0.21	—		Mounting surface flat, smooth, and greased
R_{thJA}	Junction-to-Ambient	—	—	48		Typical socket mount

① Repetitive Rating; Pulse width limited by maximum junction temperature (see figure 9) Refer to current HEXFET reliability report

② @ V_{DD} = -50V, Starting T_J = 25°C, L ≥ 6.2 mH, R_G = 25Ω, Peak I_L = -11A

③ I_{SD} ≤ -11A, di/dt ≤ -150 A/μs, V_{DD} ≤ BV_{DSS}, T_J ≤ 150°C Suggested R_G = 9.1Ω

④ Pulse width ≤ 300 μs; Duty Cycle ≤ 2%

⑤ K/W = °C/W W/K = W/°C

查询"2N7237"供应商

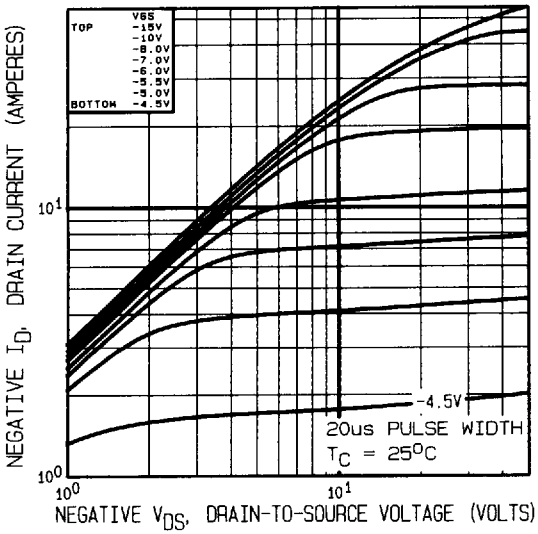

Fig. 1 — Typical Output Characteristics, T_C = 25°C

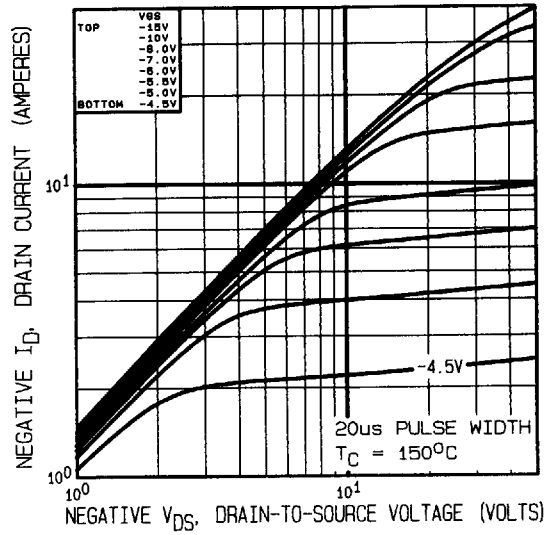

Fig. 2 — Typical Output Characteristics, T_C = 150°C

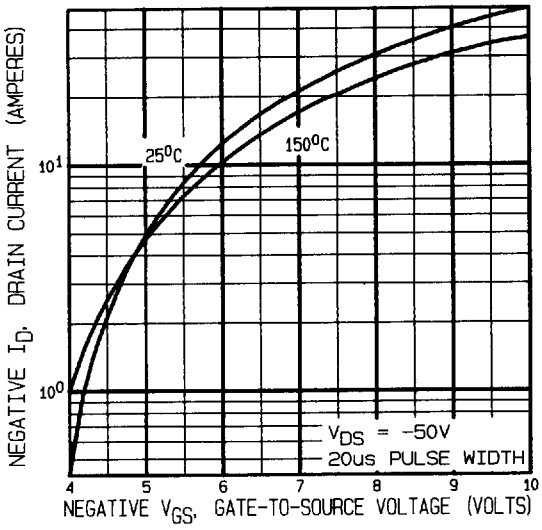

Fig. 3 — Typical Transfer Characteristics

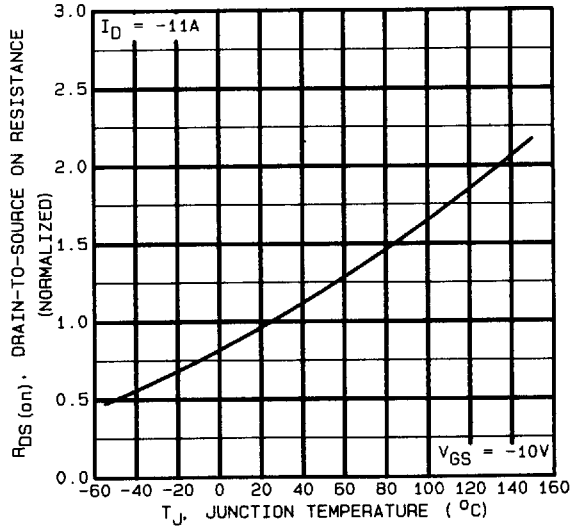

Fig. 4 — Normalized On-Resistance Vs. Temperature

查询"2N7237"供应商

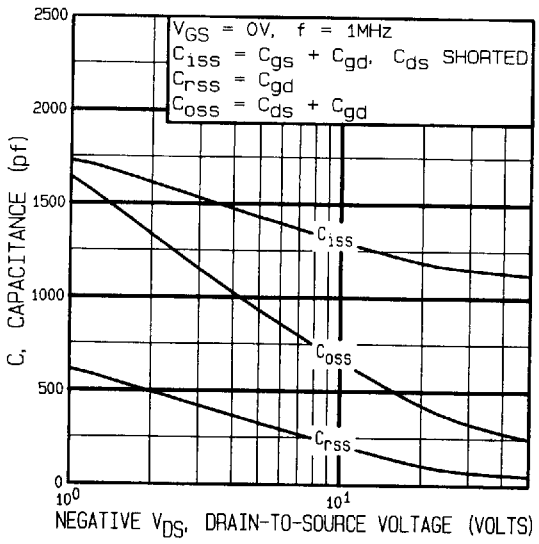

Fig. 5 — Typical Capacitance Vs. Drain-to-Source Voltage

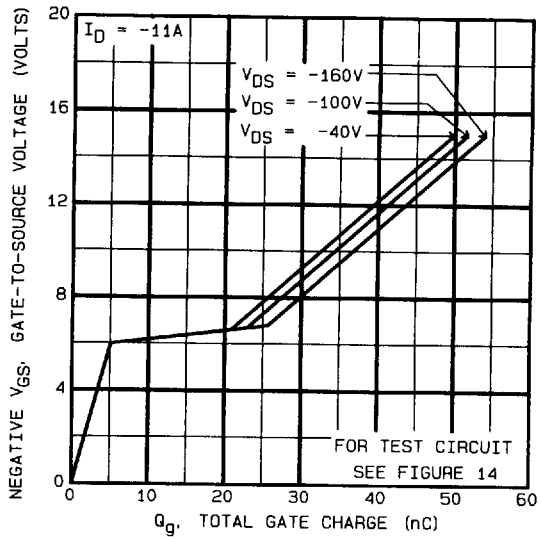

Fig. 6 — Typical Gate Charge Vs. Gate-to-Source Voltage

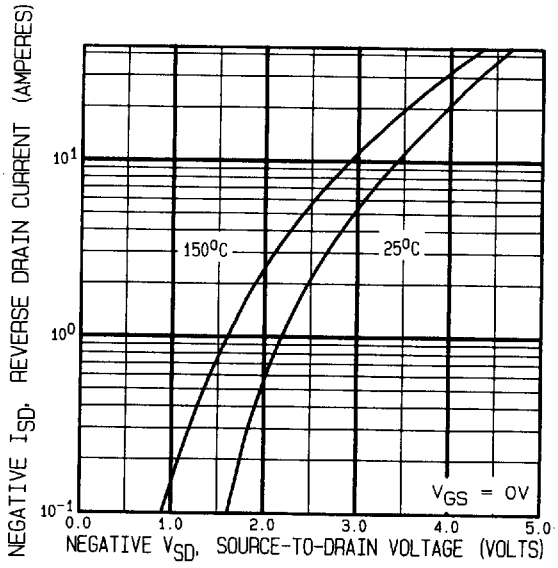

Fig. 7 — Typical Source-Drain Diode Forward Voltage

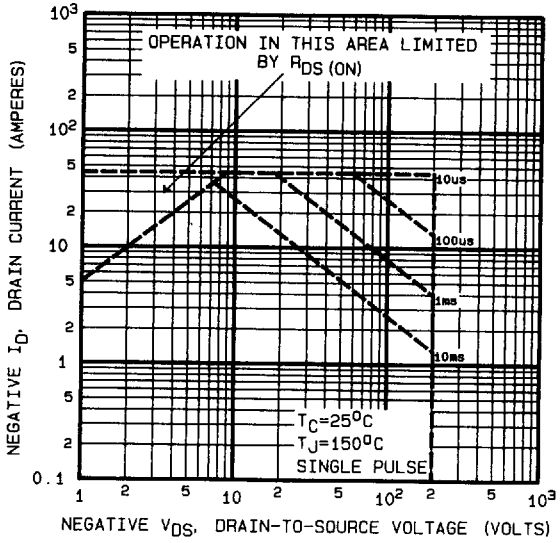

Fig. 8 — Maximum Safe Operating Area

查询"2N7237"供应商

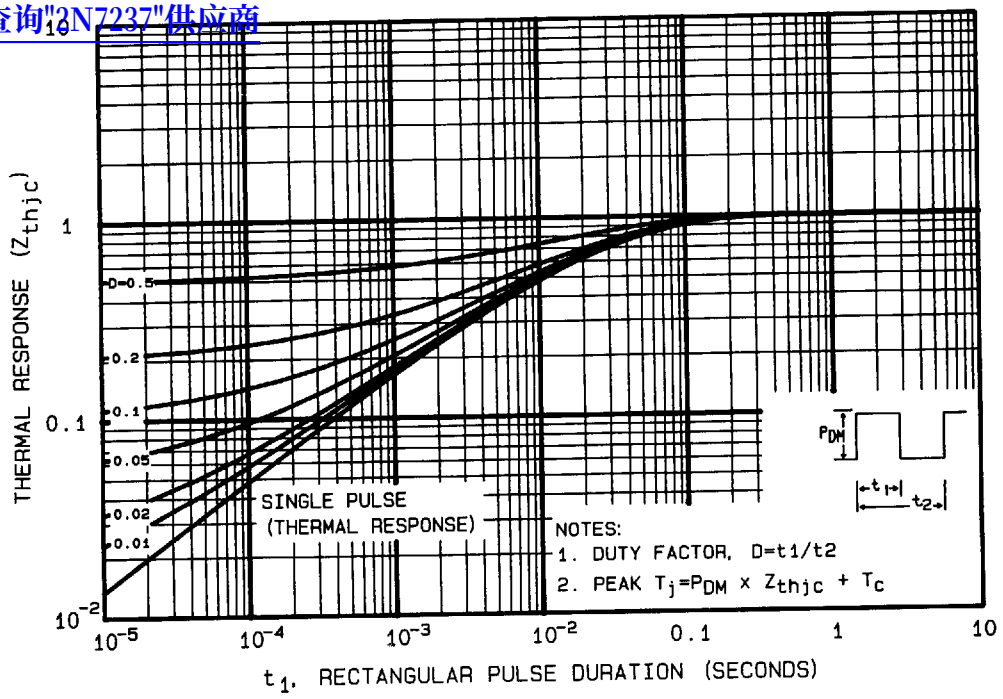

Fig. 9 — Maximum Effective Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration

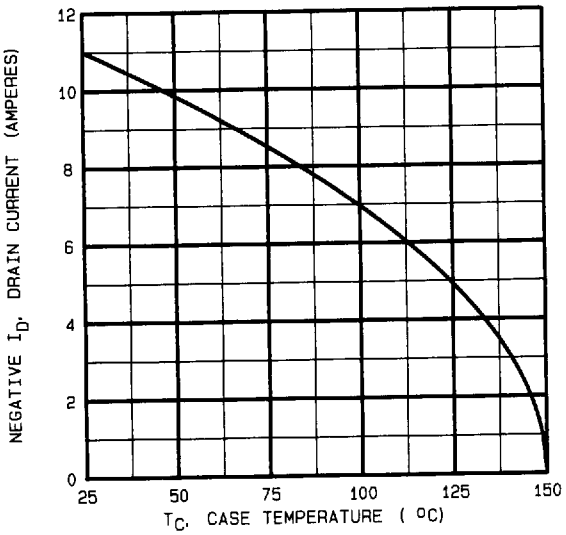

Fig. 10 — Maximum Drain Current Vs. Case Temperature

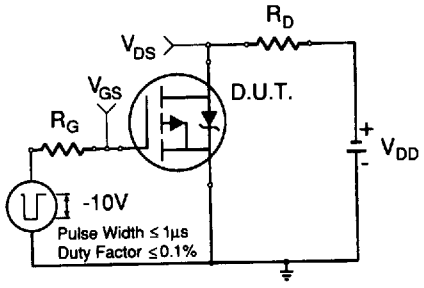

Fig. 11a — Switching Time Test Circuit

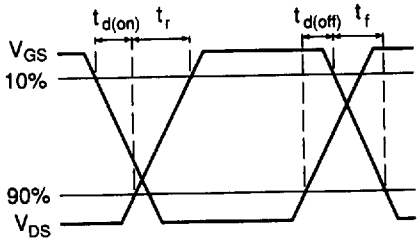

Fig. 11b — Switching Time Waveforms

查询"2N7237"供应商

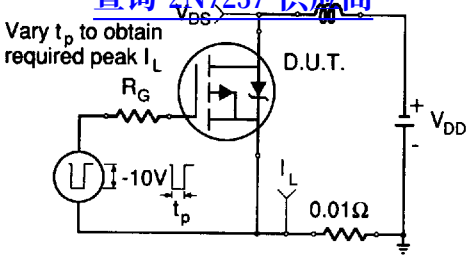

Fig. 12a — Unclamped Inductive Test Circuit

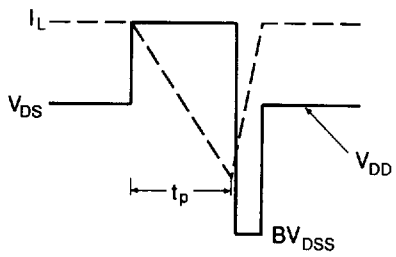

Fig. 12b — Unclamped Inductive Waveforms

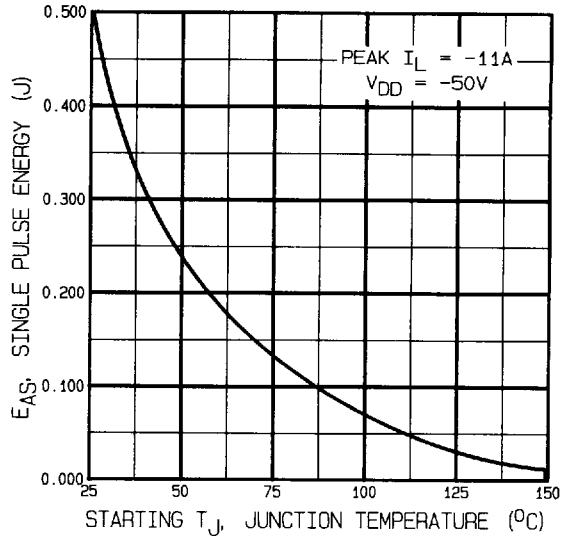

Fig. 12c — Maximum Avalanche Energy Vs. Starting Junction Temperature

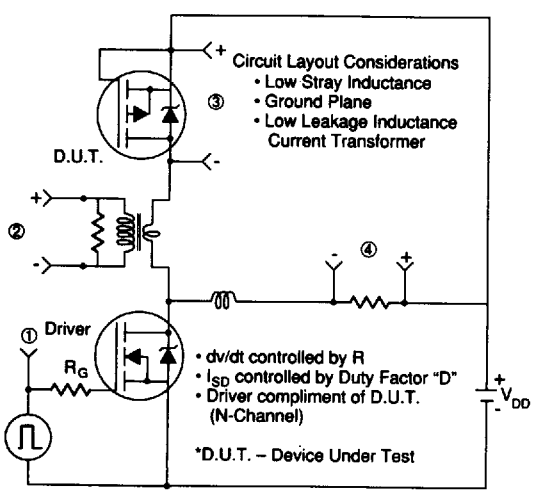

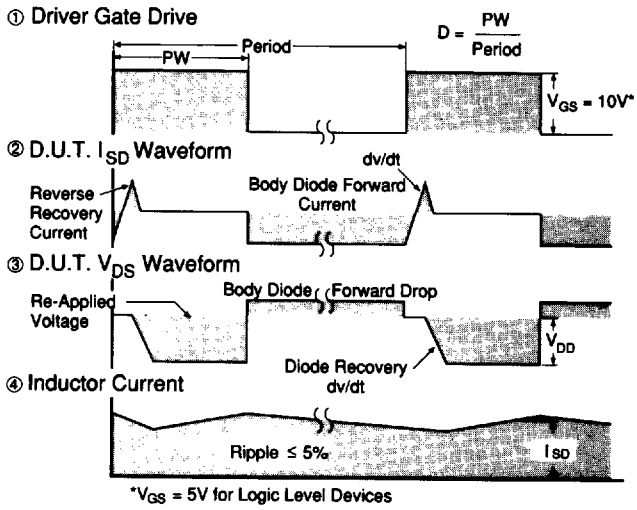

Fig. 13 — Peak Diode Recovery dv/dt Test Circuit

查询"2N7237"供应商

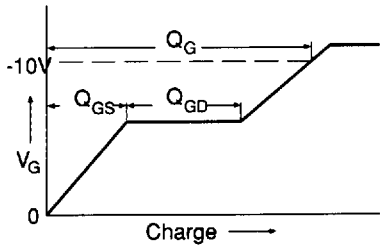

Fig. 14a — Basic Gate Charge Waveform

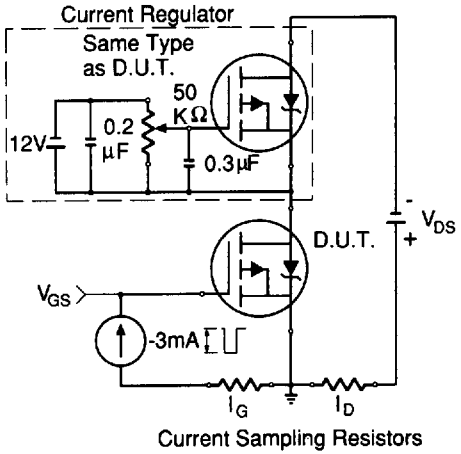

Fig. 14b — Gate Charge Test Circuit

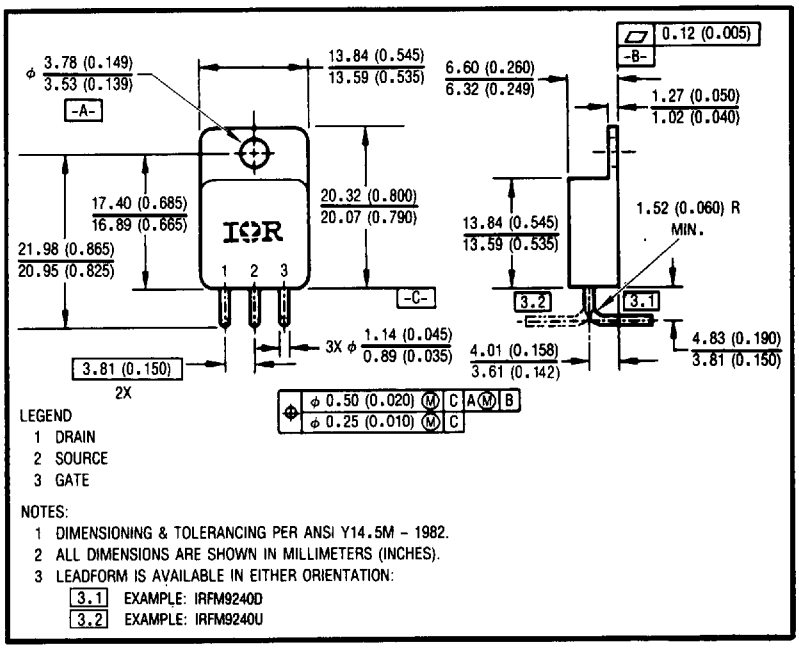

Fig. 15 – Optional Leadforms for Outline TO-254

BERYLLIA WARNING PER MIL-S-19500

Packages containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxide packages shall not be placed in acids that will produce fumes containing beryllium.