


Features:



- 10.7 MHz
- Series CA or CV
- Consumer electronics
- Individual specification: A5, S2, S3 or J

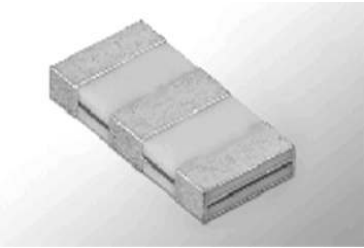

LTCA
LTCV

Specifications				
Part	LTCA			
	A5-	S2-	S3-	J-
3db band width (kHz)	280 +/-50	230 +/-50	180 +/-40	150 +/-40
20db band width (kHz) max	650	600	520	430
Insertion loss (dB) max	6	6	7	10
Spurious attenuation (9 ~ 12MHz) (dB) min	30	30	30	30

Specifications				
Part	LTCV			
	A5-	S2-	S3-	J-
3db band width (kHz)	280 +/-50	230 +/-50	180 +/-40	150 +/-40
20db band width (kHz) max	590	510	470	380
Insertion loss (dB) max	3.0 +/-2.0	3.5 +/-2.0	4.0 +/-2.0	10
Spurious attenuation (9 ~ 12MHz) (dB) min	35	35	35	30

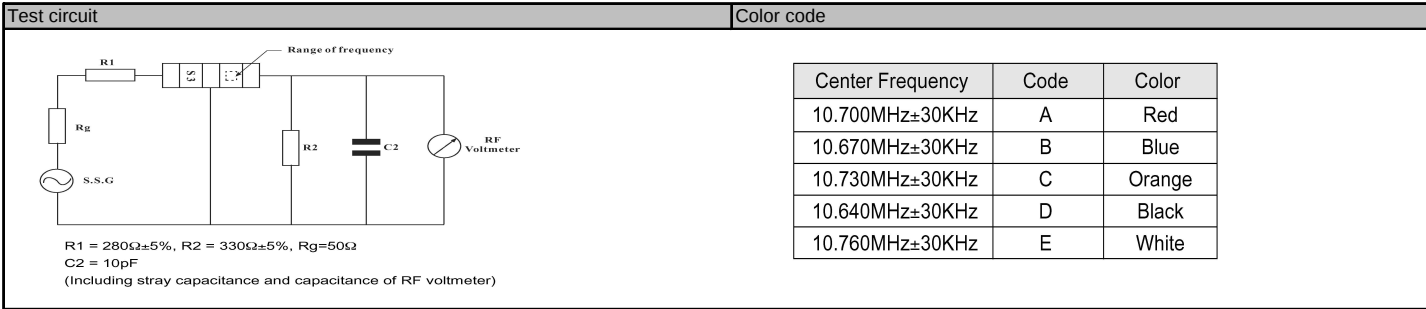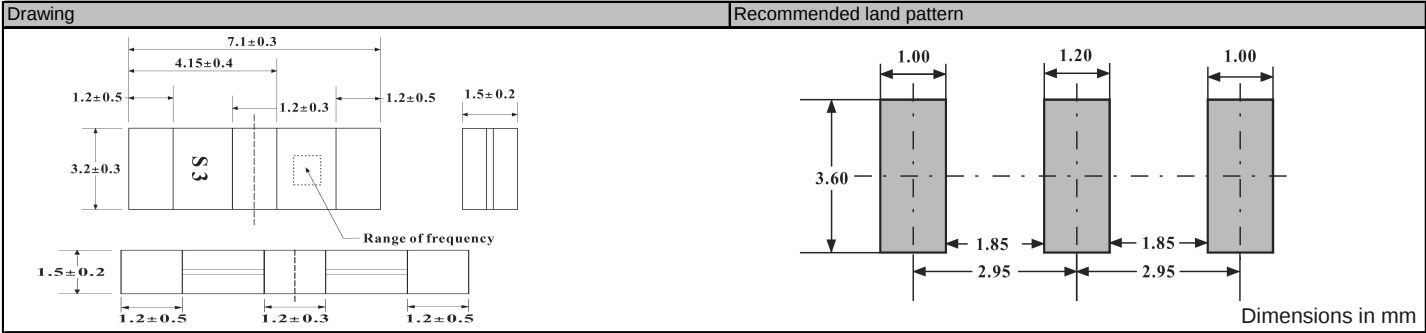

Order key				
F	- LTCA	- A5	- 10.700 M	-
Part	Package	Individual specification	Center frequency M = MHz. K = KHz	Opion
F= Ceramic filter	LTCA LTCV	A5 S2 S3 J	10.700 MHz (= A = red) 10.670 MHz (= B = blue) 10.730 MHz (= C = orange) 10.640 MHz (= D = black) 10.760 MHz (= E = white) 450 ~ XXX ~ 470 KHz	blanc = standard X=Special options

Remarks: All specifications subject to change without notice!