


查询"27C010RPFB-20"供应商

1 Megabit PROM - Radiation Hardened 27C010RP

128k x 8 bit PROM
Memory Microcircuit

For Space Applications

SEI's 27C010RP (RP for RAD-PAK®) memory microcircuit features a minimum 100 kilorad (Si) total dose tolerance. Using SEI's radiation hardened RAD-PAK® packaging technology, the 27C010RP is fully equivalent to the commercial Texas Instruments TMS27C010. It uses CMOS technology for high speed and simple interface with MOS and bipolar circuits. All inputs, including program data inputs, can be driven by Series 74 TTL circuits. Each output can drive one Series 74 TTL circuit without external resistors. The data outputs are three-state for connecting multiple devices to a common bus. All programming signals are TTL level. For programming outside the system, existing EPROM programmers can be used. The patented radiation hardened RAD-PAK® technology incorporates radiation shielding in the microcircuit package. The 27C010RP has a total dose survivability of greater than 100 krad (Si). Capable of surviving in space environments, the 27C010RP is ideal for satellite, spacecraft, and space probe missions. This product is offered as a one time programmable product. It is available in Class S packaging and screening.

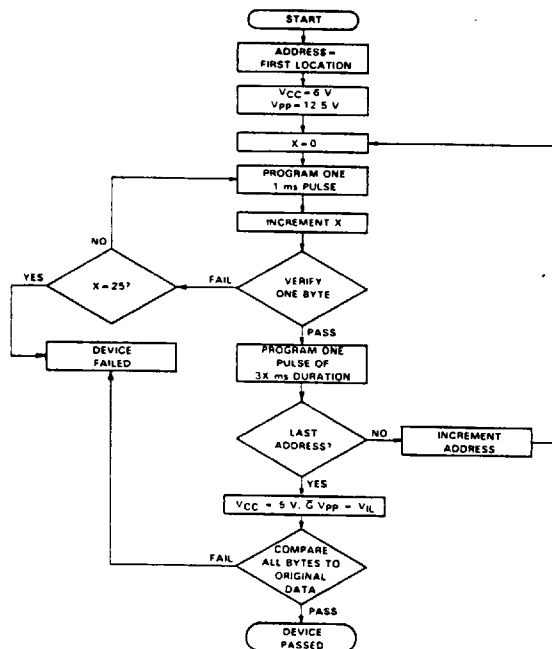


SPACE
ELECTRONICS
INCORPORATED

Tel: (619) 452-4167 Fax: (619) 452-5499
INTERNET: 102005.1635.COMPUSEVE.COM

Radiation Hardened 27C010RP

CMOS 32 Pin
Memory Microcircuit

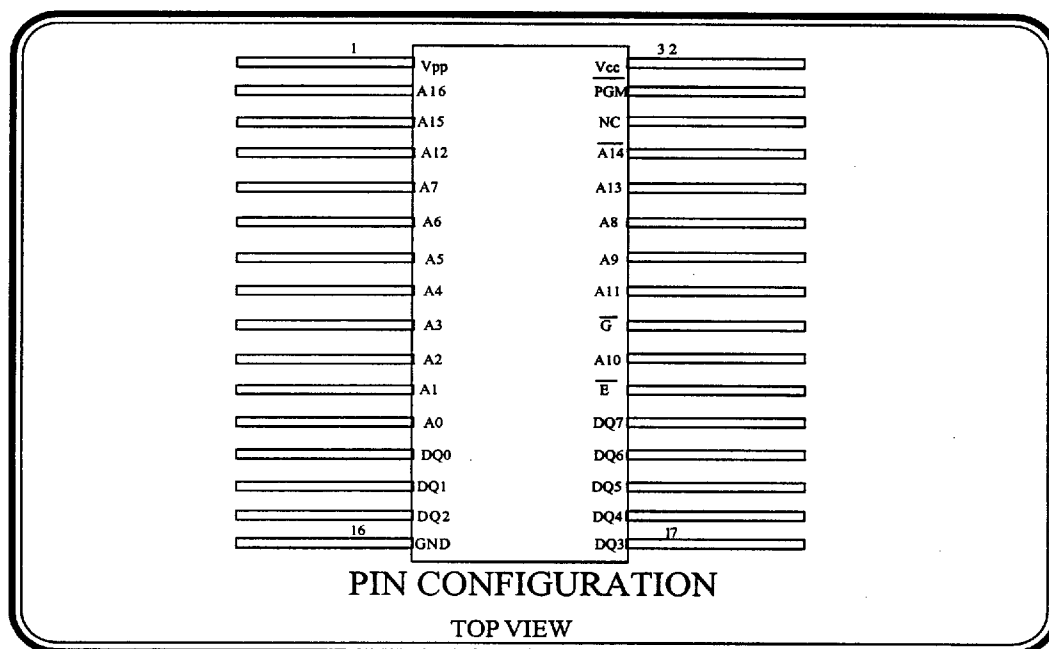

Features:

- 128k x 8 Bit Organization
 - One Time Programmable
- Pin Compatible with Texas Instruments TMS27C010
- RAD-PAK™ Radiation Hardened Against Natural Space Radiation
- Total Dose Hardness >100 krad (Si)
- Package:
 - 32 Pin RAD-PAK™ flat pack (410 mils x 820 mils)
 - Weight – 6.0 grams
- High Speed:
 - 200, 250, 300 ns Maximum Access Times Available
- Power-saving CMOS Technology
 - Single 5 Volt power supply
 - High-speed SNAP! pulse programming
 - All inputs/outputs fully TTL compatible
 - Latchup immunity of 250 mA on all input and output pins
 - No pullup resistors required
- Low Power Dissipation (Vcc=5.5V)
 - Active: 165 mW worst case
 - Standby: 550 uW worst case
- 3-state output buffers

Specifications and design are subject to change without notice.



June 1994

For Further Information Contact:

Space Electronics Inc.
4031 Sorrento Valley Blvd., San Diego, CA 92121
(619) 452-4167 Fax (619) 452-5499
INTERNET: 102005.1635@COMPUSERVE.COM

27C010RP Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply voltage range	V_{CC}	-0.6	7	V
Supply voltage range	V_{PP}	-0.6	14	V
Input voltage range All inputs except A9		-0.6	$V_{CC}+1$	V
A9		-0.6	13.5	V
Output voltage range		-0.6	$V_{CC}+1$	V
Normal operating temperature		-55	125	°C
Storage temperature range		-65	150	°C

27C010RP Recommended Operating Conditions¹

Parameter	Symbol	Min	Max	Unit
Supply voltage	V_{CC}			
Read mode		4.5	5.5	V
SNAP! Pulse programming algorithm		6.25	6.75	V
Supply voltage	V_{PP}			
Read mode		$V_{CC}-0.6$	$V_{CC}+0.6$	V
SNAP! Pulse programming algorithm		12.75	13.25	V
High-level input voltage	V_{IH}			
TTL		2	$V_{CC}+0.5$	V
CMOS		$V_{CC}-0.2$	$V_{CC}+0.5$	V
Low-level input voltage	V_{IL}			
TTL		-0.5	0.8	V
CMOS		-0.5	GND+0.2	V
Normal operating temperature range	T_A	-55	125	°C

Notes:

1. $T_A = 25^\circ\text{C}$, $V_{CC} = 6.5\text{V}$, $V_{PP} = 13\text{V}$



SPACE ELECTRONICS INC.

4031 SORRENTO VALLEY BLVD.
 SAN DIEGO, CA 92121
 PHONE: (619) 452-4167
 FAX: (619) 452-5499
 INTERNET: 102005.1635@COMPUSERVE.COM

9011241 0000123 907 122

27C010RP DC Electrical Characteristics

Parameter	Symbol	Min	Max	Unit
High-level output voltage $I_{OH} = -20 \mu A$ $I_{OH} = -2.5 mA$	V_{OH}	$V_{CC} - 0.2$ 3.5		V
Low-level output voltage $I_{OL} = 2.1 mA$ $I_{OL} = 20 \mu A$	V_{OL}		0.4 0.1	V
Input current (leakage): $V_I = 0 V$ to $5.5 V$	I_I		± 1	μA
Output current (leakage): $V_O = 0 V$ to V_{CC}	I_O		± 1	μA
V_{PP} supply current: $V_{PP} = V_{CC} = 5.5 V$	I_{PP1}		10	μA
V_{PP} supply current (during program pulse): $V_{PP} = 13 V$	I_{PP2}		50	mA
V_{CC} supply current (standby) TTL-input level $V_{CC} = 5.5 V, E = V_{IH}$ CMOS-input level $V_{CC} = 5.5 V, E = V_{CC} \pm 0.2 V$	I_{CC1}		500 100	μA μA
V_{CC} supply current (active) $V_{CC} = 5.5 V, E = V_{IL}$ t_{cycle} = minimum cycle time, outputs open	I_{CC2}		30	mA



SPACE ELECTRONICS INC.

4031 SORRENTO VALLEY BLVD.
SAN DIEGO, CA 92121
PHONE: (619) 452-4167
FAX: (619) 452-5499
INTERNET: 102005.1635@COMPUSERVE.COM

27C010RP AC Electrical Performance

Parameter	Symbol	Min	Max	Unit
Access time from address 27C010-20 27C010-25 27C010-30	$t_{a(A)}$		200 250 300	ns
Access time from chip enable 27C010-20 27C010-25 27C010-30	$t_{a(E)}$		200 250 300	ns
Output enable time from $G\backslash$ 27C010-20 27C010-25 27C010-30	$t_{en(G)}$		75 85 90	ns
Output disable time from $G\backslash$ or $E\backslash$, whichever occurs first 27C010-20 27C010-25 27C010-30	t_{dis}	0 0 0	50 60 70	ns
Output data valid time after change of address, $E\backslash$, or $G\backslash$, whichever occurs first 27C010-20 27C010-25 27C010-30	$t_{v(A)}$	0 0 0		ns
Input capacitance $V_I = 0\text{ V}$, $f = 1\text{ MHz}$	C_i		10	pF
Output capacitance $V_O = 0\text{ V}$, $f = 1\text{ MHz}$	C_o		12	pF



SPACE ELECTRONICS INC.

4031 SORRENTO VALLEY BLVD.
SAN DIEGO, CA 92121
PHONE: (619) 452-4167
FAX: (619) 452-5499
INTERNET: 102005.1635@COMPUSERVE.COM


9011241 0000125 78T 124

Parameter	Symbol	Min	Max	Unit
Program pulse duration	$t_{W(PGM)}$	95	105	us
Address setup time	$t_{su(A)}$	2		us
E\ setup time	$t_{su(E)}$	2		us
G\ setup time	$t_{su(G)}$	2		us
Data setup time	$t_{su(D)}$	2		us
V_{PP} setup time	$t_{su(VPP)}$	2		us
V_{CC} setup time	$t_{su(VCC)}$	2		us
Address hold time	$t_{h(A)}$	0		us
Data hold time	$t_{h(D)}$	2		us


NOTES:

1. $T_A = 25^\circ\text{C}$, $V_{CC} = 6.5\text{V}$, $V_{PP} = 13\text{V}$ **SPACE ELECTRONICS INC.**4031 SORRENTO VALLEY BLVD.
SAN DIEGO, CA 92121
PHONE: (619) 452-4167
FAX: (619) 452-5499
INTERNET: 102005.1635@COMPUSERVE.COM

AC Testing Input/Output Wave Forms



Read Cycle Timing

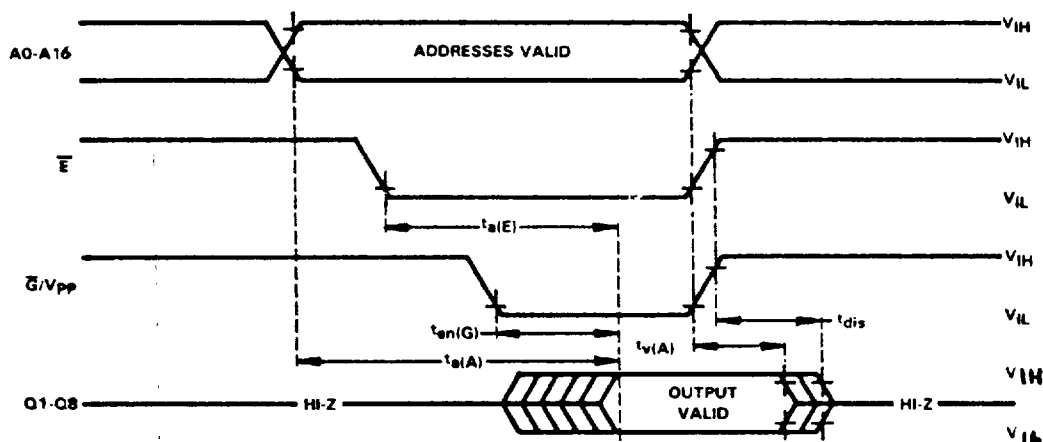

SPACE ELECTRONICS INC.

9011241 0000127 552

126

4031 SORRENTO VALLEY BLVD.
SAN DIEGO, CA 92121
PHONE: (619) 452-4167
FAX: (619) 452-5499
INTERNET: 102005.1635@COMPUSERVE.COM