


查询"56480"供应商

530-773-

SOCKET OUTLET
13 AMP

SURFACE
TO IP56

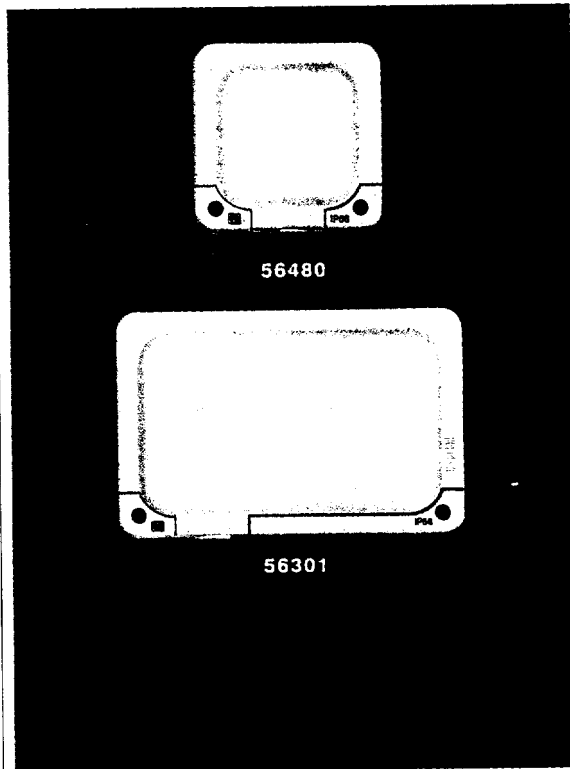

56480
1 gang Unswitched



56301
1 gang DP Switched
RCD protected 30mA
Active Sentrysocket
Pulsating DC fault current
sensitive.



Fixing holes are for No 8 woodscrews (not supplied)

The 1 gang enclosure has 4 x 20mm entries, 1 on each edge and is supplied with an earth terminal and a loop terminal in the back box. The Sentrysocket has 5 entries.

Dimensions:
1 gang Socket Outlet: 95 x 95 x 80mm
1 gang Sentrysocket: 175 x 115 x 80mm

BS.1363: 1984

IMPORTANT
Active Control Circuit

The Sentrysocket incorporates a "RE-SET" mechanism and is mains failure sensitive, i.e. it will function under all normal conditions expected of an RCD but it will also trip in the event of a power cut. This makes it ideal for use where it would be hazardous for equipment to suddenly energise after a power cut, such as rotating machinery and heat developing apparatus.

Some chemicals and synthetic oils can harm polycarbonate. Please refer to MK Technical Services Dept.

★ NEW PRODUCTS



A stylish range of switches and sockets made from tough polycarbonate which allow the means to use electricity safely outdoors and in areas exposed to dust and splashing water.

The Masterseal sockets are unique in that they can seal around virtually any standard 13 amp plug.