




[查询"M2-12US07"供应商](#)

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 160g only
- Efficiency 71%~82%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0 ~40

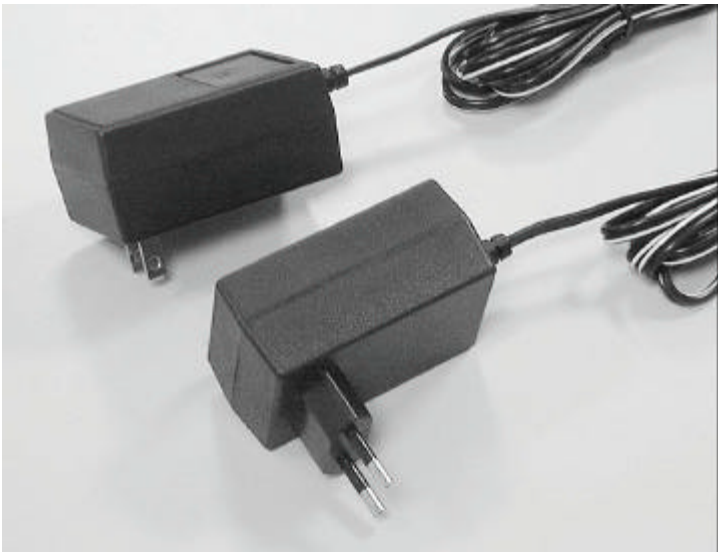

SPECIFICATION

Item	Model	M2-12US05~07	M2-15US07~09	M2-15US09~12	M2-15US12~17	* M2-18US17~24
Output Voltage		5V~7V	7V~9V	9V~12V	12V~17V	17~24V
Output Power		12.5W	15W	15W	15W	18W
Input Voltage		AC 90~264V				
Input Frequency		47~63Hz				
Input Current		0.6A Maximum				
Inrush Current		50A Maximum				
Line Regulation		2% Maximum				
Load Regulation		±5%				
Ripple & Noise		1% Maximum				
Efficiency		71%~82% Typical				
Temperature Coefficient		0.05%/				
Over-Voltage Protection		200% Maximum				
Operating Temperature		0~40				
Storage Temperature		-20~85				
Safety Description	Fig. A	UL, CUL, BSMI, PSE, CB				---
	Fig. B	---				---
	Fig. C	BSMI				---
	Fig. D	TUV, BSMI, CB				---

(*) : Under Development (I/P) : In Process
Above specification is for reference only, please contact for details.



查询"M2-12US07"供应商


Bothhandusa.com

ORDERING INFORMATION

M2- 15 US 055 - A - 1 A

Output Plug List
Mechanical
Output Voltage
Output Watts

MECHANICAL

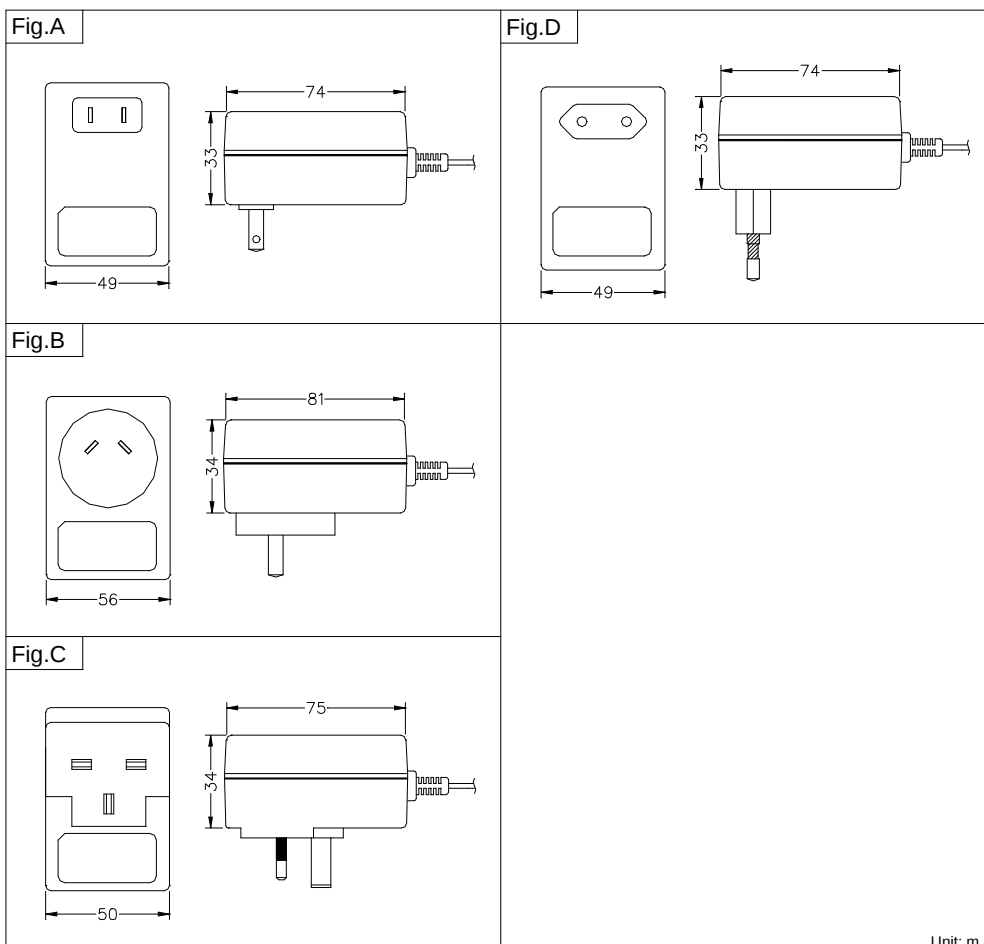

Unit: m.m.

Standard Output Cable:
5V~7V: 18AWG, UL SPT-1, 1800mm
8V~24V: 20AWG, UL 2468, 1800mm