

KMX Series Microminiature Tact Switch for SMT

[查询"KMX"供应商](#)



Features

- Ultra low profile 0.58mm
- Compact switch body; 4.5x4.5mm
- 1.6 and 2.2N sharp tactile feel
- 250k cycles
- $\varnothing$ 1.4mm actuator grounded
- RoHS compliant and compatible

Typical Applications

- Allows higher board density with compact SMT switch for ultra low profile environment: cell phones keypads, key fob, white goods, medical and military

Specification

FUNCTION: Snap action push-on type SPST/shielded
CONTACT TYPE: Normally open
TERMINALS: Gullwing type for SMT

Mechanical

MAXIMUM ACTUATING FORCE/LIFE: 20 N for 1,000 cycles

Type	Operating force Newtons (grams)	Operating life (operations)	Travel
KMX211G/213G	1.6 (160) $\pm$ 30%	250,000	0,20 $\pm$ 0,10
KMX221G/223G	2.2 (220) $\pm$ 30%	250,000	0,20 $\pm$ 0,10

Packaging

Switches are delivered in tape and reels of 10,000 pieces. The reel diameter is 380 (14.961). The tape dimensions conform to the EIA-RS-481 and EC-286-6 norms.

Electrical

	Silver	Gold
MAXIMUM POWER:	0.5 VA	0.5 VA
MAXIMUM VOLTAGE:	32 VDC	32 VDC
MAXIMUM CURRENT DC:	50 mA	20 mA
MINIMUM CURRENT DC:	1 mA	1 mA
CONTACT RESISTANCE:	$\leq$ 100 m Ω	
INSULATION RESISTANCE:	$\geq$ 50 M Ω	
BOUNCE TIME:	$\leq$ 6 ms	

Environmental


	Silver	Gold
OPERATING TEMPERATURE:	-40°C to 85°C	-40°C to 125°C
STORAGE TEMPERATURE:	-55°C to 85°C	-55°C to 125°C
RELATIVE HUMIDITY	90 to 96%	

Process

Compatible with infrared reflow, lead free soldering and pick and place SMT machines.

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

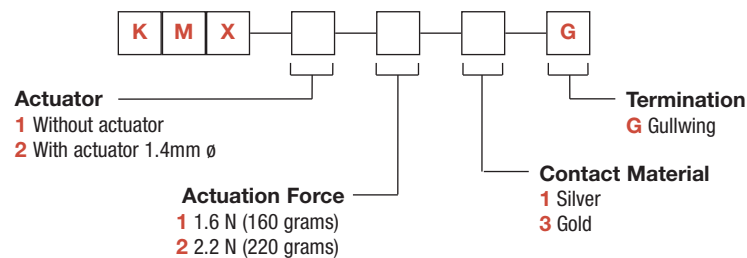


Microminiature Tact Switch for SMT

查询"KMX"供应商


ACTUATOR

KMX 1


PAD LAYOUT

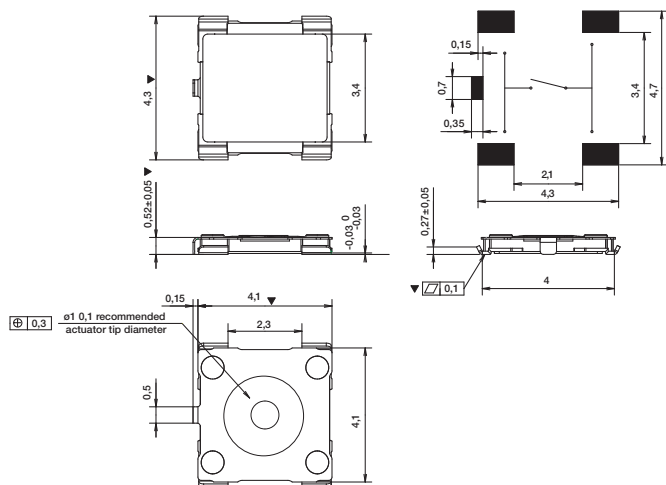

KMX 2

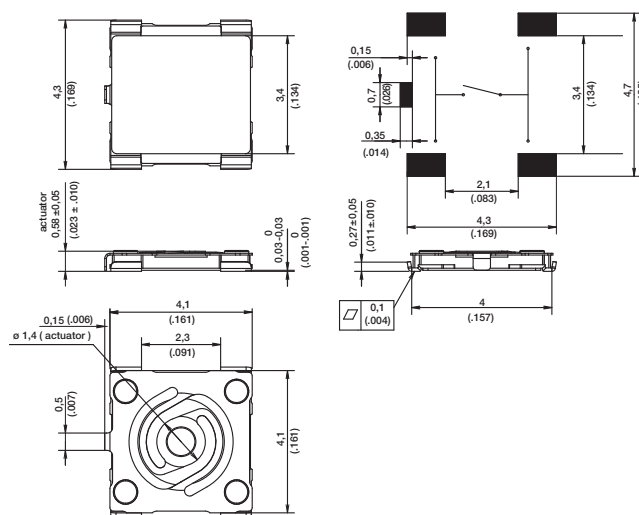

TAPE & REEL

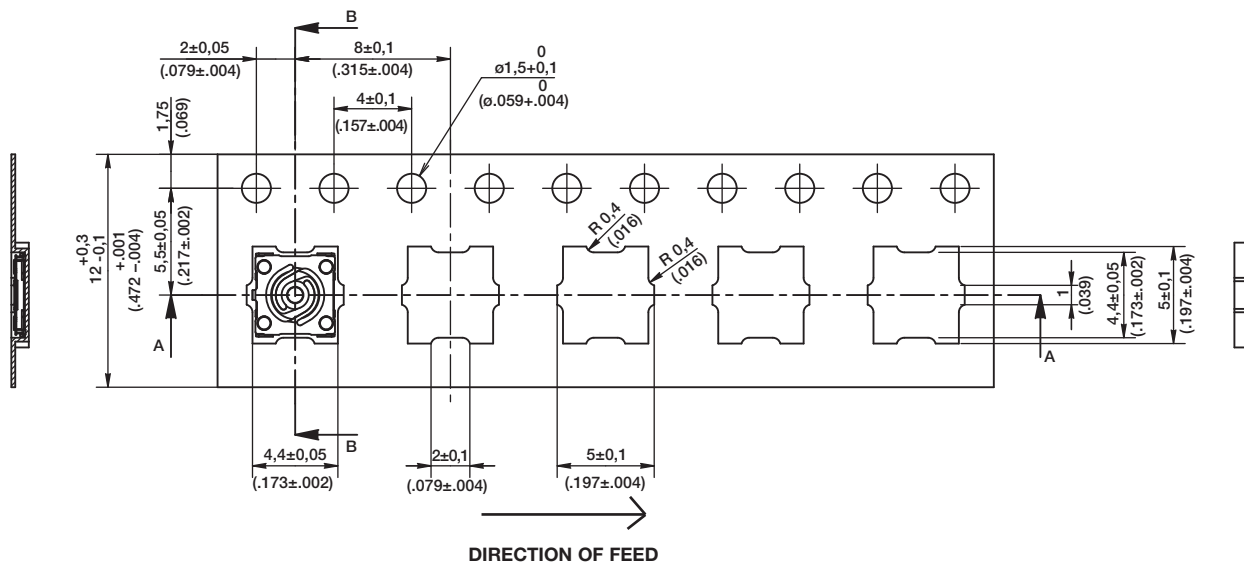

Dimensions shown in: mm (inch)
Specifications and dimensions subject to change

www.ittcannon.com