


查询中... 供应...

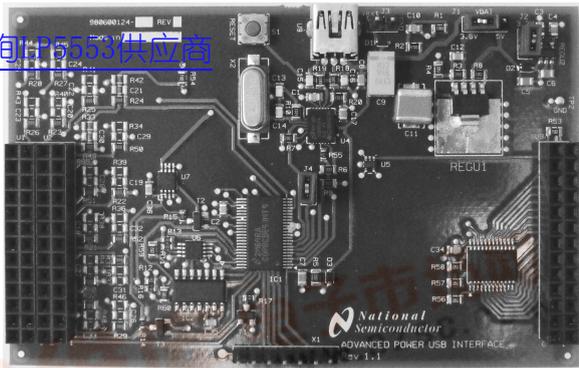

30065903

FIGURE 2. USB Interface Board

Evaluation Board

The evaluation board has the LP5553 circuit on the middle of the board with the required external components placed around it. Test posts for the pins of the LP5553 as well as the connectors for external power are placed on the edges of the board. The red LED near the power connectors indicates if the circuit is powered on and the green LED indicates the state of the PWROK signal. The LP5553 can be powered from the attached USB interface board or externally. If external power supply is used, V_{IN} and GND can be connected using the banana jacks (red for V_{IN} and black for GND) or V_{IN} and GND turrets. Jumper "VIN SEL" must be set to the appropriate power source. Schematic of the LP5553 evaluation board is presented in *Figure 15* at the end of the document. Note that when outputs of the LP5553 are loaded, external power may be required since the maximum current from the USB port is 500mA.

JUMPER	PURPOSE	NOTE
VIN SEL	Input voltage selection	MSTR: LP5553 powered from attached USB Interface board; DEFAULT EXT: LP5553 powered from external supply

There are two additional jumpers on the LP5553 evaluation board. They behave as follows.

JUMPER	PURPOSE	NOTE
JP1	Disconnect indicator LEDs and PWROK buffer	ON: The PWR ON and PWROK indicators are active; DEFAULT
		OFF: The buffer and LEDs will remain unpowered
JP2	Disconnect GPO pull-up resistors	ON: The 10K pull-up resistors are connected to the GPO pins; DEFAULT
		OFF: The GPO pull-up resistors are disconnected, for use with CMOS outputs

When LP5553 evaluation board is connected to the PC using the USB interface card and cable the SPMI commands for controlling the LP5553 are generated by the USB interface board. All signals related to the SPMI signalling environment are available on a 1x9 header on the edge of the board. If LP5553 evaluation board is operated standalone, this header allows external control of the SPMI. The pins are spaced at 100-mil intervals. The pin list is shown in *Table 1*. Input and output directions are with reference to LP5553. V_{IN} and V_{O2} are provided as reference voltages to determine the driver levels for the signals RESETN, ENABLE, PWROK, SDATA and SCLK. The external controller should drive ENABLE and RESETN between V_{IN} and GND, while SDATA and SCLK should be driven between V_{O2} and GND. The PWROK output will have logic-high output at V_{IN} .


TABLE 1.

Pin	Function	Type	Description
1	GND	GND	Ground
2	V_{IN}	Output	V_{IN} Sense
3	PWROK	Output	PWROK
4	RESETN	Input	V_{IN} : Active GND: LP5553 in reset
5	ENABLE	Input	V_{IN} : On GND: Disable LP5553
6	SPWI	Input/ Output	PWI Data
7	SCLK	Input	PWI Clock
8	V_{O2}	Output	V_{O2} Sense
9	GND	GND	Ground

LP5553 Evaluation Software

LP5553 evaluation software is provided to control the LP5553 evaluation board via USB connection. The evaluation software supports the SPMI commands required to control the LP5553. The evaluation software can read and write registers affecting the output voltages as well as other registers. By generating SPMI commands the evaluation software can also

control the operation modes of LP5553 such as sleep, wake-up, shutdown and reset. In addition to the SPMI commands the evaluation software can control the external control inputs of the LP5553: ENABLE and RESETN. The SPMI slave address can be set through the software. The USB interface board has an ADC and uses it to measure the voltage values of the core voltages and LDOs.

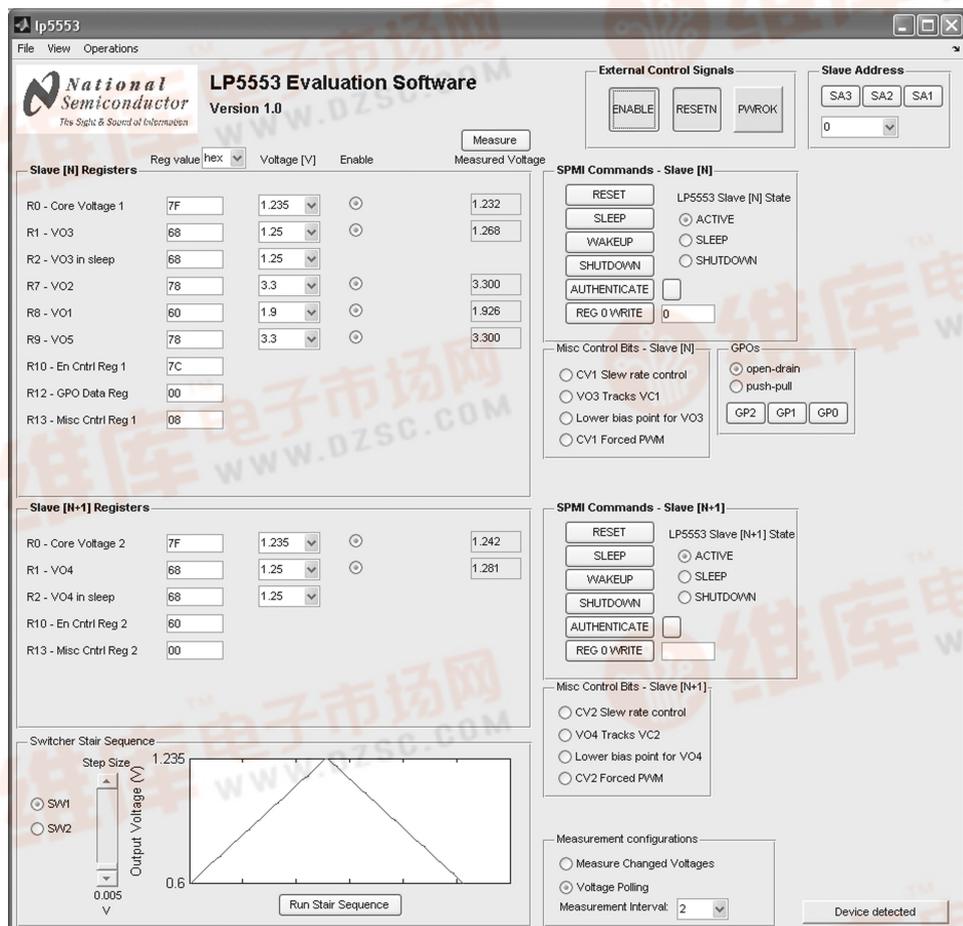

30065902

FIGURE 3. LP5553 Evaluation Software (Default View)

Getting Started

1. Unzip the LP5553 Evaluation Software to a specified folder by double-clicking the LP5553_sw_1.0.exe icon.
2. Install the MATLAB Component Runtime 7.5 to your computer by double-clicking on the MCRInstaller.exe icon in the folder where you unzipped the LP5553_sw_1.0.exe.
3. Add the following directory to your system path: <mcr_root>\v75\runtime\win32. On windows XP, this directory is automatically added to your path.
4. Connect the USB cable from the LP5553 evaluation board to the USB port of your PC. When plugging in the USB cable for the first time, operating system prompts about "new hardware found" and installs the USB driver automatically. With Win95 and Win98 operating systems the installation has to be accepted. Click "Next" several times as the installation proceeds.

5. Start LP5553 Evaluation Software by double-clicking the LP5553_GUI.exe icon. After start-up the evaluation software will automatically read the values of the registers on the LP5553 and will update the fields of the GUI. If all settings and connections are OK, the "Device detected" text should appear to the lower right corner of the evaluation software.

Evaluation Software Layout and Conventions

Register Control

Evaluation software has two different views to control the registers of the LP5553: Default view and button view.

The default view (Figure 3) has text fields that show the register values in hexadecimal, decimal or binary format. The format of the values can be selected using the popdown menu above the register value fields. By typing the value to the field

and pressing enter, the register write command is sent to the LP5553. For the voltage registers there are also popdown menus that allows to select the target voltage. By selecting voltage from these menus the appropriate value is written to the register adjusting output voltage to selected voltage level. Setting the register value through the value field or popdown menu, the other fields of the appropriate register are updated.

The radio buttons in the right side of the voltage selection popdown menus represent bits of enable control registers. Using enable buttons the corresponding output voltage can be disabled or enabled.

Selecting "Button View" from the "View" menu the evaluation software is changed to the button view (Figure 4).

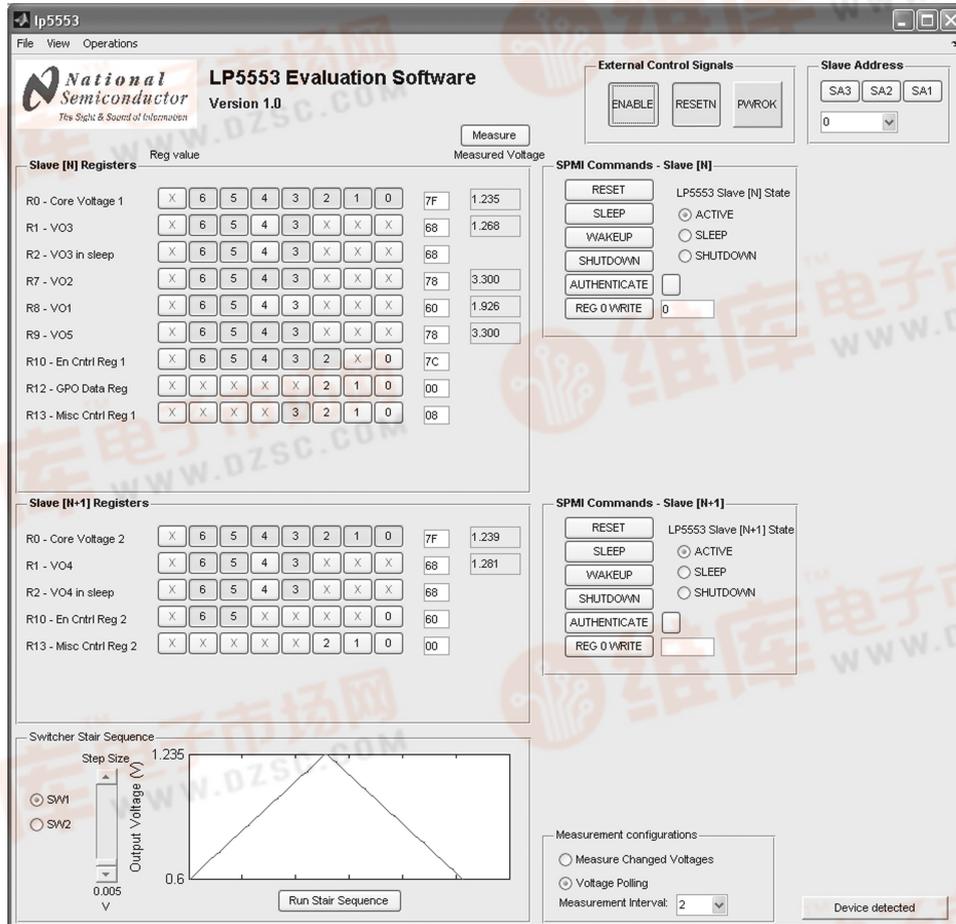


FIGURE 4. LP5553 Evaluation Software (Button View)

In the button view the register bits are shown as buttons. Register value is written whenever a button is pressed. The two-digit HEX-numbers in the right side of the buttons show the content of each register.

The output voltages can be measured by using ADCs in both views. On the right side of the register panels are fields for the measured output voltages. Voltages are measured when "Measure" button above the fields is pressed.

At the bottom right corner is a "Measurement configurations" panel. By selecting the "Measure Changed Voltages" option, the appropriate voltages are measured whenever the register value is changed. If "Voltage Polling" option is selected the voltages are measured at intervals that can be selected using the "Measurement interval" popdown menu on the bottom of the panel.

SPMI Commands

On the right side of the register panel are panels for SPMI commands for both slaves (Figure 5).

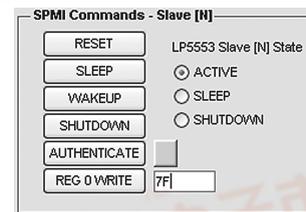


FIGURE 5. SPMI Commands panel

"Reset", "Sleep", "Wake up", "Shutdown", "Authenticate" and "Register 0 Write" SPMI sequences are sent when the command button is pressed. Slave operating states are represented on the right side of the command buttons.

• SPMI Commands:

- Reset: Sending the reset command initializes the SPMI slave and sets its registers to default



- Sleep: Sending the sleep command activates the sleep state of the SPMI slave. In the sleep state core voltage is 0V, memory voltage VO3/VO4 is controlled by its retention value (R2) and the other voltages retain their programmed values.
- Shutdown: Writing the shutdown command will cause the SPMI slave to switch off all regulators, thus causing all output voltages to go to zero. However LDO1, LDO2 and LDO3 act as shared resource between two slaves of the LP5553 and they will remain on when slave 'N' is in shutdown state as long as slave 'N + 1' is in active or sleep state. If only one of the slaves is in shutdown state it can be placed to active state by sending reset command to it. If both slaves are in shutdown, toggle 'ENABLE' or 'RESETN' to activate the outputs.
- Wakeup: Sending the wakeup command changes the SPMI slave from sleep state to active state. The core voltage returns to the default value and memory voltage tracks the core voltage (if VO3/4 tracks CV1/2 option is selected) or returns to the value determined by register R1.
- Authenticate: the authenticate command is a nine-frame sequence consisting of the authenticate-command followed by four challenge/response frame sequences. If authentication succeeds, the colour of the box in right side of the authenticate button will change to green.
- Register 0 write: This command adjusts the core voltage directly. Pressing the button, the hexadecimal value written to the text field will be written to the register R0. Command is also sent when enter is pressed after typing the value to the text field. This command has the same effect as executing a register write to the register R0. However this command requires only one frame, while register write command needs two frames to execute. New value of register R0 is also updated to the register panel.

Radio buttons on the right side of the SPMI command panels show the states of the slaves.

External Control Signals

- Control Inputs:
 - RESETN: controls hardware reset pin, active low, default = 1.
 - ENABLE: controls hardware enable pin, active high, default = 1.
- Status Outputs:
 - PWROK: if the evaluation board is correctly powered and at least one of the slaves is in active or sleep state, PWROK will be high and colour of this button will be green, otherwise it will be red.




FIGURE 6. External Control Signals panel

Slave Address

Slave address can be set with the buttons or selecting the address from popdown menu in "Slave address" panel (Figure 7) on the upper right corner of the GUI.



FIGURE 7. Slave Address setting panel

Misc Control Bits

The misc control bits panels (Figure 8) of both slaves (visible in default view) allow control the Misc Control Register bits (2:0):

- SW1/SW2 Slew Control
- LDO3/LDO4 Tracking Select
- LDO3/LDO4 Low IQ Bit

And bit 0 of the Enable Control registers:

- Forced PWM Mode




FIGURE 8. Misc Control Bits panel

Toggling of the radio buttons updates the appropriate bit to the registers in Registers panels.

GPOs

Buttons of GPO panel (visible in default view) (Figure 9) affect the bits of GPO register (slave 'N'). Open-drain and push-pull radio buttons affect the bit 3 of Misc Control Register 1.



FIGURE 9. GPOs panel

Measurement configurations

If "Measure Changed Voltages" radio button is toggled on, the appropriate voltages will be measured through ADCs, when register value is changed. If Voltage Polling is toggled on, all voltages will be measured at intervals selected by the "Measurement Interval" popdown menu.

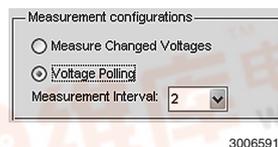


FIGURE 10. Measurement configurations panel

Switcher Stair Sequence

Pressing "Run Stair Sequence" will run a stair sequence for the core voltage. Affected core voltage can be selected from left side of the panel. Step size of the stair sequence can be

adjusted using the slider. Graph on the right side of the panel shows the effect of the step size.

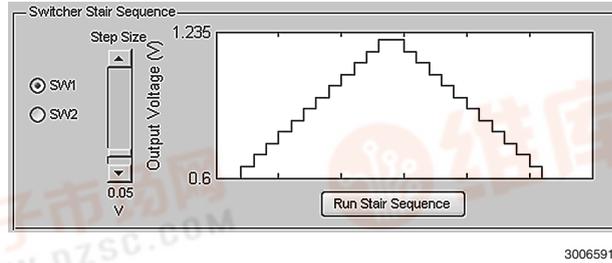


FIGURE 11. Switcher Stair Sequence panel

Menus

Menus of the GUI provide various operations and settings of the GUI.

File

- Open Profile: open a profile to overwrite the current settings of the LP5553 registers. This will open the “Select File to Open” dialog that allows select the text file containing the values of the registers. When file is opened the values from the file will be written to the registers.
- Save Profile: save the current register values to a text file
- Export Profile: creates a text file including names, addresses and values of each register as well as voltage values of core voltage and LDO outputs
- Exit: close the GUI



FIGURE 12. File menu

View

From View menu you can select the register view:

- Default View: register values presented in hexadecimal, decimal or binary format and voltage registers also as voltage values.

- Button View: register bits presented as buttons.




FIGURE 13. View Menu

Operations

- Read All Registers: read the register values from the LP5553 using read register SPMI commands.
- Registers to Default: sets all the register values to default
- Regulators to Max: sets values of the registers that affect to output voltages to max
- Regulators to Min: sets values of the registers that affects to output voltages to min



FIGURE 14. Operations menu

[查询LP5553供应商](#)

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH® Tools	www.national.com/webench
Audio	www.national.com/audio	App Notes	www.national.com/appnotes
Clock and Timing	www.national.com/timing	Reference Designs	www.national.com/refdesigns
Data Converters	www.national.com/adc	Samples	www.national.com/samples
Interface	www.national.com/interface	Eval Boards	www.national.com/evalboards
LVDS	www.national.com/lvds	Packaging	www.national.com/packaging
Power Management	www.national.com/power	Green Compliance	www.national.com/quality/green
Switching Regulators	www.national.com/switchers	Distributors	www.national.com/contacts
LDOs	www.national.com/ldo	Quality and Reliability	www.national.com/quality
LED Lighting	www.national.com/led	Feedback/Support	www.national.com/feedback
Voltage Reference	www.national.com/vref	Design Made Easy	www.national.com/easy
PowerWise® Solutions	www.national.com/powerwise	Solutions	www.national.com/solutions
Serial Digital Interface (SDI)	www.national.com/sdi	Mil/Aero	www.national.com/milaero
Temperature Sensors	www.national.com/tempsensors	SolarMagic™	www.national.com/solarmagic
Wireless (PLL/VCO)	www.national.com/wireless	Analog University®	www.national.com/AU

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at www.national.com



National Semiconductor Americas Technical Support Center
Email: support@nsc.com
Tel: 1-800-272-9959

National Semiconductor Europe Technical Support Center
Email: europe.support@nsc.com

National Semiconductor Asia Pacific Technical Support Center
Email: ap.support@nsc.com

National Semiconductor Japan Technical Support Center
Email: jpn.feedback@nsc.com