




PHASE NOISE (1 Hz BW, typical)

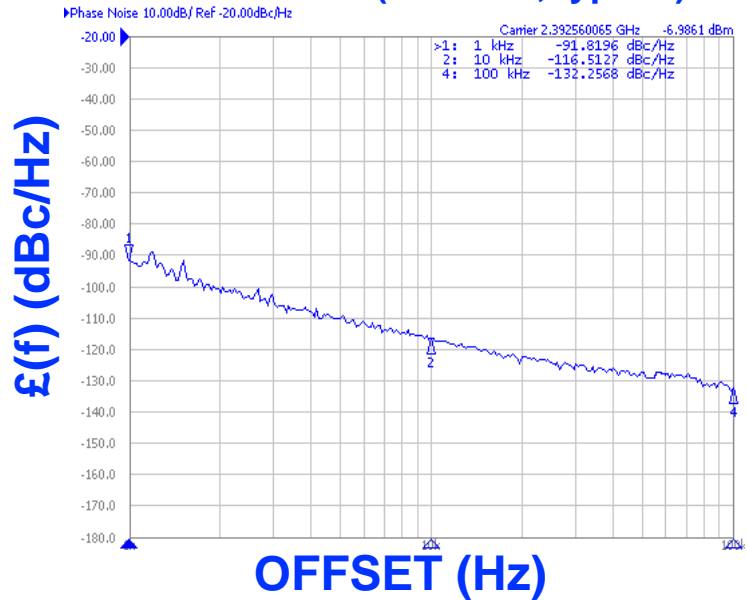

FEATURES
• Frequency Range: 2385 - 2400 MHz
• Tuning Voltage: 0.5-4.5 Vdc
• MINI-16 - Style Package

APPLICATIONS
• Digital Radio Equipment
• Fixed Wireless Access
• Satellite Communication Systems

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Oscillation Frequency Range	2385 - 2400	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-115	dBc/Hz
Harmonic Suppression (2nd, typ.)	-22	dBc
Tuning Voltage	0.5-4.5	Vdc
Tuning Sensitivity (avg.)	6.5	MHz/V
Power Output	3±2	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<1	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<1	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-16	

POWER SUPPLY REQUIREMENTS	VALUE	UNITS
Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	30	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES
• AN-100/1 : Mounting and Grounding of VCOs
• AN-102 : Proper Output Loading of VCOs
• AN-107 : How to Solder Z-COMM VCOs


NOTES:

查询"CRO2392A-LF"供应商

TUNING CURVE, typ.

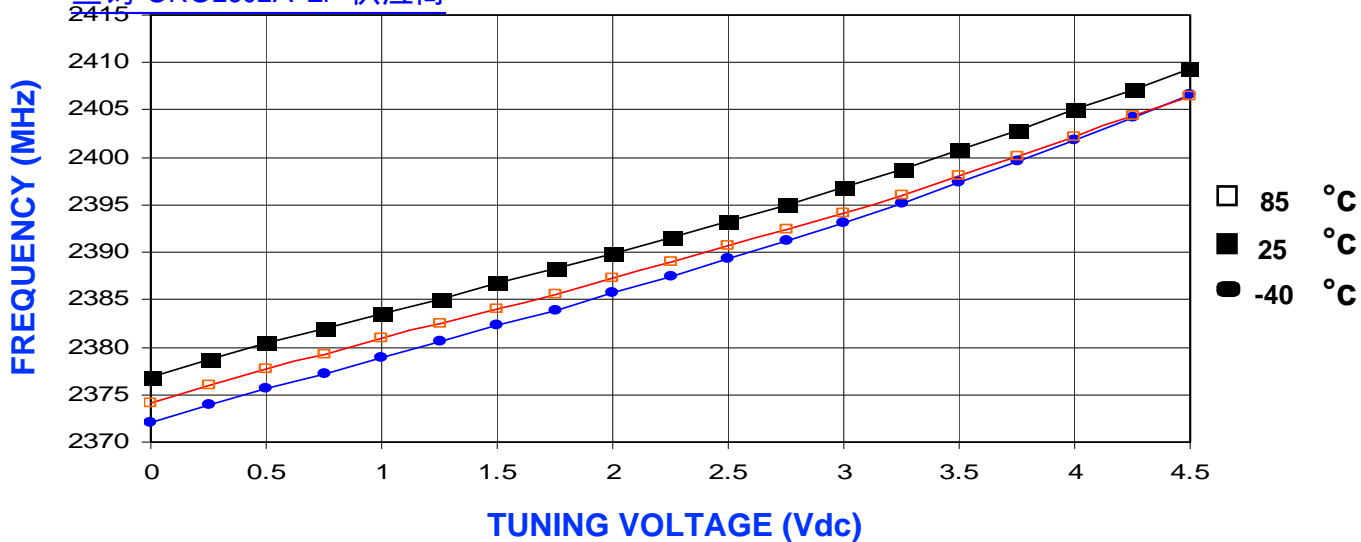

POWER CURVE, typ.

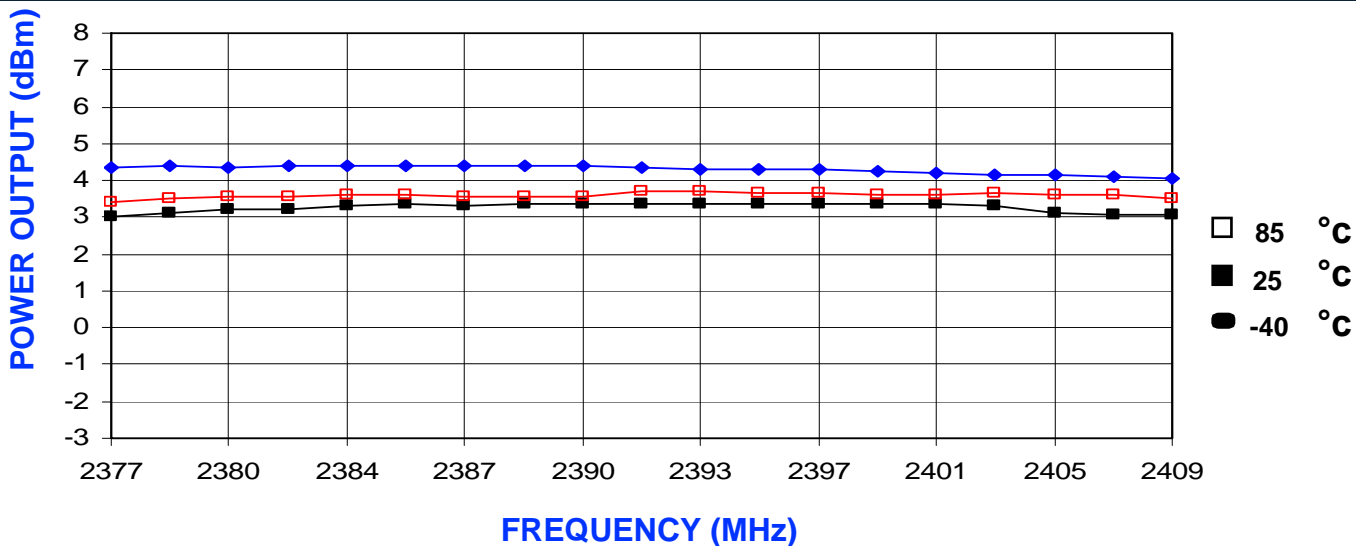

PHYSICAL DIMENSIONS

