

## FEATURES AND SPECIFICATIONS

[查询"38969-0006"供应商](#)



# 12.70mm (.500") Pitch TSE Single-Row Tri-Barrier Terminal Strip PC Tail Terminal Style

**38969**



Single-Row Tri-Barrier Terminal Strip

*Durable tri-barrier terminal strips are available with PC tails, our most popular terminal style, to accommodate a wide range of design requirements*

Barrier terminal strips provide a reliable and proven way to wire industrial applications. Barrier strips do not require any special tools, making them fast and easy to wire in the field.

This TSE single-row barrier strip is Molex's highest power terminal block, rated for 600V at 50.0A,

bringing maximum power directly to the PCB. The dual PC terminals into the PCB provide a robust connection.

These TSE single-row terminal blocks may be easily designed into applications currently utilizing the Beau 66 (38660-78XX) barrier strips.

### Features and Benefits

- Tri-barrier construction prevents short circuits and improves isolation, which allows other components to be placed close to the strip, conserving board space
- Clamp washer screw allows for the use of larger gauge wire for higher current and voltage applications
- Phillips and/or slotted combination head screws is easy to install; no special tools required
- Molded from thermoplastic which is less brittle than Phenolic resins

## SPECIFICATIONS

### Reference Information

Packaging: Tray  
UL File No.: E48521  
Flammability: UL 94V-0  
Designed In: Millimeters

### Electrical

Voltage: 600V  
Current: 50.0A  
Dielectric Withstanding Voltage: 2200V AC  
Insulation Resistance: 500 Megohms min.

### Mechanical

Recommended Tightening Torque:  
1.81Nm (16.0 in. lbs.)

### Physical

Housing: PBT  
Terminal: Brass (CuZn)  
Screw with Clamp Washer: Steel, M4  
Plating: Terminal Area — Tin (Sn)  
Screw — Zinc  
Wire Gauge: 8 to 20 AWG  
Operating Temperature: -40 to +120°C

## APPLICATIONS


[查询"38969-0006"供应商](#)



**12.70mm (.500") Pitch  
TSE Single-Row  
Tri-Barrier Terminal Strip  
PC Tail Terminal Style**

**38969**

- Traffic Controls
- HVAC
- Security Systems
- Professional Audio/Visual Equipment
- Data Acquisition
- Industrial Controls
- Factory Automation
- Power Supplies
- White Goods
- Telecommunication Equipment

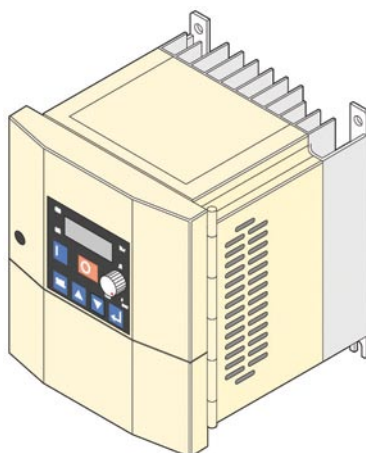

Motor Drive

## ORDERING INFORMATION

Order No.	Circuit Size	Terminal Style
38969-0002	2	PC Tail
38969-0003	3	
38969-0004	4	
38969-0005	5	
38969-0006	6	
38969-0007	7	
38969-0008	8	
38969-0009	9	
38969-0010	10	
38969-0011	11	
38969-0012	12	
38969-0013	13	
38969-0014	14	
38969-0015	15	

**Americas Headquarters**  
Lisle, Illinois 60532 U.S.A.  
1-800-78MOLEX  
[amerinfo@molex.com](mailto:amerinfo@molex.com)

**Asia Pacific North Headquarters**  
Yamato, Kanagawa, Japan  
81-46-265-2325  
[apninfo@molex.com](mailto:apninfo@molex.com)

**Asia Pacific South Headquarters**  
Jurong, Singapore  
65-6268-6868  
[fesinfo@molex.com](mailto:fesinfo@molex.com)

**European Headquarters**  
Munich, Germany  
49-89-413092-0  
[eurinfo@molex.com](mailto:eurinfo@molex.com)

**Corporate Headquarters**  
2222 Wellington Ct.  
Lisle, IL 60532 U.S.A.  
630-969-4550  
Fax: 630-969-1352

Visit our website at [www.molex.com/product/tse.html](http://www.molex.com/product/tse.html)