

查询"SMQ-C20"供应商

90° HYBRID SURFACE MOUNT MODEL: SMQ-C20

OPTIMIZED BANDWIDTH

52 - 88 MHz

FEATURES:

- ▶ Excellent Performance
- ▶ Small Size, Surface Mount
- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...



SPECIFICATIONS (Rev. C 02/05/08)

Frequency	52 - 88 MHz	
Insertion Loss (dB) *	Typ.	Max.
	0.3	0.6
Amplitude Unbalance	Typ.	Max.
	0.2	0.6
Phase Unbalance (Deg.)	Typ.	Max.
	1.0°	2.5°
Isolation (dB)	Typ.	Min.
	23	18
Power Rating	1 Watt (Max.)	
Impedance	50 Ohms (Nom.)	
VSWR	1.1:1 (Typ.)	
Operating Temperature Range	-40 to +85 °C	
* Insertion loss in excess of the theoretical 3 dB coupling.		

Package #	129
-----------	-----

Pin Configuration					
Input	Isolated*	+90° Output	0° Output	GND.	No Connection
5	6	1	2	7,8,9,10	3,4

* Terminate ISOLATED port in 50 Ohms EXTERNALLY.



[查询"SMQ-C20"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SMQ-C20

OPTIMIZED BANDWIDTH

52 - 88 MHz

Data @ 25°C

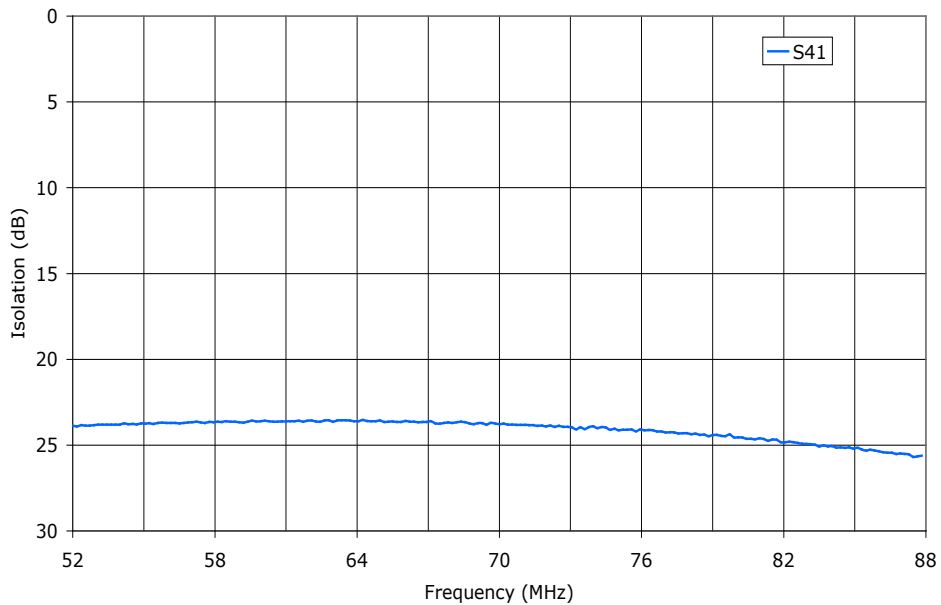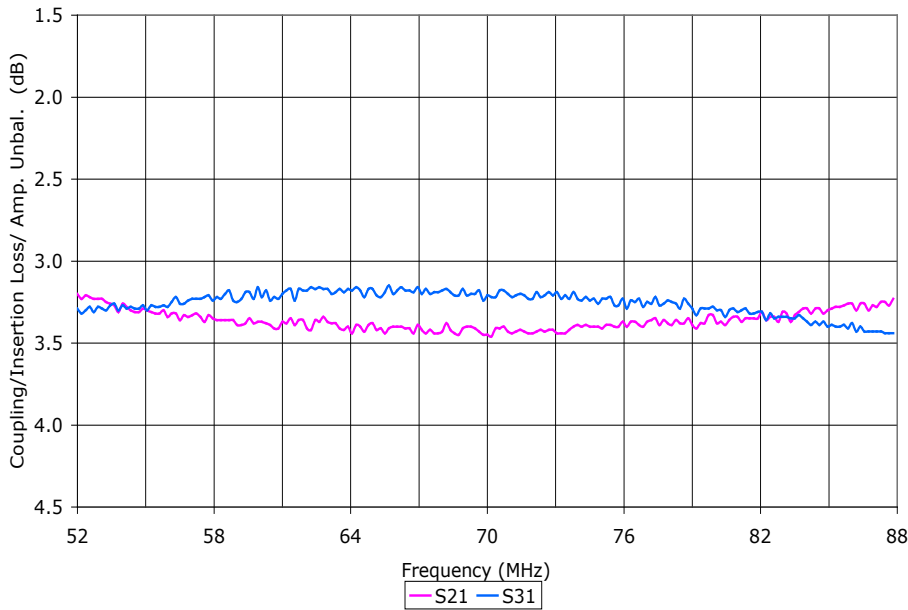

PERFORMANCE PLOTS



[查询"SMQ-C20"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SMQ-C20

OPTIMIZED BANDWIDTH

52 - 88 MHz

Data @ 25°C

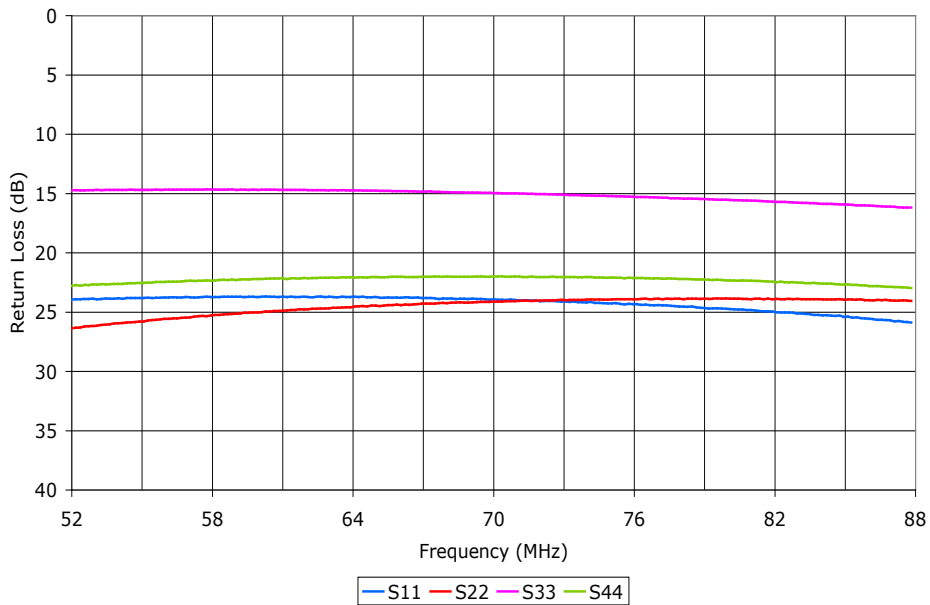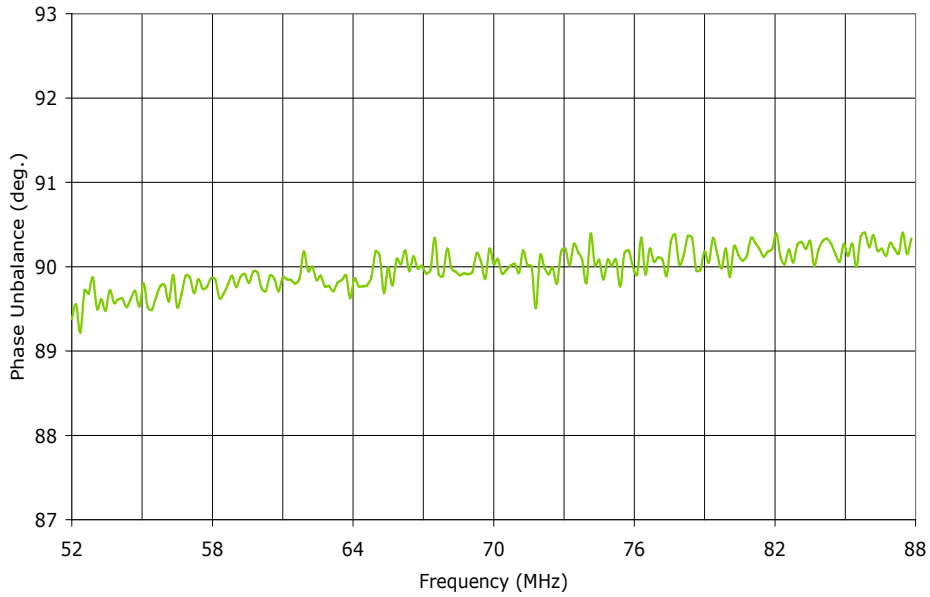

PERFORMANCE PLOTS


[查询"SMQ-C20"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SMQ-C20

OPTIMIZED BANDWIDTH

52 - 88 MHz

Data @ 25°C

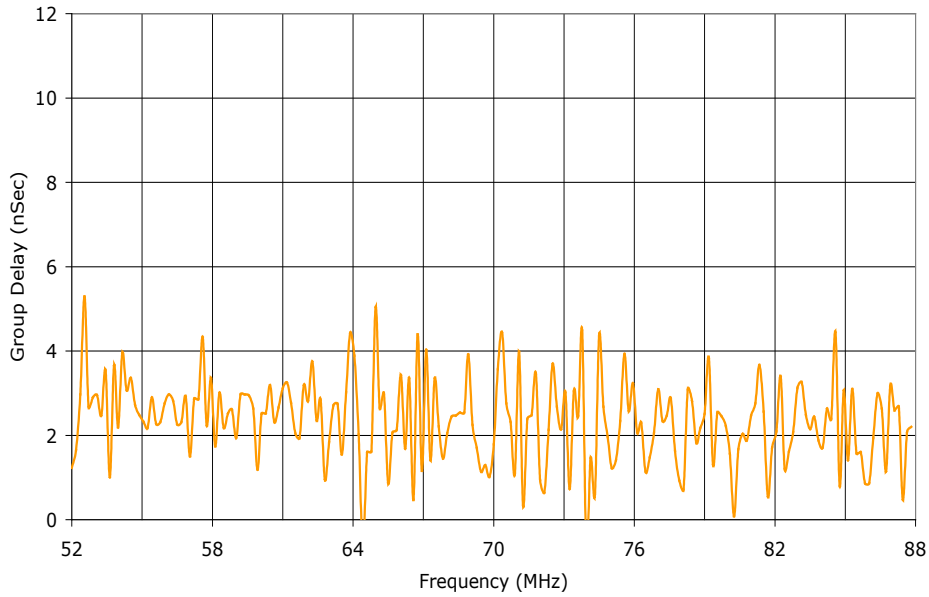

PERFORMANCE PLOTS