




查询"MBR30150CT"供应商

# MBR30150CT, MBRF30150CT

Dual Common-Cathode High-Voltage Schottky Barrier Rectifiers  
Reverse Voltage 150 Volts Forward Current 30.0 Amperes

## Features


- ◆ Guardring for overvoltage protection
- ◆ Low power loss, high efficiency
- ◆ Low forward voltage drop
- ◆ High frequency operation
- ◆ Solder Dip 260 °C, 40 seconds
- ◆ For use in high frequency inverters, free wheeling and polarity protection applications




## Mechanical Data

- ◆ Case: TO-220AB, ITO-220AB Epoxy meets UL-94V-0 Flammability rating
- ◆ Terminals: Matte Tin plated (E3 Suffix) leads, solderable per J-STD-002B and JESD22-B102D
- ◆ Mounting Torque: 10 in-lbs maximum
- ◆ Polarity: As marked
- ◆ Weight: 0.08 ounce, 2.24 grams

### TO-220AB

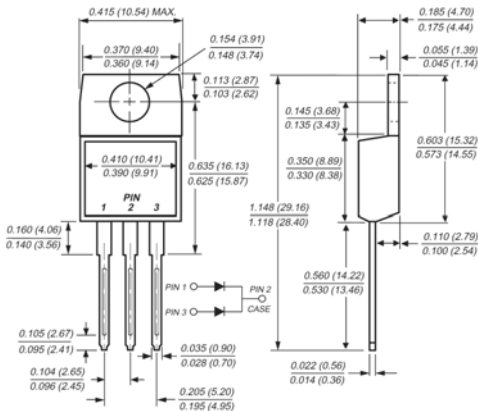

### ITO-220AB

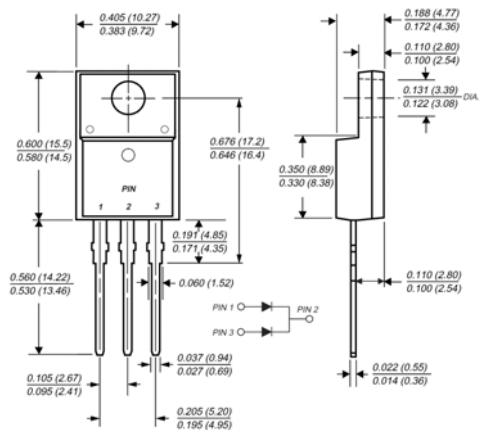

Dimensions in inches and (millimeters)

## 查询"MBR30150CT"供应商

### Maximum Ratings and Electrical Characteristics

( $T_C = 25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	MBR30150CT	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	150	Volts
Working peak reverse voltage	$V_{RWM}$	150	Volts
Maximum DC blocking voltage	$V_{DC}$	150	Volts
Maximum average forward rectified current (See Fig. 1)	Total device Per leg $I_{F(AV)}$	30 15	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	$I_{FSM}$	260	Amps
Peak repetitive reverse current per leg at $t_p = 2.0\mu\text{s}$ , 1KHz	$I_{RRM}$	1.0	Amp
Voltage rate of change (rated $V_R$ )	$dv/dt$	10,000	V/ $\mu\text{s}$
Maximum instantaneous forward voltage per leg (Note 4) at $I_F=15\text{A}$ , $T_C=25^\circ\text{C}$ at $I_F=15\text{A}$ , $T_C=125^\circ\text{C}$ at $I_F=30\text{A}$ , $T_C=25^\circ\text{C}$ at $I_F=30\text{A}$ , $T_C=125^\circ\text{C}$	$V_F$	0.90 0.75 0.99 0.86	Volt
Maximum reverse current per leg at working peak reverse voltage $T_J=25^\circ\text{C}$ $T_J=125^\circ\text{C}$	$I_R$	5.0 1.0	$\mu\text{A}$ mA
Typical thermal resistance per leg	$R_{\theta JC}$	MBR 1.7 / MBRF 4.0	$^\circ\text{C/W}$
RMS Isolation voltage (MBRF type only) from terminals to heatsink with $t = 1.0$ second, $RH \leq 30\%$	$V_{ISOL}$	4500 (Note 1) 3500 (Note 2) 1500 (Note 3)	Volts
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$

- Notes:**
1. Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
  2. Clip mounting (on case), where leads do overlap heatsink
  3. Screw mounting with 4-40 screw, where washer diameter is < 4.9 mm (0.19")
  4. Pulse test: 300 $\mu\text{s}$  pulse width, 1% duty cycle

## RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

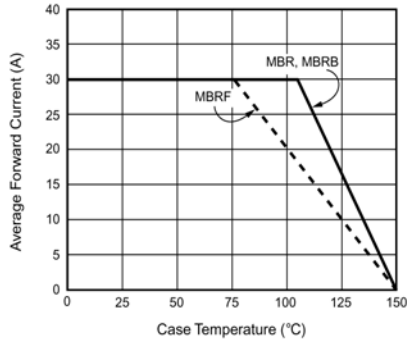


Figure 1. Forward Derating Curve (Total)

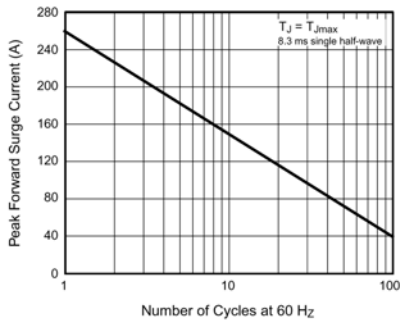


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

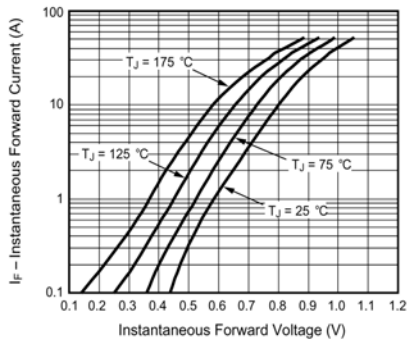


Figure 3. Typical Instantaneous Forward Characteristics Per Leg

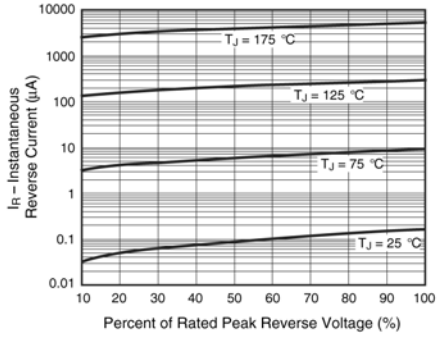


Figure 4. Typical Reverse Characteristics Per Leg

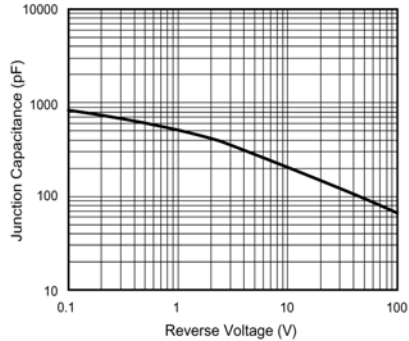


Figure 5. Typical Junction Capacitance Per Leg

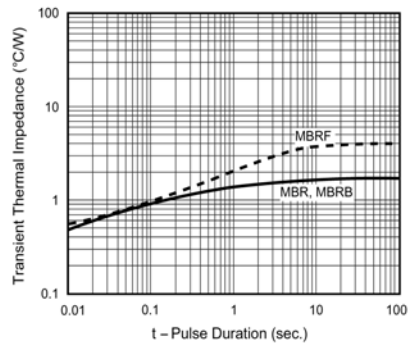


Figure 6. Typical Transient Thermal Impedance Per Leg