

INTRODUCTION

[查询"501628-5191"供应商](#)

Molex's new 0.30mm Pitch FPC connector with cable tab feature provides superior cable retention and alignment.

The connector includes a notch in the solder nail that accepts cable tabs (or "ears"), which provide extremely strong protection from the cable being pulled out.

The connector also includes a low insertion force (LIF) terminal design. This feature, along with the cable tabs, keeps the cable firmly in place during insertion and allows operators to use both hands to more easily engage the actuator.

Other features include friction locks on both ends of the actuator that provide strong upward force cable retention, while keeping the actuator closed during shipping in embossed tape. This new version is available in various circuit sizes from 21-51.




0.30mm (.012") Pitch SMT FPC Connector, 0.90mm (.035") Height, Narrow Width, Cable-Tab Type

Series 501628

Specifications:

- Current: 0.2A
- Voltage: 50V
- Contact Plating: Gold
- Underplating: Nickel
- Contact Resistance: 40 milliohms max.
- Insulation Resistance: 50 Megohms min.
- Dielectric Withstanding Voltage: 250V AC
- Durability: 10 cycles
- Flammability: UL 94V-0
- Packaging: Embossed Tape
- Operating Temperature: -25 to +85°C

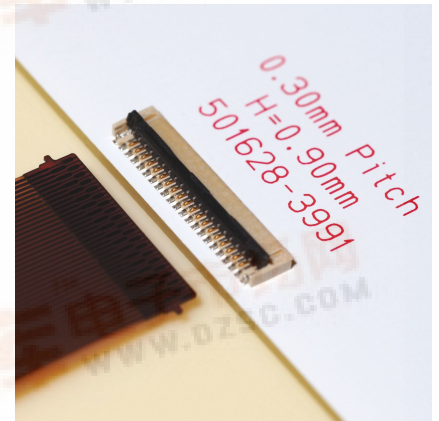

Features

- FPC cable tabs
- LIF FPC cable-hold feature
- 3.10mm (.122") width
- Friction actuator lock
- Nickel barrier plating


Benefits

- Cable retention and alignment
- Additional cable retention and alignment
- Space savings
- Prevents actuator from opening
- Provides protection against flux wicking

Cable-Tab Feature


Provides cable retention and alignment

Tab placement assures cable is properly aligned for secure electrical contact




FPC cable tab fits into notch of solder nail and prevents cable from being pulled out.

0.31mm Wipe Length



Actuator Lock Mechanism


A strong friction lock on both ends of the actuator locks it firmly in place and provides a "click" sound when engaged. Actuator stays shut inside embossed tape packaging.

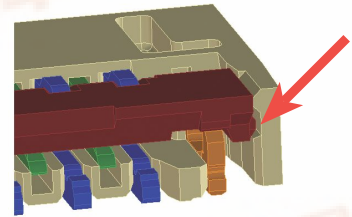

MARKETS AND APPLICATIONS

- Mobile phones
- PDAs
- Other compact, mobile devices



ORDERING INFORMATION[查询"501628-5191"供应商](#)**0.30mm (.012") Pitch
SMT FPC Connector,
0.90mm (.035") Height,
Narrow Width,
Cable-Tab Type****Series 501628**

Order Number	Circuits	Height	Width
501628-2191	21	0.90mm (.035")	3.10mm (.122")
501628-2791	27		
501628-3191	31		
501628-3391	33		
501628-3591	35		
501628-3991	39		
501628-4591	45		
501628-5191	51		

molex[®]
one company › a world of innovation

Americas Headquarters
2222 Wellington Ct,
Lisle, Illinois 60532 USA
Tel: 1-800-78MOLEX
amerinfo@molex.com

Asia Pacific North Headquarters
Yamato, Kanagawa, Japan
Tel: 81-46-265-2325
apninfo@molex.com

Asia Pacific South Headquarters
Jurong, Singapore
Tel: 65-6-268-6868
apsinfo@molex.com

European Headquarters
Munich, Germany
Tel: 49-89-413092-0
euroinfo@molex.com

Corporate Headquarters
2222 Wellington Ct,
Lisle, Illinois 60532 USA
Tel: 630-969-4550

Visit our website at www.molex.com