

# Surface Mount Directional Coupler

## ADC-20-12+ ADC-20-12

50Ω 100 to 1200 MHz


### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C


### Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
50Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

### Outline Drawing

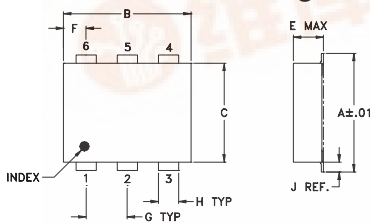

### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±0.02

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L		wt	
.030	.026	.065	.300		grams	
0.76	0.66	1.65	7.62		0.20	

### Demo Board MCL P/N: TB-05 Suggested PCB Layout (PL-095)

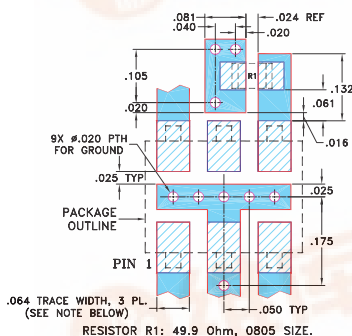

RESISTOR R1: 49.9 Ohm, 0805 SIZE.  
NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- useable to 1500 MHz
- low mainline loss, 0.5 dB typ.
- high directivity, 26 dB typ.
- aqueous washable
- protected by U.S Patents 6,133,525 & 6,140,887

### Applications

- cable tv



CASE STYLE: CD542  
PRICE:\$6.95 ea. QTY (10-49)

+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




### Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W	
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		Typ.	L Max.
f <sub>L</sub> -f <sub>U</sub>									
100-1200	20±0.75	±0.7	0.5	1.1	26	13	1.17	1.0	1.0


1. Mainline loss includes theoretical power loss at coupled port.

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
100.00	0.34	19.94	22.33	29.24	25.01	30.72
250.00	0.37	20.14	22.91	26.99	24.13	28.60
350.00	0.39	20.24	23.45	25.38	22.81	26.88
500.00	0.46	20.56	26.44	23.21	21.05	24.55
600.00	0.50	20.50	27.16	22.03	19.94	23.24
700.00	0.53	20.55	27.78	21.02	18.96	22.06
800.00	0.56	20.58	27.00	20.17	18.09	21.12
900.00	0.61	20.61	25.40	19.23	17.25	20.16
1100.00	0.69	20.61	22.34	17.44	15.64	18.19
1200.00	0.76	20.63	20.72	16.56	14.90	17.35

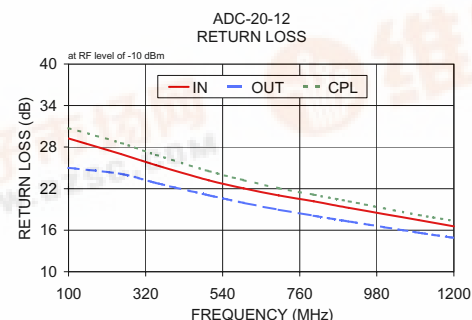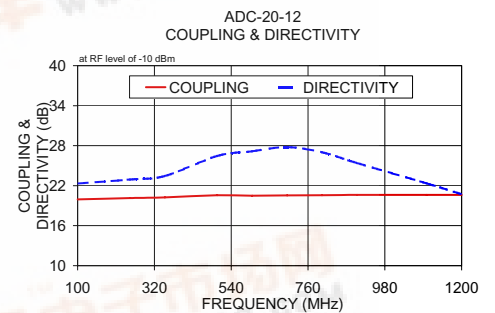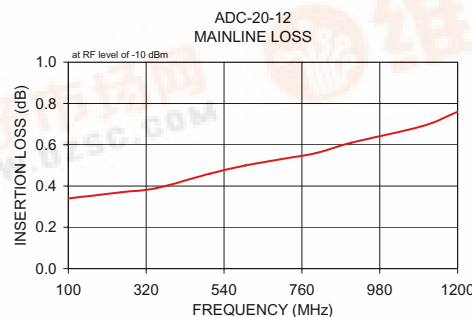

### Electrical Schematic

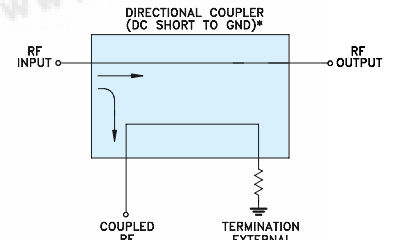

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

REV. D  
M119986  
ED-7776/1  
ADC-20-12  
WZ/TD/CP/AM  
081111



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS