

International IR Rectifier

MBR16..PbF Series

SCHOTTKY RECTIFIER

16 Amp

$I_{F(AV)} = 16\text{Amp}$
 $V_R = 35\text{-}45\text{V}$

Major Ratings and Characteristics

| Characteristics | Values | Units |
|--|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform | 16 | A |
| V_{RRM} | 35-45 | V |
| I_{FSM} @ $t_p = 5 \mu\text{s}$ sine | 1800 | A |
| V_F @ 16Apk, $T_J = 125^\circ\text{C}$ | 0.57 | V |
| T_J | -65 to 150 | $^\circ\text{C}$ |

Description/ Features

The MBR16..PbF Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.


- 150°C T_J operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

Case Styles

MBR16..PbF



TO-220AC



MBR16..PbF Series

Bulletin PD-20865 rev. A 04/06



Voltage Ratings

| Part number | MBR1635PbF | MBR1645PbF |
|---|------------|------------|
| V_R Max. DC Reverse Voltage (V) | 35 | 45 |
| V_{RWM} Max. Working Peak Reverse Voltage (V) | | |

Absolute Maximum Ratings

| Parameters | MBR16.. | Units | Conditions |
|---|---------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current | 16 | A | @ $T_C = 134^\circ\text{C}$ (Rated V_R) |
| I_{FSM} Non-Repetitive Peak Surge Current | 1800 | A | 5 μs Sine or 3 μs Rect. pulse Following any rated load condition and with rated V_{RRM} applied |
| | 150 | | Surge applied at rated load condition halfwave single phase 60Hz |
| E_{AS} Non-Repetitive Avalanche Energy | 24 | mJ | $T_J = 25^\circ\text{C}$, $I_{AS} = 3.6$ Amps, $L = 3.7$ mH |
| I_{AR} Repetitive Avalanche Current | 3.6 | A | Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical |

Electrical Specifications

| Parameters | MBR16.. | Units | Conditions |
|--|---------|------------------|---|
| V_{FM} Max. Forward Voltage Drop (1) | 0.63 | V | @ 16A $T_J = 25^\circ\text{C}$ |
| | 0.57 | V | @ 16A $T_J = 125^\circ\text{C}$ |
| I_{RM} Max. Instantaneous Reverse Current (1) | 0.2 | mA | $T_J = 25^\circ\text{C}$ |
| | 40 | mA | $T_J = 125^\circ\text{C}$ Rated DC voltage |
| C_T Max. Junction Capacitance | 1400 | pF | $V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C |
| L_S Typical Series Inductance | 8.0 | nH | Measured from top of terminal to mounting plane |
| dv/dt Max. Voltage Rate of Change (Rated V_R) | 10000 | V/ μs | |

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

| Parameters | MBR16.. | Units | Conditions |
|---|--------------|---------------------------|--------------------------------------|
| T_J Max. Junction Temperature Range | -65 to 150 | $^\circ\text{C}$ | |
| T_{stg} Max. Storage Temperature Range | -65 to 175 | $^\circ\text{C}$ | |
| R_{thJC} Max. Thermal Resistance Junction to Case | 1.50 | $^\circ\text{C}/\text{W}$ | DC operation |
| R_{thCS} Typical Thermal Resistance, Case to Heatsink | 0.50 | $^\circ\text{C}/\text{W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight | 2 (0.07) | g (oz.) | |
| T Mounting Torque | Min. 6 (5) | Kg-cm (lbf-in) | |
| | Max. 12 (10) | | |
| Case Style | TO-220AC | JEDEC | |
| Marking Device | MBR1645 | | |

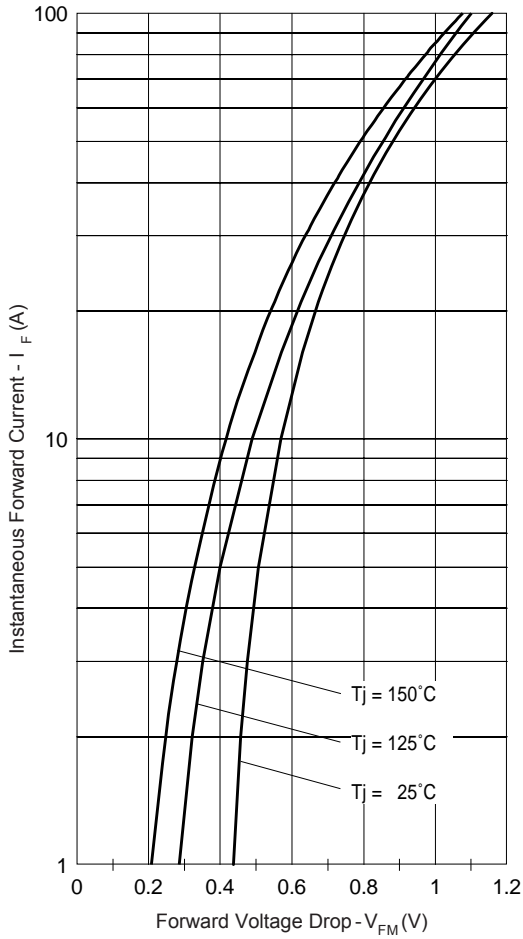


Fig. 1 - Maximum Forward Voltage Drop Characteristics

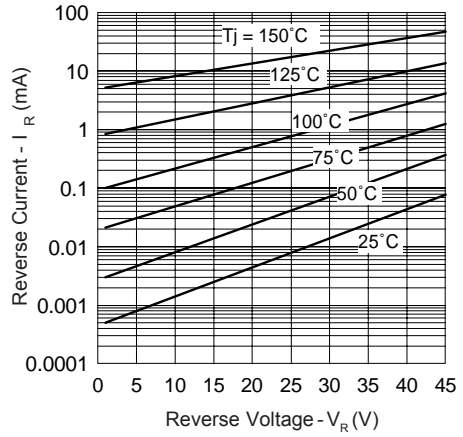


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

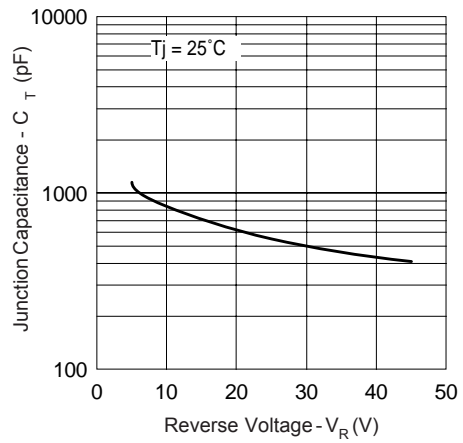


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

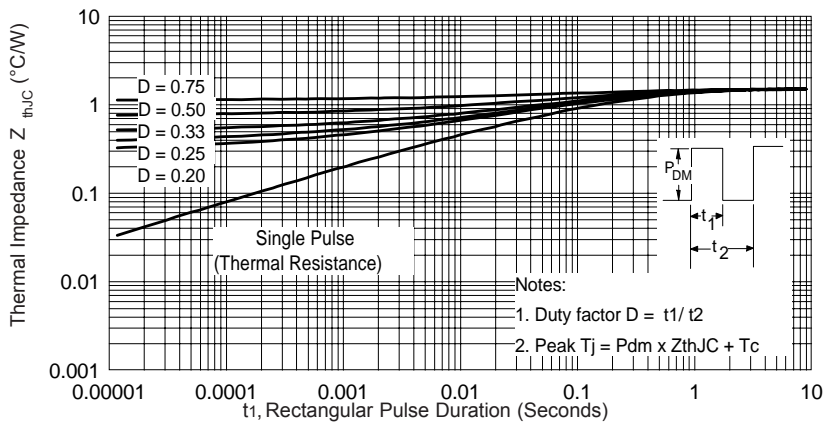


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

MBR16..PbF Series

Bulletin PD-20865 rev. A 04/06

International
IR Rectifier

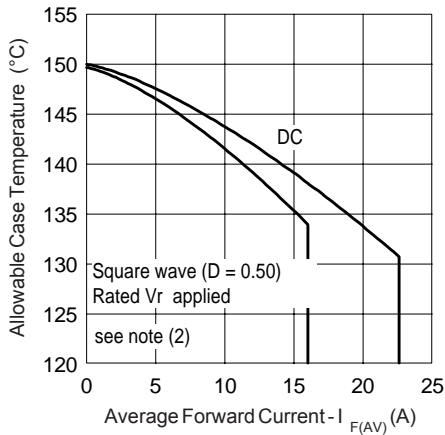


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

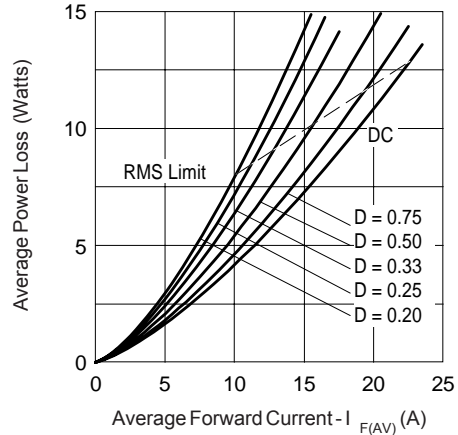


Fig. 6 - Forward Power Loss Characteristics

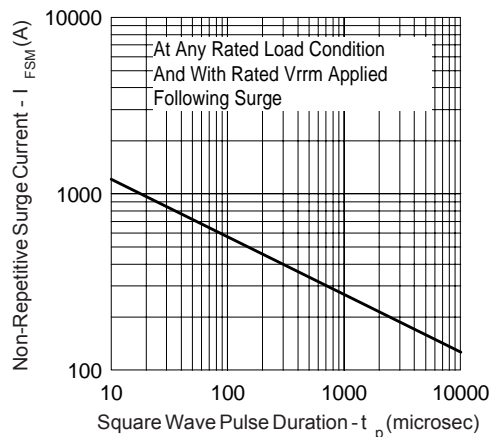


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

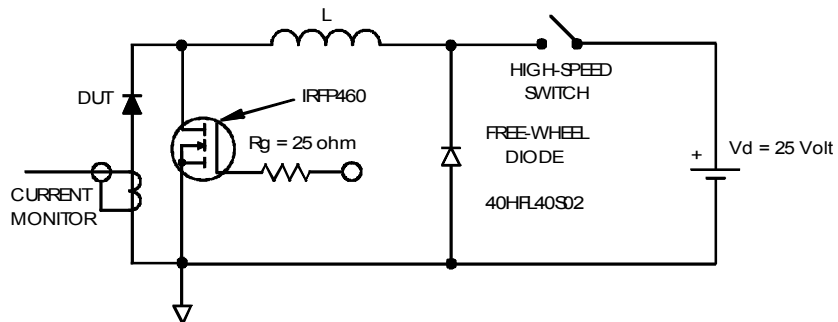



Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$

Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_{R1} (1 - D)$; $I_{R1} @ V_{R1}$ = rated V_{R1} applied

Outline Table

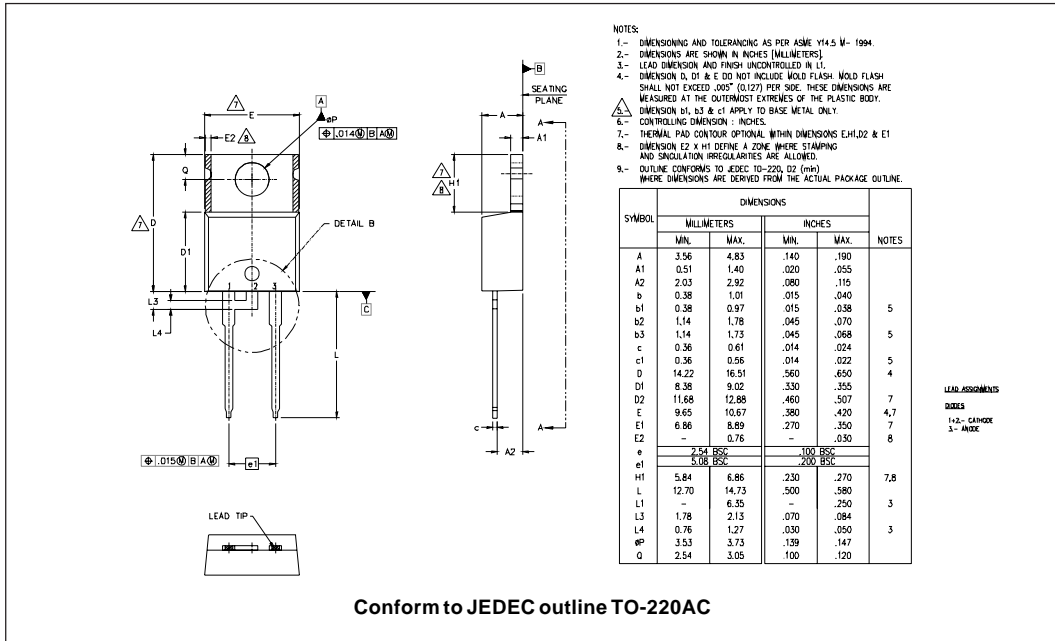

Part Marking Information

