

## INTRODUCTION


[查询"49326"供应商](#)

This new 0.30mm pitch FPC connector from Molex offers compact, high-density features and secure cable retention. Corner ledges on the connector ensure that the actuator will not become disengaged if the cable is pulled upward.

Available in 51 circuits, it is ideal for mobile LED applications and other high density packaging. This miniature version also features Molex's unique Easy-On™ actuator that rotates back 135% degrees to provide easy cable insertion. A staggered footprint pattern provides a high density 0.30mm pitch PCB layout that is compatible with some competitive versions.



**0.30mm (.012") Pitch  
FPC Connector  
1.20mm (.047") Height  
49063**


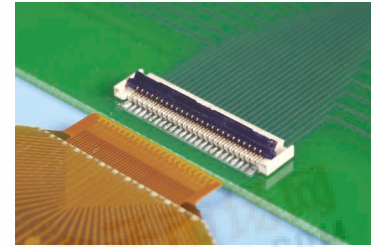


### Specifications:

- Voltage: 50V
- Current: 0.35A
- Withstanding Voltage: AC 250V
- Contact Resistance: 60m $\Omega$  max.
- Insulation Resistance: 50M $\Omega$  min.
- Durability: 10 cycles
- Housing: LCP (Glass-filled), UL 94V-0
- Actuator: PPS
- Contact: Copper Alloy
- Plating: Terminal - Gold over Nickel
- Operating Temperature: -40°C ~ +85°C

## FEATURES AND BENEFITS

- Compact design for space savings
- Corner ledges prevent actuator from lifting up even if cable is pulled upwards
- Easy-On™ actuator rotates 135% for easy cable insertion
- Actuator and contact design provide secure cable retention
- Staggered pitch PCB pattern enables high-density packaging
- Accepts 0.12mm thick FPC

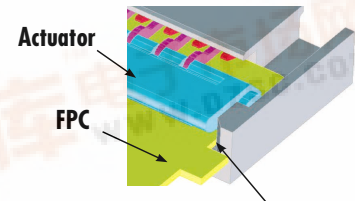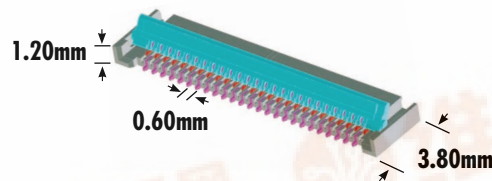

Corner ledges protect actuator from disengaging if cable is pulled upwards

## SELECTION MATRIX

	Description	Order No.	Circuits			Packaging
	Right Angle, SMT Easy-On™ Bottom Contact Height = 1.20mm (.047") FPC Thickness = 0.12mm	49063-5167	51	Gold	LCP (Glass-filled), UL 94V-0, Copper Alloy	Embossed Tape


## APPLICATIONS

- Mobile Phone
- LED display module
- DSC
- DVC
- PDA
- PHS
- Voice Recorder
- GPS
- Portable game machine
- Any low-profile device





# 0.50mm (.020") Pitch FPC Connector 2.00mm (.079") Height 49022/49326

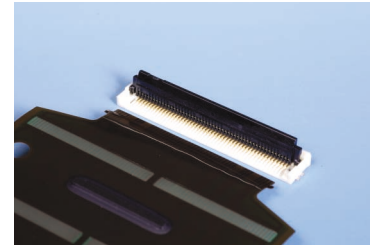

## INTRODUCTION

[查询"49326"供应商](#)

This new connector has two versions: one with molded ramp guides to accommodate notches on the FPC cable and provide additional mating guidance and retention; and a standard version without the mold guides that accepts various FPC cable.


The main application for this new high density FPC connector is PDP flat panel displays and Low Voltage Differential Signaling (LVDS) TV applications. However, its robust features make it ideal for many high-density FPC applications

### Specifications:


- Voltage: 50V
- Current: 0.5A
- Contact Resistance: 40m $\Omega$  max.
- Dielectric Withstanding Voltage: AC 250V
- Insulation Resistance: 50m $\Omega$  min.
- Durability: 10 cycles
- Housing: Polyamide (Glass-filled), UL 94V-0
- Actuator: PPS
- Contact: Phosphor Bronze
- Plating: Terminal - Gold; Solder Tab - Tin
- Operating Temperature: -40°C ~ +85°C

## FEATURES AND BENEFITS

- 49326 has corner mold guides ramps to accept cable tabs and provide additional mating guidance and retention
- Robust design provides protection to housing and actuator
- Footprint compatible with some competitive versions
- Easy-On™ actuator rotates back 100% to provide easy cable insertion and secure cable retention on both 49022 and 49326



49022 series without FPC tab guides

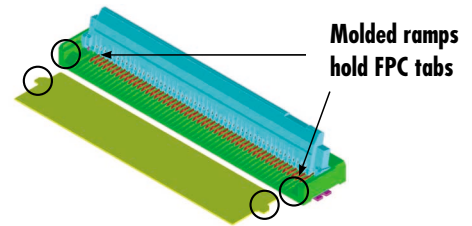

49326 series with FPC tab guides

## SELECTION MATRIX

	Description	With Ramp	Order No.	Circuits	Plating	Material (Housing/Terminal)	Packaging
	Right Angle, SMT Easy-On™ Bottom Contact Height = 2.00mm (.079") FPC Thickness = 0.12mm	No	49022-5067	50	Gold	Polyamide (Glass-filled), UL 94V-0, Phosphor Bronze	Embossed Tape
		Yes	49326-5017				

## APPLICATIONS



- Plasma Display Panels (PDP)
- Liquid Crystal Display (LCD) Panels
- HDTV
- TV Tuners
- Power Units
- LCD / PDP Panel Switches
- PDP Scan Boards
- Office Automation
- Servers, Routers
- DVD
- Plain Paper Copier

**Americas Headquarters**  
2222 Wellington Ct,  
Lisle, Illinois 60532 U.S.A  
Tel: 1-800-78MOLEX  
amerinfo@molex.com

**Far East North Headquarters**  
Yamato, Kanagawa, Japan  
Tel: 81-462-65-2324  
feninfo@molex.com

**Far East South Headquarters**  
Jurong, Singapore  
Tel: 65-6-268-6868  
fesinfo@molex.com

**European Headquarters**  
Munich, Germany  
Tel: 49-89-413092-0  
eurinfo@molex.com

**Corporate Headquarters**  
2222 Wellington Ct,  
Lisle, Illinois 60532 U.S.A  
Tel: 630-969-4550