


**KYZ25A05 ... KYZ25A6, KYZ25K05 ... KYZ25K6**

**Silicon-Press-Fit-Diodes – High Temperature Diodes**  
**Silizium-Einpress-Dioden – Hochtemperatur-Dioden**

Version 2006-04-20

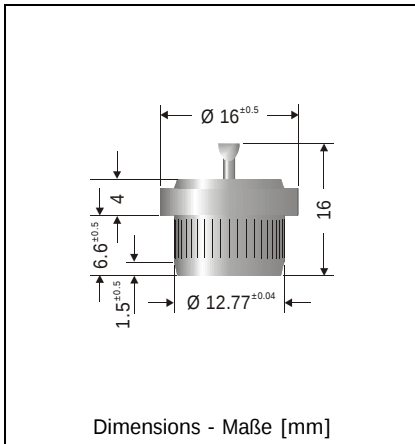

Nominal Current 25 A  
Nennstrom

Repetitive peak reverse voltage 50 ... 600 V  
Periodische Spitzensperrspannung

Metal press-fit case with glass seal  
Metall-Einpressgehäuse mit Glas-Durchführung

Weight approx. – Gewicht ca. 10 g

Compound has classification UL94V-0  
Vergussmasse nach UL94V-0 klassifiziert

Standard packaging: bulk  
Standard Lieferform: lose im Karton



**Maximum ratings**

**Grenzwerte**

| Type / Typ<br>Wire to / Draht an |          | Repetive peak reverse voltage<br>Periodische Spitzensperrspannung<br>$V_{RRM}$ [V] | Surge peak reverse voltage<br>Stoßspitzensperrspannung<br>$V_{RSM}$ [V] |
|----------------------------------|----------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Anode                            | Cathode  |                                                                                    |                                                                         |
| KYZ25A05                         | KYZ25K05 | 50                                                                                 | 60                                                                      |
| KYZ25A1                          | KYZ25K1  | 100                                                                                | 120                                                                     |
| KYZ25A2                          | KYZ25K2  | 200                                                                                | 240                                                                     |
| KYZ25A3                          | KYZ25K3  | 300                                                                                | 360                                                                     |
| KYZ25A4                          | KYZ25K4  | 400                                                                                | 480                                                                     |
| KYZ25A6                          | KYZ25K6  | 600                                                                                | 700                                                                     |

|                                                                                                      |                           |                |                              |
|------------------------------------------------------------------------------------------------------|---------------------------|----------------|------------------------------|
| Max. average forward rectified current, R-load<br>Dauergrenzstrom in Einwegschtung mit R-Last        | $T_C = 150^\circ\text{C}$ | $I_{FAV}$      | 25 A                         |
| Repetitive peak forward current<br>Periodischer Spitzenstrom                                         | $f > 15\text{ Hz}$        | $I_{FRM}$      | 90 A <sup>1)</sup>           |
| Peak forward surge current, 50/60 Hz half sine-wave<br>Stoßstrom für eine 50/60 Hz Sinus-Halbwell    | $T_A = 25^\circ\text{C}$  | $I_{FSM}$      | 270/300 A                    |
| Rating for fusing, $t < 10\text{ ms}$<br>Grenzlastintegral, $t < 10\text{ ms}$                       | $T_A = 25^\circ\text{C}$  | $i^2t$         | 375 A <sup>2</sup> s         |
| Operating junction temperature – Sperrschichttemperatur<br>Storage temperature – Lagerungstemperatur |                           | $T_j$<br>$T_s$ | -50...+175°C<br>-50...+175°C |

1 Max. case temperature  $T_C = 150^\circ\text{C}$  – Max. Gehäusetemperatur  $T_C = 150^\circ\text{C}$

## Characteristics

## Kennwerte

|                                                                              |                                              |           |                            |
|------------------------------------------------------------------------------|----------------------------------------------|-----------|----------------------------|
| Forward Voltage<br>Durchlass-Spannung                                        | $T_j = 25^\circ\text{C}$ $I_F = 25\text{ A}$ | $V_F$     | $< 1.1\text{ V}$           |
| Leakage Current<br>Sperrstrom                                                | $T_j = 25^\circ\text{C}$ $V_R = V_{RRM}$     | $I_R$     | $< 100\text{ }\mu\text{A}$ |
| Thermal Resistance Junction – Case<br>Wärmewiderstand Sperrschicht – Gehäuse |                                              | $R_{thc}$ | $< 1\text{ K/W}$           |

