


2.0mm DUAL ROW SOCKET P.C.B.MOUNT

200132FS Series (4.5mm PLASTIC HEIGHT) OR P.C.B.MOUNT TYPE

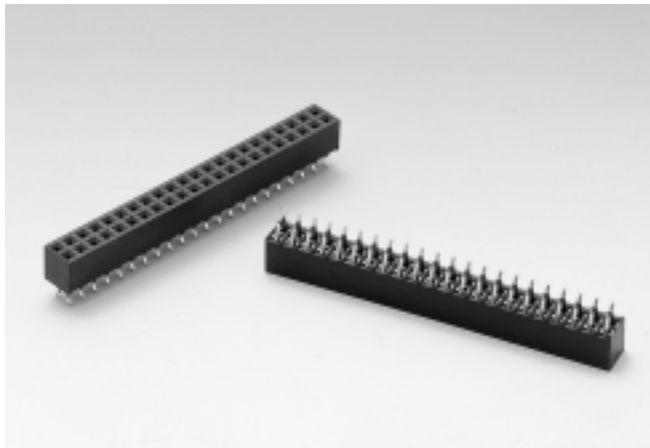


200132FS Series

Mates With SUYIN 200109, 200112, 200114, 200115, 200117, 200121, 200194 Series

Specifications:

- 8-80 Circuits
- Insulator Material : Black High Temp. Plastic
- Max Processing Temp.: -40°C to +105°C
- Terminal Material : Pho. bronze
- Plating : Contact-Selective Gold Plated or Full Gold Plated
- Max. Current Rating : 1.5A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 Seconds)

2.0
mm

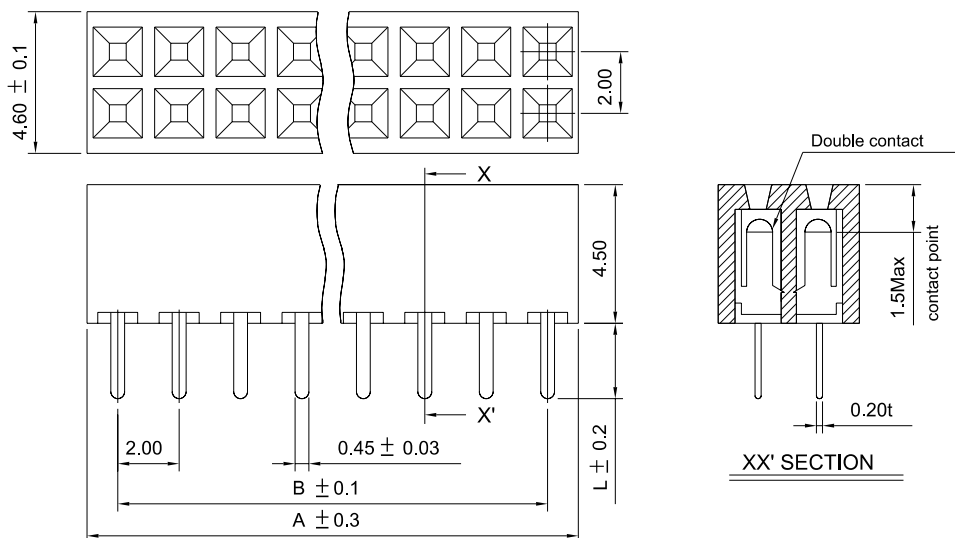

Order Information

200132FS□□□□00ZU
1 2 3 4 5

1. Pin Length.

SUYIN P/NO.	DIM. L
200132FS□□□□00ZU	2.45
200132FS□□□□27ZU	1.20
200132FS□□□□33ZU	1.50

1. 'S' : Straight DIP Type

2. No. of Pins

3. Plating

4. Color 'Z' : Black

5. Package

'U' : Tube Package Without CAP

Reference Page 11

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200132FS008□□00ZU	8.0	6.0	200132FS040□□00ZU	40.0	38.0
200132FS010□□00ZU	10.0	8.0	200132FS044□□00ZU	44.0	42.0
200132FS012□□00ZU	12.0	10.0	200132FS046□□00ZU	46.0	44.0
200132FS014□□00ZU	14.0	12.0	200132FS050□□00ZU	50.0	48.0
200132FS016□□00ZU	16.0	14.0	200132FS052□□00ZU	52.0	50.0
200132FS018□□00ZU	18.0	16.0	200132FS056□□00ZU	56.0	54.0
200132FS020□□00ZU	20.0	18.0	200132FS060□□00ZU	60.0	58.0
200132FS024□□00ZU	24.0	22.0	200132FS062□□00ZU	62.30	60.0
200132FS026□□00ZU	26.0	24.0	200132FS064□□00ZU	64.0	62.0
200132FS030□□00ZU	30.0	28.0	200132FS068□□00ZU	68.0	66.0
200132FS034□□00ZU	34.0	32.0	200132FS070□□00ZU	70.0	68.0
200132FS036□□00ZU	36.0	34.0	200132FS080□□00ZU	80.0	78.0

Recommended P.C.B Layout

