


KBPC1005 THRU KBPC110

[查询"KBPC110"供应商](#)

3 A Single-phase Silicon Bridge Rectifiers

Features

- Low forward voltage drop
- Small size: simple installation
- Tinned copper leads
- Mounting Position: Any

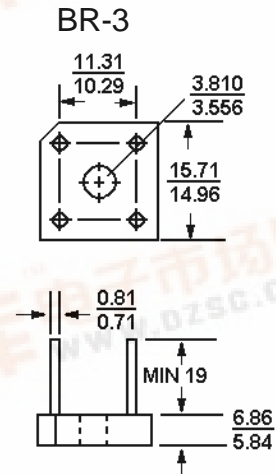

Dimensions in mm

Absolute Maximum Ratings and Characteristics

Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load, For capacitive load, derate current by 20%.

Parameter	Symbols	KBPC 1005	KBPC 101	KBPC 102	KBPC 104	KBPC 106	KBPC 108	KBPC 110	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum Average Forward Rectified Current $T_C = 50\text{ }^\circ\text{C}$ $T_C = 100\text{ }^\circ\text{C}$ $T_A = 50\text{ }^\circ\text{C}$	$I_{F(AV)}$	3				2			A
Peak Forward Surge Current 8.3 ms Single half sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50							A
Maximum Instantaneous Forward Voltage 1.5 A	V_F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A = 25\text{ }^\circ\text{C}$ $T_A = 100\text{ }^\circ\text{C}$	I_R	10				1			μA mA
Operating temperature Range	T_j	- 55 to + 125							$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150							$^\circ\text{C}$

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



FIG.1-MAXIMUM FORWARD SURGE CURRENT

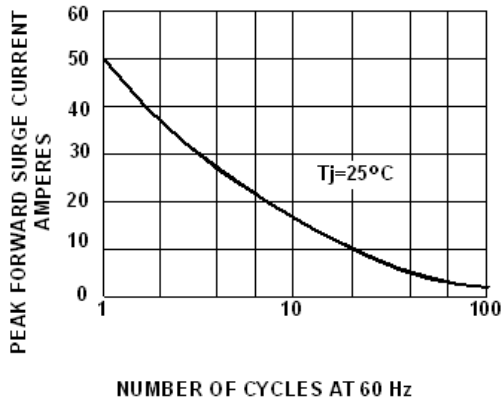


FIG.2-DE-RATING CURVE FOR OUTPUT RECTIFIED CURRENT

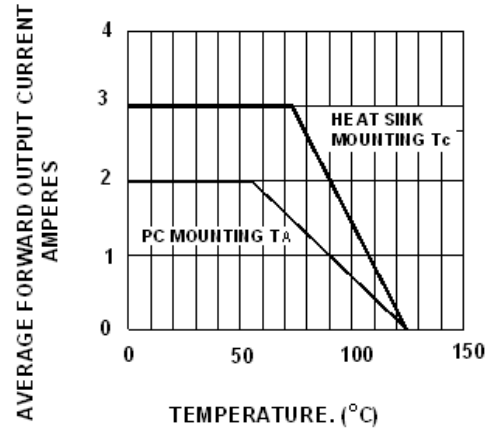


FIG.3-TYPICAL FORWARD CHARACTERISTICS



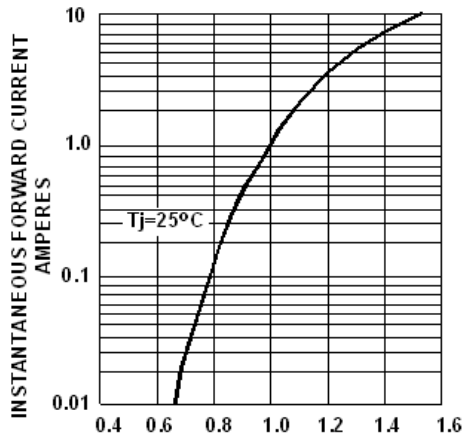


FIG.4-TYPICAL REVERSE CHARACTERISTICS

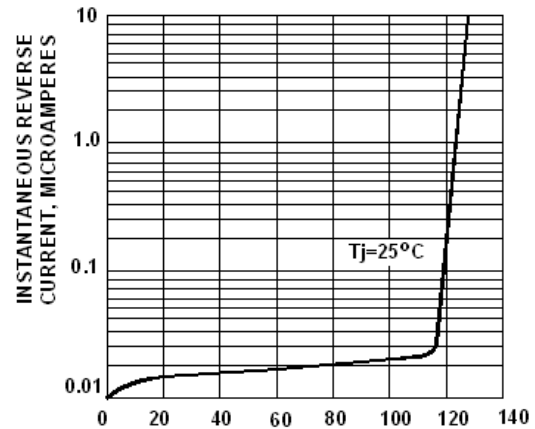

INSTANTANEOUS FORWARD VOLTAGE,VOLTS

PERCENT OF RATED PEAK REVERSE VOLTAGE



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

