查询"803"供应商

Littelfuse®

Holder / No. 803 01 for 500 Volts

Panel Mount for 6.3x32 mm Fuses

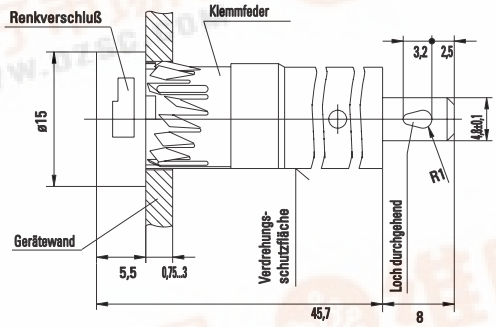



Panel Mounting Hole

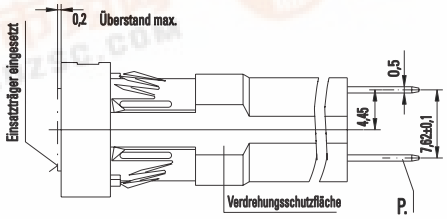

Cap / No. 816 for 500 Volt

For 6.3x32 mm Fuses

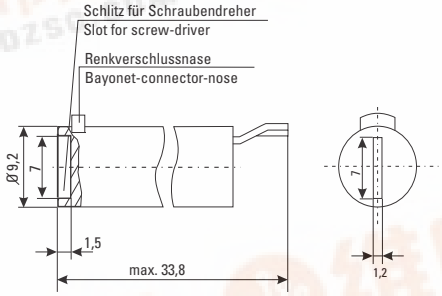

RoHS

Order Information

Qty.	Order-Number	Series			Packaging
			0000	00	0

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

Specifications

Packaging
0 bulk (100 pcs.)

Standard
IEC 60127-6
UL 512
CSA C22.2

Approvals

Mounting
Pluggable with clamping spring in 12.7mm diameter D-hole (panel of 0.75mm - 3 mm)

Terminals
Solderable or 4.8mm quick connect-fits 0.5mm tab

Protection Class & Category
IP 40 (IEC 60529)
PC2 (IEC 60127-6)

Materials

Holder / Cap:	Thermoplastic (Polyamide PA 6.6), black, UL94 V-0
Clamp spring:	non-corrosion metal, untreated
Metal Parts:	Copper alloy, corrosion protected
Terminals:	solderable tinned

Electrical Data (23°C)

Rated Voltage:	500 V
Rated Current:	10 A (VDE/SEMKO)
	16 A (UL/CSA)
Rated Power :	4 W (VDE/SEMKO)

Operating Temperature
-25°C to +70°C (consider de-rating)

Climatic Test
-25 °C/+70 °C/21 days (IEC 60068-2-1...3)

Stock Conditions
+10°C to +60°C
relative humidity ≤ 75% yearly average, without dew, maximum value for 30 days - 95%

Contact Resistance
≤ 5mΩ

Dielectric Strength
> 2 kV

Impulse Voltage
4 kV with 1.2 / 50 µs

Insulation Resistance
> 10^3 MΩ (500 VDC, 1 min.)

Solderability
235°C, 2 sec. (soldering bath) (IEC 60068-2-20)
350 °C, 3 sek. (soldering iron) (IEC 60068-2-20)

Soldering Heat Resistance
260°C, 5 sec. (soldering bath) (IEC 60068-2-20)

Minimum Cross Section
Conductor - 2.5mm²

Marking
803, 500 V, Approvals

Unit Weight
4.9 g (803) / 2.0 g (816)

Specifications are subject to change without notice

找PDF 维库一下 pdf.dzsc.com