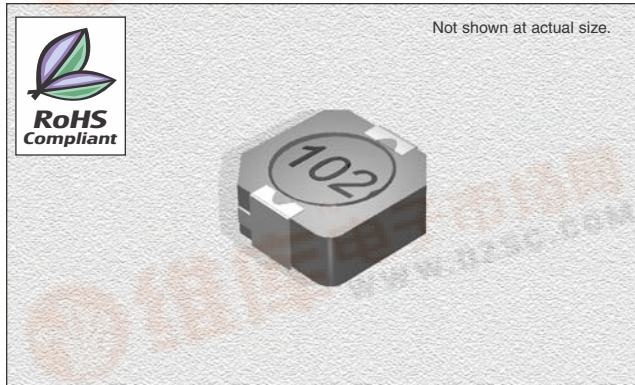


查询"CTCDRH105RF-220N"供应商


CTCDRH105RF Series

From 6.8 μ H to 1000 μ H

CHARACTERISTICS

Description: SMD (shielded) power inductor**Applications:** Power supplies for VTR, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters, etc.**Operating Temperature:** -30°C to +100°C**Inductance Tolerance:** $\pm 30\%$ **Testing:** Tested on a HP4285A at 100 KHz, 0.25Vrms, 0Adc**Packaging:** Tape & Reel**Marking:** Parts are marked with inductance code**Miscellaneous:** RoHS Compliant.**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**

PAD LAYOUT

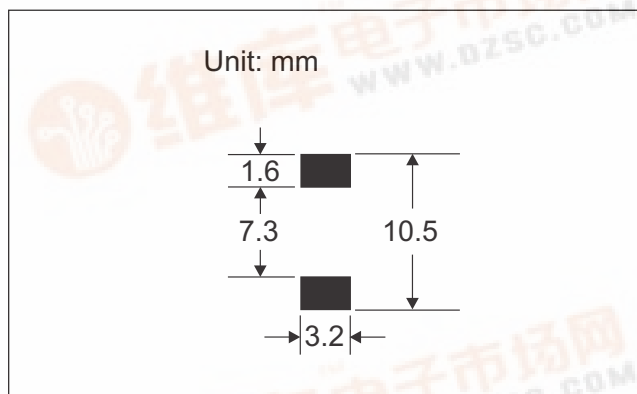


SPECIFICATIONS

Parts are available in $\pm 30\%$ tolerance only.*This indicates the current when the inductance decreases to 65% over its nominal value or D.C. current when the temperature rises $\Delta T = 40^\circ\text{C}$ lower, whichever is lower.

Part Number	Inductance ($\mu\text{H} \pm 30\%$)	L Test Freq. (kHz)	DCR Max. (m Ω)	*Rated DC Current (A)
CTCDRH105RF-6R8N	6.8	100	18.0	5.40
CTCDRH105RF-100N	10	100	25.8	4.50
CTCDRH105RF-120N	12	100	32.0	4.00
CTCDRH105RF-150N	15	100	40.0	3.60
CTCDRH105RF-180N	18	100	46.0	3.20
CTCDRH105RF-220N	22	100	58.5	2.95
CTCDRH105RF-270N	27	100	65.4	2.70
CTCDRH105RF-330N	33	100	81.4	2.40
CTCDRH105RF-390N	39	100	103.1	2.30
CTCDRH105RF-470N	47	100	122.1	2.00
CTCDRH105RF-560N	56	100	144.8	1.90
CTCDRH105RF-680N	68	100	193.0	1.65
CTCDRH105RF-820N	82	100	219.4	1.50
CTCDRH105RF-101N	100	100	247.0	1.35
CTCDRH105RF-121N	120	100	298.4	1.28
CTCDRH105RF-151N	150	100	355.1	1.12
CTCDRH105RF-181N	180	100	394.3	1.04
CTCDRH105RF-221N	220	100	483.8	0.94
CTCDRH105RF-271N	270	100	632.5	0.84
CTCDRH105RF-331N	330	100	780.0	0.75
CTCDRH105RF-391N	390	100	957.5	0.70
CTCDRH105RF-471N	470	100	1220.4	0.60
CTCDRH105RF-561N	560	100	1352.4	0.54
CTCDRH105RF-681N	680	100	1519.2	0.52
CTCDRH105RF-821N	820	100	1694.4	0.50
CTCDRH105RF-102N	1000	100	1946.4	0.48

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Max.	D	E	F
mm	10.3	10.5	5.1	3.0 $\pm$ 0.1	7.7 $\pm$ 0.3	1.2 $\pm$ 0.15
inches	0.406	0.413	0.201	0.12 $\pm$ 0.003	0.30 $\pm$ 0.01	0.05 $\pm$ 0.006

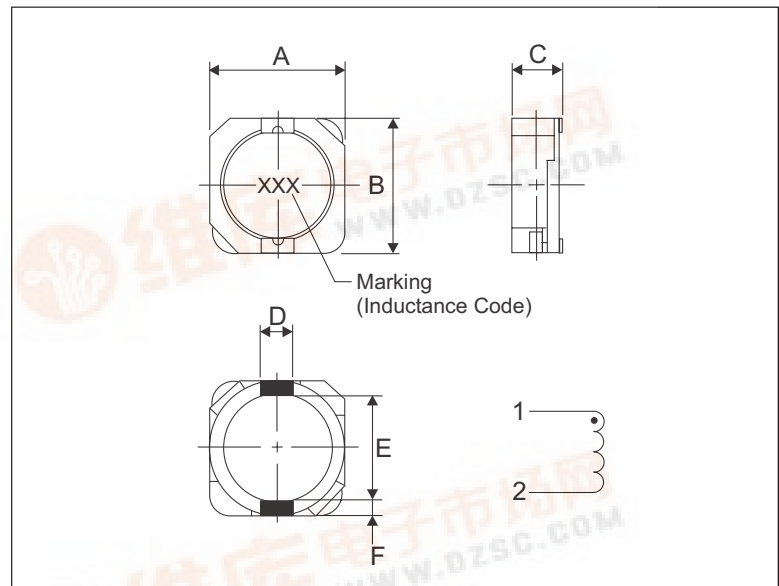

02.12.07

Manufacturer of Passive and Discrete Semiconductor Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2007 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

