


POWER TRANSFORMER

查询"DST3-10"供应商

DST3-10 (F) SERIES


1. CONFIGURATION & DIMENSIONS :

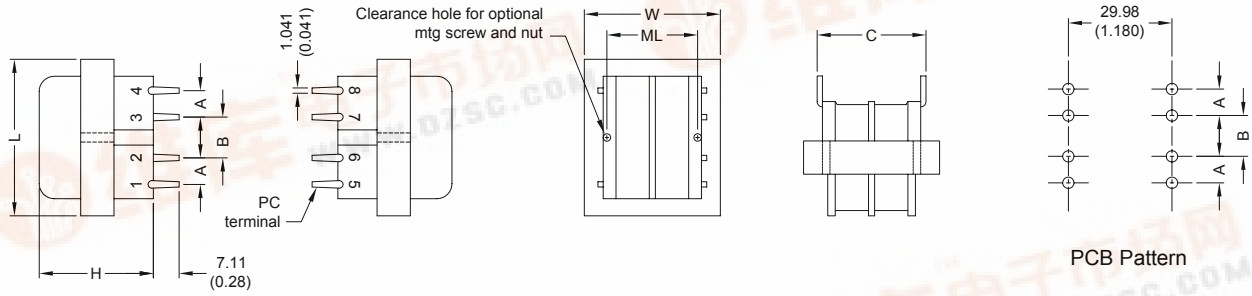

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
3	2.4	35.50 (1.40)	30.00 (1.180)	30.50 (1.20)	----	6.35 (.250)	6.35 (.250)	30.48 (1.200)	None	112

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- a. Primary Voltage AC 115/230 V 50/60 Hz .
- b. No Load Primary Current
Input AC 115V 60Hz . Less Than 15mA .
Input AC 230V 50Hz . Less Than 15mA .
- c. Secondary Voltage (±5%)
Series AC 13.40V .
Parallel AC 6.70V .
- d. Secondary Load Current
Series 0.25A .
Parallel 0.50A .
- e. Full Load Primary Current
Input AC 115V 60Hz . Less Than 40mA .
Input AC 230V 50Hz . Less Than 25mA .
- f. Full Load Secondary Voltage (±5%)
Series 10.00V .
Parallel 5.00V .
- g. DC Resistance
Pin 1-2 Primary = 729 Ohm .
Pin 3-4 = 925 Ohm .
Pin 5-6 Secondary = 2.52 Ohm .
Pin 7-8 = 3.12 Ohm .
- h. Insulation Resistance DC 500V 100Meg Ohm Of More .
- i. Withstand Voltage (Hi-Pot) AC 2500V 60Hz 1 Minutes .
- j. Temperature Rise Less Than 60 Deg C .
- k. Core Size EI-35 x 14.00 m/m .



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1

