



查询"2N6534B"供应商

**SEME
LAB**

2N6534B

Dimensions in mm (inches).


**Bipolar NPN Device in a
Hermetically sealed TO66
Metal Package.**

Bipolar NPN Device.

$$V_{CEO} = 80V$$

$$I_C = 8A$$

All Semelab hermetically sealed products
can be processed in accordance with the
requirements of BS, CECC and JAN,
JANTX, JANTXV and JANS specifications

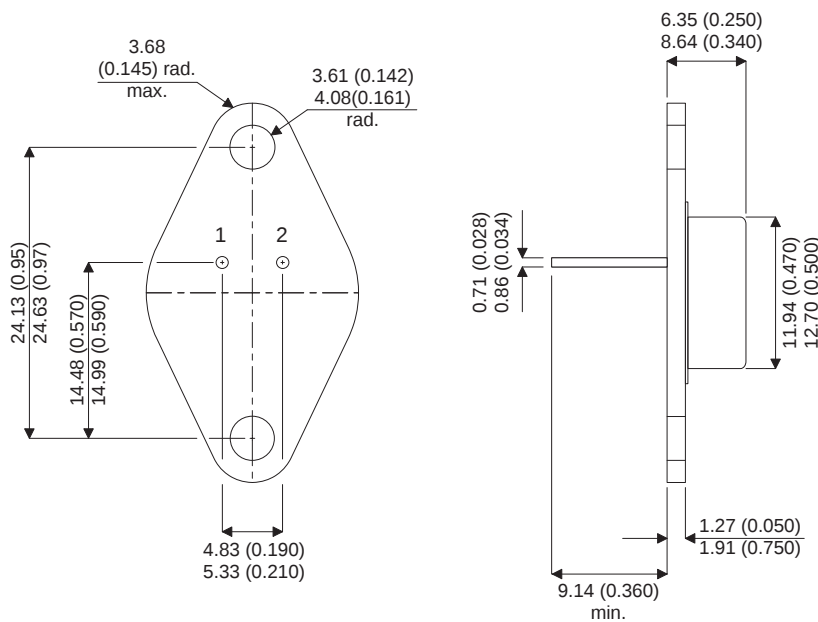

**TO66 (TO213AA)
PINOUTS**

1 – Base 2 – Emitter Case – Collector

Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{CEO}^*				80	V
$I_{C(CONT)}$				8	A
h_{FE}	@ 3/8 (V_{CE} / I_C)	100		5000	-
f_t			20M		Hz
P_D				14	W

* Maximum Working Voltage

This is a shortform datasheet. For a full datasheet please contact sales@semelab.co.uk.

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use.

Semelab plc.

Telephone +44(0)1455 556565. Fax +44(0)1455 552612.

E-mail: sales@semelab.co.uk Website: <http://www.semelab.co.uk>

Generated
1-Aug-02