


60 Watts

查询"LPS55-M"供应商

LPS50-M Series

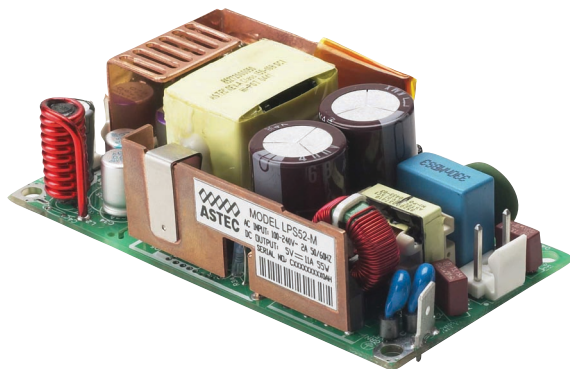

Special Features

- Medical Safety Approvals
- Universal input
- 2" x 4" footprint
- Remote sense
- Overload and short circuit protection
- Adjustable Output Voltage
- High efficiency
- High MTBF
- Built in EMI filter (CISPR 22 Class B)
- LED power good indicator
- Input power <74 watts
- Complies with EN61000-3-2
- UL Class I approved
- UL Class II available, consult factory

Environmental

Operating temperature: 0° to 50°C ambient derate each output as 2.5% per degree from 50° to 70°C. -20°C start up.

Storage temperature: -40°C to +85°C

Electromagnetic susceptibility: designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3

Humidity: Operating; non-condensing 10% to 95%RH

Vibration: IEC68-2-6 to the levels of IEC721-3-2

MTBF demonstrated: >550,000 hours at full load and 25°C ambient conditions.

Total Power: **55-60 Watts**
Input Voltage: **90-264 VAC**
127-300 VDC
of Outputs: **Single**

Electrical Specs

Input

Input range 90-264 VAC (wide range)
127-300 VDC
Frequency 47-440 Hz
Inrush current <60 A peak @ 230 VAC, cold start @ 25°C
Input power <74 Watts
Efficiency 80-85% typical at full load
EMI RFI FCC Class B conducted
CISPR 22 Class B conducted
EN55022 class B conducted
VDE 0878 PT3 class B conducted
Safety ground leakage current 275 uA @ 50/60 Hz, 264 VAC input

Output

Maximum power 60 W for convection (LPS52, 55W)
Adjustment range ±20% minimum
Hold-up time 10/20 ms 115/230 VAC Input line
Overload protection Short circuit protection on all outputs. Case overload protected @ 110-160% of normal rating
Overvoltage protection 30-50% above nominal output
Remote sense Compensates for 0.5 V lead drop max. Will operate without remote sense connected. Reverse connection protected.

Safety

UL UL 60601-1
CSA CSA-C22.2 No. 601.1-M90
VDE EN60601-1
CE LVD & EMC

AMERICAS

5810 Van Allen Way
Carlsbad, CA 92008
Telephone: 760-930-4600
Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX, UK
Telephone: 44 (1384) 842-211
Facsimile: 44(1384) 843-355

ASIA

Units 2111-2116, Level 21
Tower 1, Metroplaza
223, Hing Fong Road
Kwai Fong, New Territories
Hong Kong
Telephone: 852-2437-9662
Facsimile: 852-2402-4426



Ordering Information

Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Peak Load1	Regulation2	Ripple P/P (PARD)3
LPS52-M	5V	0 A	11 A	12 A	±2%	50 mV
LPS53-M	12V	0 A	5 A	5.4 A	±2%	120 mV
LPS54-M	15V	0 A	4 A	4.4 A	±2%	150 mV
LPS55-M	24V	0 A	2.5 A	2.75 A	±2%	240 mV
LPS58-M	48V	0 A	1.25 A	1.35 A	±2%	480 mV

1. Peak current lasting <15 seconds with a maximum 10% duty cycle.
2. At 25°C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 μ F (tantalum capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges.

Pin Assignments

Connector	LPS52-M	LPS53-M	LPS54-M	LPS55-M	LPS58-M
SK1-1	Line	Line	Line	Line	Line
SK1-3	Neutral	Neutral	Neutral	Neutral	Neutral
SK2-1	+5 V	+12 V	+15V	+24V	+48
SK2-2	+5 V	+12 V	+15V	+24V	+48
SK2-3	Common	Common	Common	Common	Common
SK2-4	Common	Common	Common	Common	Common
SK2-5	-Sense	-Sense	-Sense	-Sense	-Sense
SK2-6	+Sense	+Sense	+Sense	+Sense	+Sense

Mating Connectors

AC Input: Molex 09-50-8031 (USA)
09-91-0300 (UK)
PINS: 08-58-0111

DC Outputs: Molex 09-50-8061 (USA)
09-91-0600 (UK)
PINS: 08-58-0111

Astec Connector Kit #70-841-006, includes all of the above

Notes:

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ± 0.02 " (± 0.5 mm)
3. Mounting holes M1 and M2 should be grounded for EMI purposes.
4. Mounting hole M1 is safety ground connection.
5. Specifications are for convection rating at factory settings at 115 VAC input, 25°C unless otherwise stated.
6. Warranty: 1 year
7. Weight: .41lbs/.18kg

