

查询"CTMBT4018F-4512"供应商

CTMBT4018F-4512



APPLICATIONS

- Cellular Phones
- Pagers
- Communication Equipment
- Household Appliances
- Security and Electronic Devices

FEATURES


- Small and slim size
- Designed for reflow process
- Tape and reel packaging for auto mounting

ELECTRICAL CHARACTERISTICS


Specifications		Conditions
Rated Voltage	3.3V _{o-p}	
Operating Voltage	2.0V ~ 4.0V _{o-p}	
Rated Current	100mA Max.	
Coil Resistance	12Ω ±3	
Sound Pressure Level (at 10cm)	78dBA Min.	f=4.5kHz, V _{p-p} =3.3Vdc 1/2 Duty Square Wave
Resonant Frequency	4.5kHz	
Operating Temperature	-30°C to +70°C	
Storage Temperature	-40°C to +85°C	

Note: All data at 25°C, Humidity 40%~80% unless otherwise specified.


Physical Dimensions (mm)

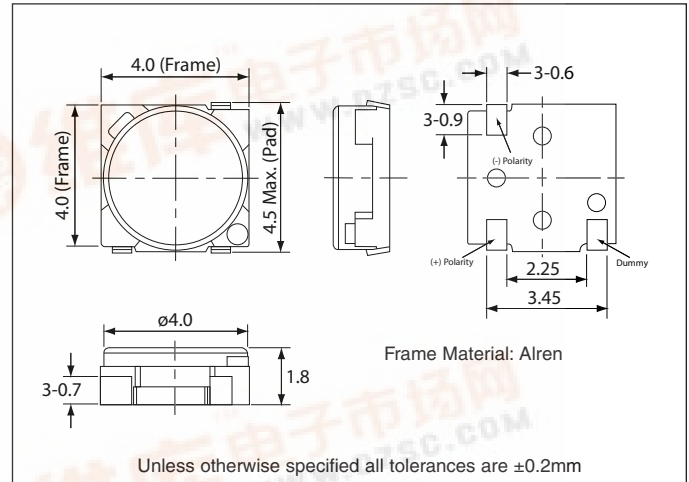

Recommended PCB Layout (mm)

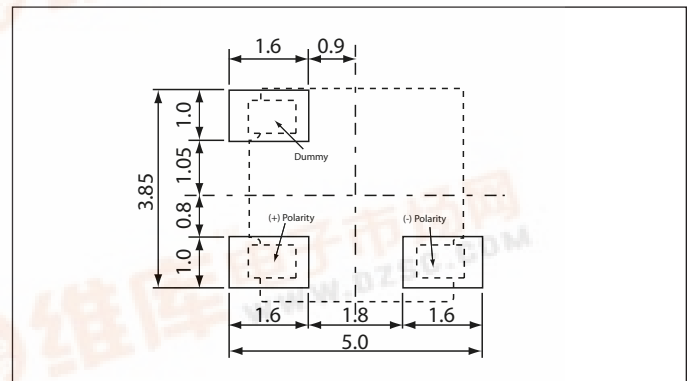

Frequency Response Curve

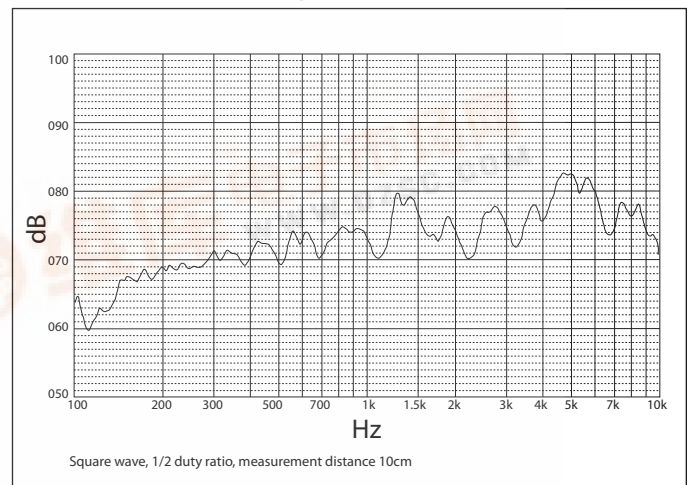

08.12.09

Manufacturer of Passive Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2009 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice