


4

3

2



1

used for: D-SUB COMBINATION

[查询"132C11039X"供应商](#)


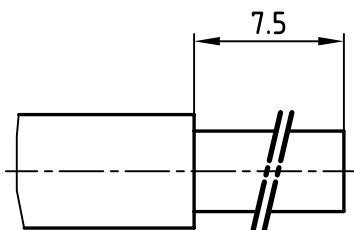
(c)

Selector settings	Crimp height A
7 for AWG 10	2.19 - 2.41
6 for AWG 12	1.94 - 2.05

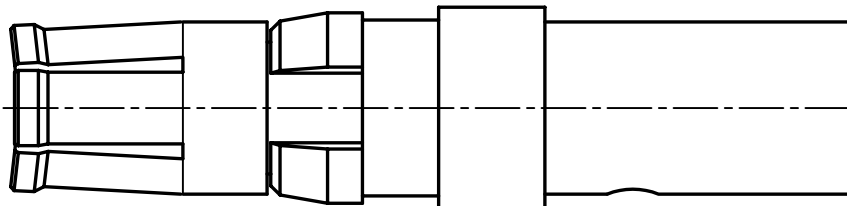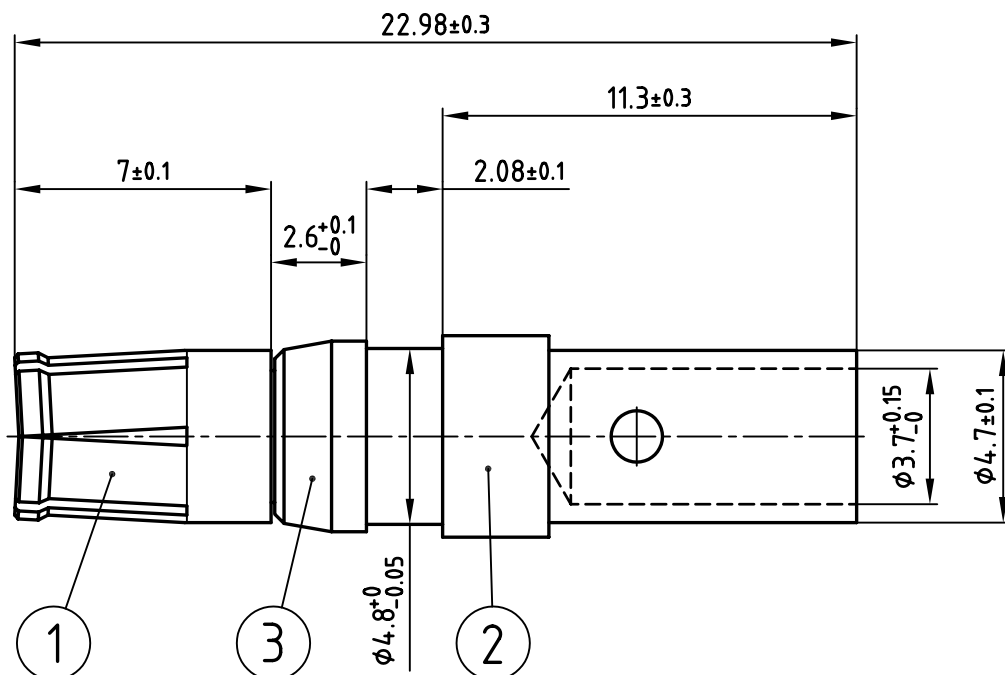

Directive 2002/95/EC
"RoHS"
Compliant

(b) STRIPPING DIMENSIONS



NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 2: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL


ITEM 3: NICKEL PLATED

(b) 3. CRIMPING: USE CRIMP TOOL 360X10409X WITH
TOOL INSERT 360X20029X
SELECTOR SETTINGS: 7 FOR AWG 10; 6 FOR AWG 12

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

			tolerance			
			1998	date	name	
			drawn	23.03.	Barcinski	
			appd.	23.03.	Mickenbecker	
			norm			
			d-old			
1 x c	Ä 2197	01.04.2005	Lehmen			
2 x b	Ä 2177	02.03.2005	Lehmen			
rev.	description	date	name			



scale: 5:1
material: SEE NOTES

title:
HIGH POWER CONTACT FEMALE
CRIMP VERSION 30A
D-SUB COMBINATION

dwg no: AutoCAD/REL.13 DIN-A
13K11E9A 4
sh: 1/1

part no: 132C11039X

4

3

2

1