





Chip Attenuator 0.1 Watt DC to 3 GHz


The content of this specification may change without notification 11/01/08



Dimensions and Schematics

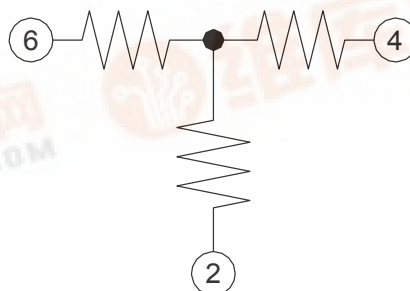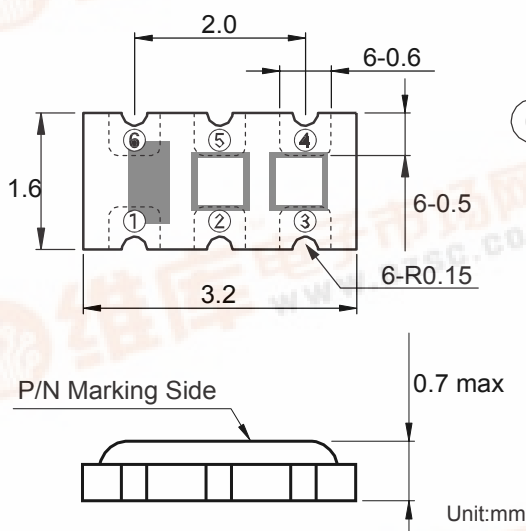

- ①, ③, ⑤ : N. C
- ② : GND
- ④, ⑥ : Input / Output




Rating

Style No.	Frequency Range [MHz]	Attenuation [dB]	Rated Power [W]	VSWR	Impedance [Ω]	Working Temp. Range [C]
CAT3131-0020	DC~1000	20±1.3	1 / 10	1.25 max.	50	-55 ~ +125 C
CAT3131-0003	DC~3000	3±0.5				
CAT3131-0006	DC~3000	6±0.5				
CAT3131-0010	DC~3000	10±0.7				

- For other attenuations, if required. Please contact us for possibility.
- Test Fixture : Teflon 0.4 mm

Recommendable Footprint

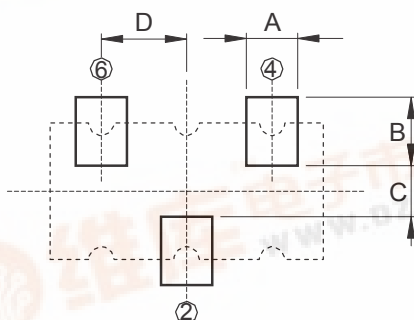

Unit : mm

A	0.6±0.1
B	0.8±0.1
C	0.6±0.1
D	1.0±0.1

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn