

FEATURES

- OUTPUT CURRENT UP TO 16A
- SMALL SIZE AND LOW PROFILE :
1.30" X 0.53" X 0.30" (SMD) ; 2.00" X 0.50" X 0.28" (SIP)
- HIGH EFFICIENCY - 95% @ 3.3V FULL LOAD
- INPUT RANGE FROM 2.4VDC TO 5.5VDC
- FIXED SWITCHING FREQUENCY (300KHZ)
- SMD & SIP PACKAGES
- OUTPUT VOLTAGE PROGRAMMABLE FROM 0.75VDC TO 3.3VDC VIA EXTERNAL RESISTOR
- INPUT UNDER-VOLTAGE LOCKOUT
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Distributed Power Architectures
Semiconductor Equipment
Microprocessor Power Applications

OPTIONS

Positive Logic Remote on/off


DESCRIPTION

DOS16-05T (SMD type), DOH16-05T (for Vertical Mounting SIP type) and DOH16-05TA (for Horizontal Mounting SIP type) are non-isolated DC/DC converters that can deliver up to 16A of output current with full load efficiency of 95% at 3.3V output.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output current			16A max
Voltage accuracy	Full load and Vin(nom)		± 2%Vo(set)
Minimum load			0%
Line regulation	Vin=Vo(set)+0.5V to Vin(max) at Full Load		± 0.3%Vo(set),typ
Load regulation	No Load to Full Load		± 0.4%Vo(set),typ
Ripple and noise (Note2)	20MHz bandwidth		15mVrms,max 50mVp-p,max
Temperature coefficient			±0.4%, typ
Dynamic load response (Note 2)	$\Delta I_o / \Delta t = 2.5A/\mu S$, Vin(nom)	Peak deviation	300mV,typ
	Load change step (50% to 100% or 100% to 50% of Io(max))	Setting time (Vo<10%peak deviation)	25μS,typ
	$\Delta I_o / \Delta t = 2.5A/\mu S$, Vin(nom)	Peak deviation	150mV,typ
Dynamic load response (Note 3)	$\Delta I_o / \Delta t = 2.5A/\mu S$, Vin(nom)	Peak deviation	150mV,typ
	Load change step (50% to 100% or 100% to 50% of Io(max))	Setting time (Vo<10%peak deviation)	100μS,typ
Output current limit			180%,typ
Output short-circuit current		Hiccup, automatics recovery	
External load capacitance	ESR ≥ 1mΩ		1000μF,max
	ESR ≥ 10mΩ		5000μF,max
Output voltage overshoot-startup	Vin=2.4~5.5V, F.L.		1%Vo(set)
Voltage adjustability (see fig.1)	(Note 4)		0.7525V ~ 3.63V
GENERAL SPECIFICATIONS			
Efficiency			See table
Isolation voltage			None
Switching frequency			300KHz, typ
Approvals and standard			IEC60950-1, UL60950-1, EN60950-1
Dimensions	SMD		1.30 X 0.53 X 0.30 Inch (33.0 X 13.5 X 7.7 mm)
	SIP		2.00 X 0.50 X 0.28 Inch (50.8 X 12.7 X 7.2 mm)
Weight			6.0g(0.22oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332		1.428 x 10 ⁷ hrs
	MIL-HDBK-217F		6.523 x 10 ⁵ hrs

INPUT SPECIFICATIONS			
Input voltage range	Vo(set) < Vin - 0.5V		2.4 - 5.5VDC
Maximum input current	Vin=2.4 to 5.5V; Io=Io(max)		16A
Input filter (Note 5)			C filter
Input no load current (Vin=5V, Io=0, module enabled)	Vo(set) =0.75Vdc		100mA,typ
	Vo(set) =3.3Vdc		130mA,typ
Input under voltage lockout	Start-up voltage		2.2V,typ
	Shutdown voltage		2.0V,typ
Input reflected ripple current	5~20MHz, 1μH source impedance		100mA-p-p
ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature			-40°C ~ +85°C(with derating)
Storage temperature range			-55°C ~ +125°C
Thermal shock			MIL-STD-810F
Over temperature protection			125°C,typ
FEATURE SPECIFICATIONS			
Remote ON/OFF(Note 6)			
Negative logic(standard)	ON = 0V < Vr < 0.3V		IIN=10μA,max
	OFF =1.5V < Vr < Vin(max)		IIN=1mA,max
Positive logic(option)	ON = Vin(max)		IIN=10μA,max
	OFF=0V < Vr < 0.3V		IIN=1mA,max
Input current of Remote control pin			10μA~1.0mA
Remote off state input current	Nominal Vin		1.5mA,typ
Remote sense range			0.5V,max
Rise time	Time for Vo to rise from 10% to 90%of Vo(set)		6ms,max.
Turn-on delay time	Case 1 (Note 7)		1ms,typ
	Case 2 (Note 8)		1ms,typ

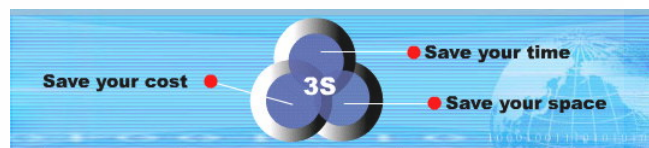

**POWER MATE**

P-DUKE

查物DC/DC技术供应商
TECHNOLOGY CO.,LTD.**DOS16-05T**

Non-isolated

DOH16-05T

Point of load DC/DC converters

Model Name	ON/OFF Logic	Package	Input Voltage	Output Voltage	Output Current		Efficiency (%)
					Min. Load	Max. Load	5.0Vin, 3.3Vdc@16A
DOS16-05T	Negative	SMD	2.4 ~ 5.5Vdc Vin(min)=Vo(set)+0.5V	0.75 ~ 3.3Vdc	0A	16A	95%
DOS16-05T-P	Positive						
DOH16-05T	Negative	Vertical Mounting SIP					
DOH16-05T-P	Positive						
DOH16-05TA	Negative	Horizontal Mounting SIP					
DOH16-05TA-P	Positive						

Note

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. External with C_{out} = 1μF ceramic//10μF tantalum capacitors.
3. External with C_{out} = 2x150μF polymer capacitors.
4. Output voltage programmable from 0.75V to 3.3V by connecting a single resistor (shown as R_{trim} in Table 1) between the TRIM and GND pins of the module. To calculate the value of the resistor **R_{trim}** for a particular output voltage **Vo**, use the following equation:

$$R_{trim} = \left[\frac{21070}{V_o - 0.7525} - 5110 \right] \Omega$$

5. It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C_{in} is 4x150μF low-ESR polymer capacitors // 4x47μF ceramic capacitors at least.
6. Device code with suffix "-P" – Positive logic(On/Off is open collector/drain logic input; Signal referenced to GND)
Device code with no suffix – Negative logic (On/Off pin is open collector/drain logic input with external pull –up resistor; signal referenced to GND)
7. Case 1 :On/Off input is set to logic low (module on) and then input power is applied (delay from instant at which Vin=Vin(min) until Vo=10% of Vo(set))
8. Case 2 :Input power is applied for at least one second and then the On/Off input is set to logic low (delay from instant at which Von/off=0.3V until Vo=10% of Vo(set))

CAUTION: This power module is not internally fused. An input line fuse must always be used.

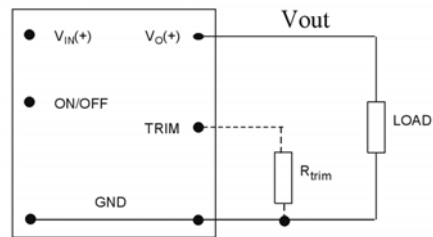
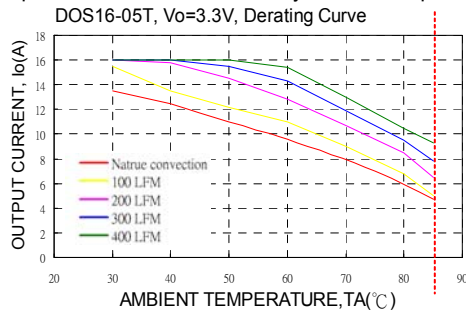


Fig. 1


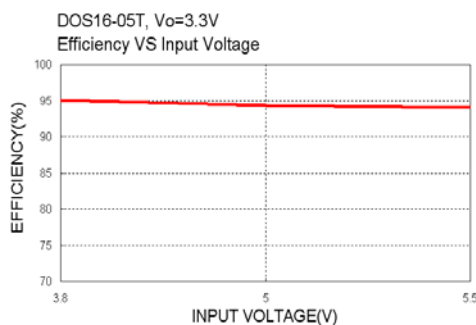


Table 1	
Vo(set) (V)	Rtrim (KΩ)
0.7525	Open
1.2	41.973
1.5	23.077
1.8	15.004
2.5	6.974
3.3	3.160



DOH16-05T

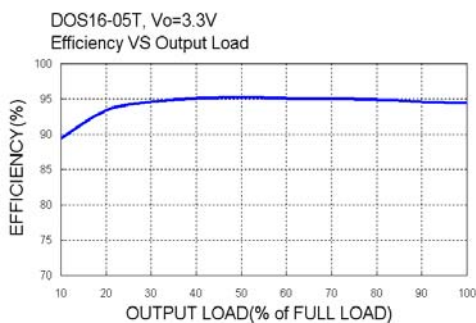