


# MODEL 72

3/8" Square

## Single Turn Cermet Trimming Potentiometer

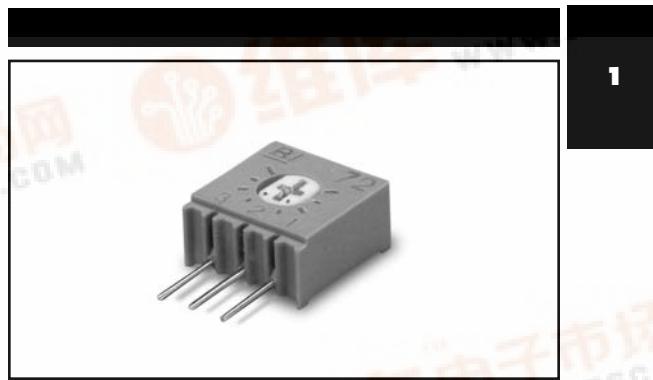

### ELECTRICAL

Standard Resistance Range, Ohms	10 to 2Meg
Standard Resistance Tolerance	±10% (<100 Ohms = ±20%)
Input Voltage, Maximum	200 Vdc or rms not to exceed power rating
Slider Current, Maximum	100mA or within rated power, whichever is less
Power Rating, Watts	0.5 at 85°C derating to 0 at 125°C
End Resistance, Maximum	2 Ohms
Actual Electrical Travel, Nominal	244°
Dielectric Strength	900 Vrms
Insulation Resistance, Minimum	1,000 Megohms
Resolution	Essentially infinite
Contact Resistance Variation, Maximum	1% or 1 Ohm, whichever is greater

### ENVIRONMENTAL

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient, Maximum	±100ppm/°C
Operating Temperature Range	-55°C to +125°C
Thermal Shock	5 cycles, -55°C to +125°C (1% ΔRT, 1% ΔVR)
Moisture Resistance	Ten 24 hour cycles (1% ΔRT, IR 100 Megohms Min.)
Shock, 6ms Sawtooth	100G's (1% ΔRT, 1% ΔVR)
Vibration	20G's, 10 to 2,000 Hz (1% ΔRT, 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT, 2% ΔVR)
Rotational Life	200 cycles (3% ΔRT)
Load Life at 0.5 Watts	1,000 hours at 70°C (2% ΔRT)
Resistance to Solder Heat	260°C for 10 sec. (1% ΔRT)

### MECHANICAL

Mechanical Stops	Solid
Torque, Starting Maximum	3 oz.-in. (0.021 N-m)
Weight, Nominal	.025 oz. (0.70 grams)


Fluorinert® is a registered trademark of 3M Company.  
Specifications subject to change without notice.



**TOP ADJUSTMENT (Inch/mm)**


## 查询"72PR1KLFTR"供应商

## Model 72P

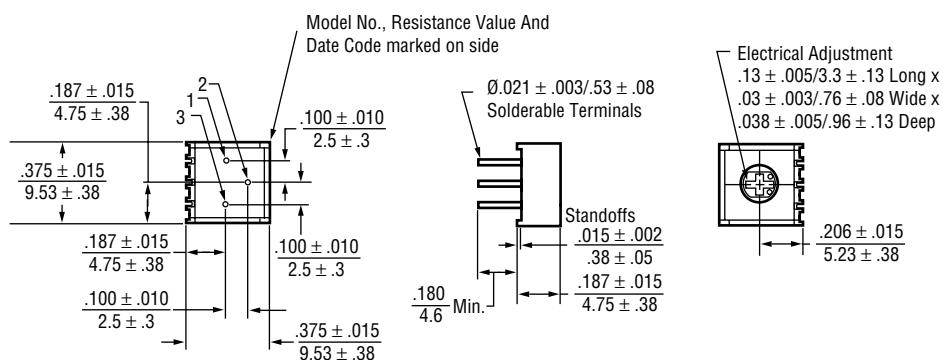


**Note: Model 72P dimensions applicable to all other models except as noted.**


## Model 72PL

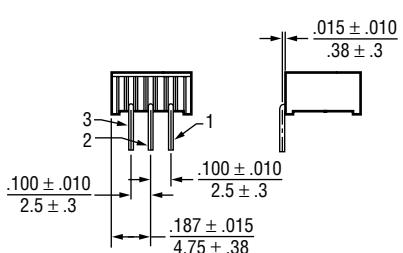

## Model 72PM

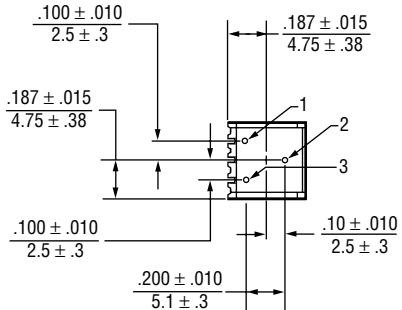


## Model 72PX, 72RPX

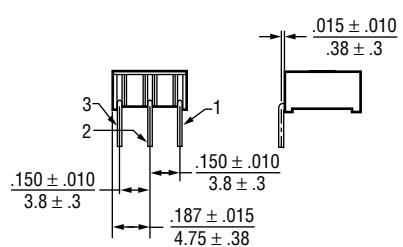

Model 72RPX - Terminals 1 and 3 are reversed


## Model 72RP

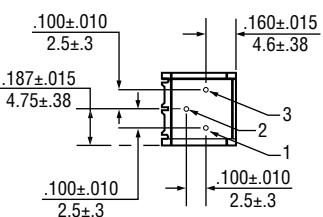

## SIDE ADJUSTMENT (Inch/mm)


### 查询"72PR1KLFTR"供应商

Model 72X, 72RX

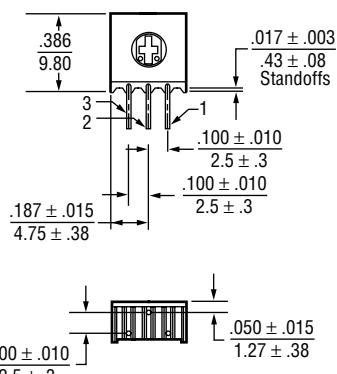


Model 72RX - Terminals 1 and 3 are reversed

Model 72XL, 72RXL, 72RW

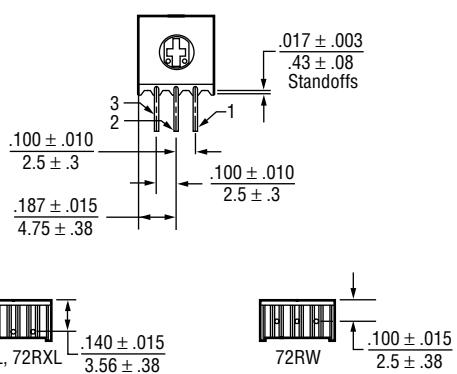

Model 72RXL And 72RW - Terminals 1 and 3 are reversed


Model 72XW, 72RXW

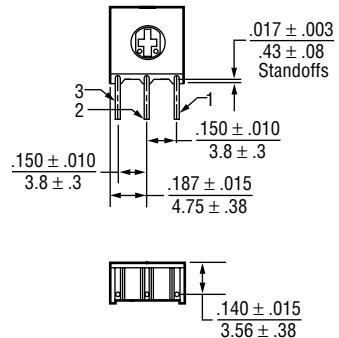

Model 72RXW - Terminals 1 and 3 are reversed


**EXTENDED ROTOR OPTION (Inch/mm)****查询"72PR1KLFTR"供应商**

Available for all Model 72 pin styles:

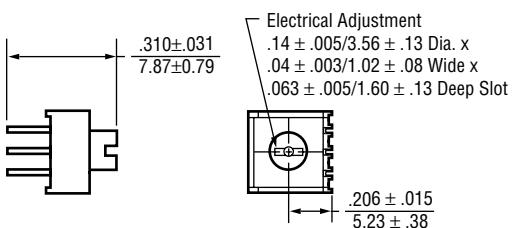72PE, 72PLE, 72PME, 72PXE, 72RPXE, 72XE, 72RXE,  
72XLE, 72RXLE, 72RWE, 72XWE, 72RXWE**ADJUSTMENT KNOB OPTION (Inch/mm)****Available options:**

72XT- Side Adjustment (See 72X for Pin Configuration)

72PT- Top Adjustment (See 72P for Pin Configuration)

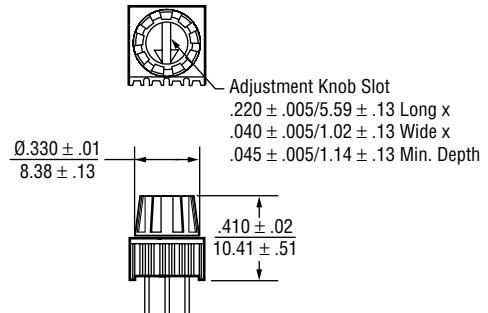

72PT Shown - Dimensions applicable to 72XT

**STANDARD RESISTANCE VALUES, OHMS**

10	100	1K	10K	50K	250K	2Meg
20	200	2K	20K	100K	500K	
50	500	5K	25K	200K	1Meg	

查询"72PR1KLFTR"供应商

**Standard:** Boxes

Capacity = 100 Units

**Option:** Tubes

All units oriented with #1 pin to same side.

	<b>Pin Style</b>	<b>P, PM</b>	<b>X, XL, XW, RW</b>
Magazine	Width	= 0.47"	0.29"
	Height	= 0.54"	0.76"
	Length	= 20.5"	20.1"
	Capacity	= 50 Units	50 Units

**Option:** Tape & Reel, Ammo Pack (Available only for 72RW only)

All units oriented with #1 pin to the right of the direction of feed.

	Seat Plane to Centerline of Sprocket Hole	= .71" (18.03 mm)
Tape	Width	= 18 mm
	Sprocket	= Single Hole .50" spacing
	Capacity	= 1,000 Units
Reel	Diameter	= 14" (356mm)
Ammo	Tape Fold	= 12" (305mm)
	Box	= 1.8" x 13" x 10" (46mm x 330mm x 254mm)

## **ORDERING INFORMATION**

查询"72PR1KLFTR"供应商

### **Standard:**

Diagram illustrating the component code for a resistor:

- Model Series:** 72
- Pin Style:** P
- Resistance Value:** 10K
- Resistance Prefix:** LF
- RoHS Compliant Product Code - Optional:** (No code shown)

## Option:

## Option:

Pin Style —————

Pin Style Suffix: \_\_\_\_\_ (Used with AP and TR packaging options. Applicable to pin style RW only. "F" designates 0.70" lead length.)

72 RW F R 10K LF TR

Packaging Option:  
 AP = Ammo pack  
 TR = Tape & Reel  
 (Pin style RW only)

RoHS Compliant Product Code - Optional

### Options:

72 X T R 10K LF


Pin Style —————— X P —————— LF

RoHS Compliant Product Code - Optional

Adjustment Options:

- T = Knob Option  
Applicable to pin style X & P only.
- E = Extended Rotor Option  
Applicable to all pin styles.

## CIRCUIT DIAGRAM

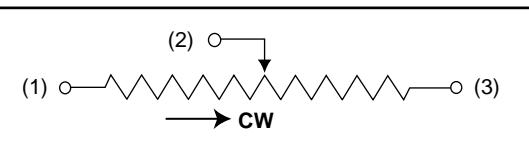

## NOTES

Metric equivalents, based on 1 inch = 25.4mm are rounded to the same number of significant figures as in the original English units and are provided for general information only.

Tolerances unless otherwise specified:  
Linear =  $\pm .01$  inches (.25mm)  
Angular =  $\pm 2$  degrees

