



MBR6020PT~MBR60100PT

60 AMPERES SCHOTTKY BARRIER RECTIFIERS


VOLTAGE 20 to 100 Volts **CURRENT** 60 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency.
- High current capability
- Guardring for overvoltage protection
- For use in low voltage,high frequency inverters free wheeling , and polarity protection applications.
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

MECHANICALDATA

Case: TO-3P molded plastic
 Terminals: solder plated, solderable per MIL-STD-750, Method 2026
 Polarity: As marked.
 Mounting Position: Any
 Weight: 0.2 ounces, 5.6 grams.

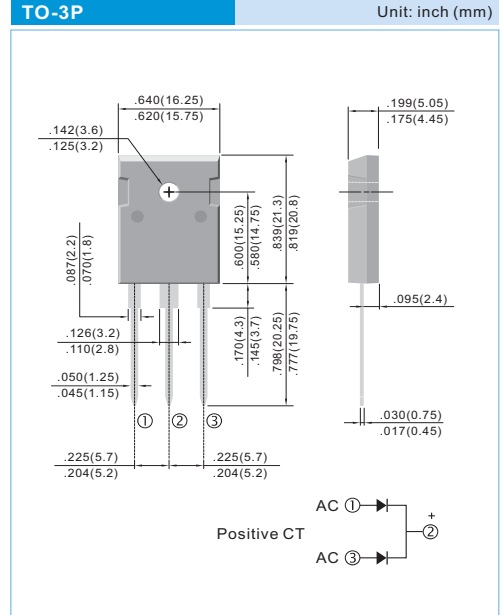

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

| PARAMETER | SYMBOL | MBR6020PT | MBR6030PT | MBR6040PT | MBR6045PT | MBR6050PT | MBR6060PT | MBR6080PT | MBR60100PT | UNITS |
|---|------------------|--------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|--------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 20 | 30 | 40 | 45 | 50 | 60 | 80 | 100 | V |
| Maximum RMS Voltage | V _{RMS} | 14 | 21 | 28 | 31.5 | 35 | 42 | 56 | 70 | V |
| Maximum DC Blocking Voltage | V _{DC} | 20 | 30 | 40 | 45 | 50 | 60 | 80 | 100 | V |
| Maximum Average Forward Current (See fig.1) | I _{AV} | 40 | | | | | | | | A |
| Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load(JEDEC method) | I _{FSM} | 400 | | | | | | | | A |
| Maximum Forward Voltage at 30A, per leg | V _F | 0.7 | | | | 0.8 | | | | V |
| Maximum DC Reverse Current T _c =25 °C at Rated DC Blocking Voltage T _c =125°C | I _R | | | | | 0.1 20 | | | | mA |
| Typical Thermal Resistance | R _{θJC} | 1.5 | | | | | | | | °C / W |
| Operating Junction Temperature Range | T _J | -50 TO + 150 | | | | | | | | °C |
| Storage Temperature Range | T _{STG} | -50 TO + 175 | | | | | | | | °C |

Notes :
 Both Bonding and Chip structure are available.



MBR6020PT~MBR60100PT

RATING AND CHARACTERISTIC CURVES

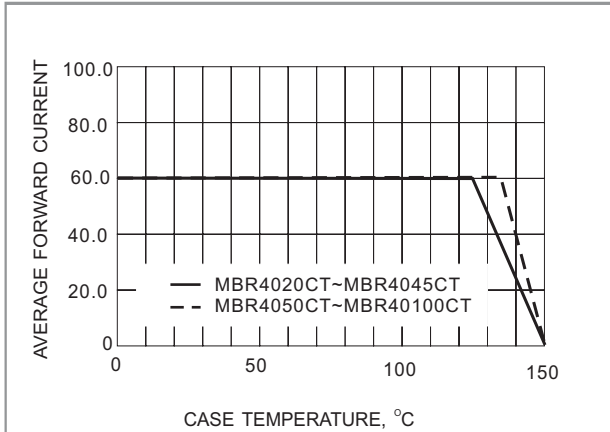


Fig.1- FORWARD CURRENT DERATING CURVE

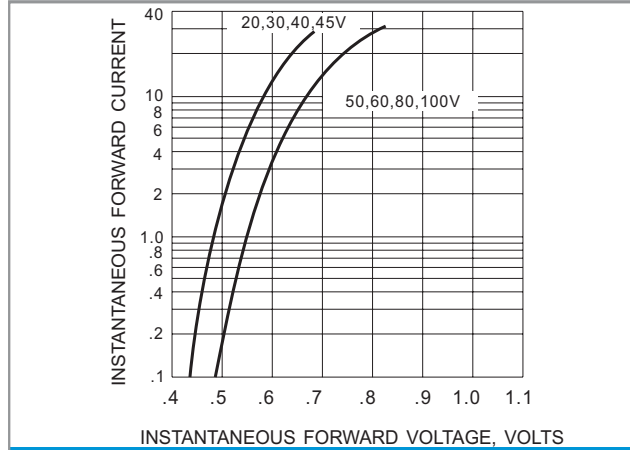


Fig.2- TYPICAL INSTANEOUS FORWARD CHARACTERISTIC

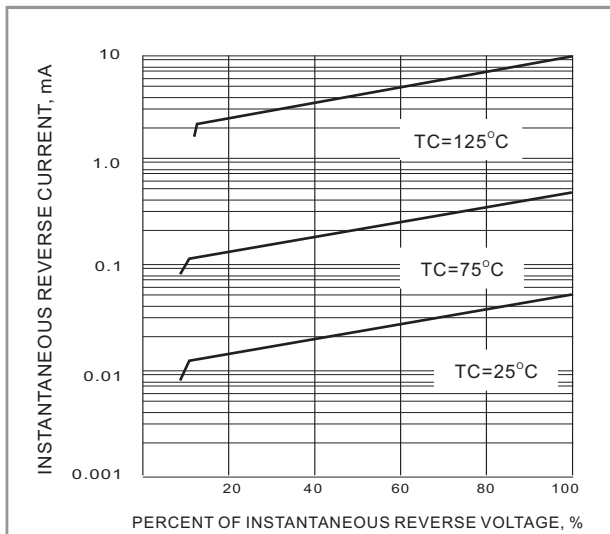


Fig.3- TYPICAL REVERSE CHARACTERISTICS

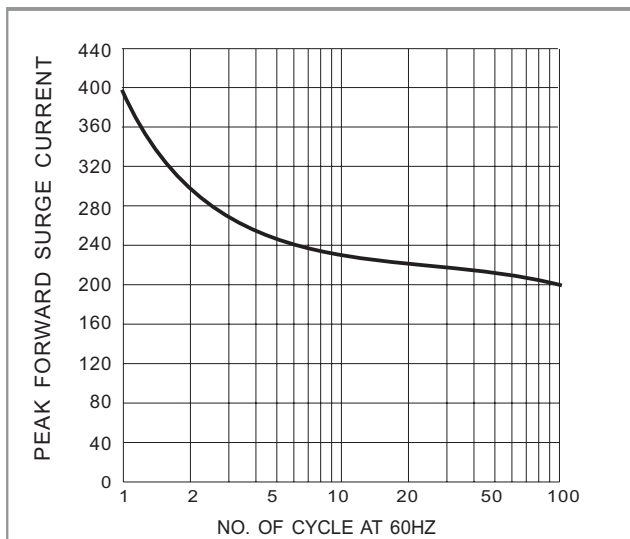


Fig.4- MAXIMUM NON-REPETITIVE SURGE CURRENT