

查询"CPPL-018"供货
CPLL-018 Model
 5X7 mm SMD, **3.3V, CMOS**

Lead Free
 RoHS
 Compliant

Programmable Clock Oscillator PLL Based Design




Designed to meet today's requirements for economical 3.3V applications. Available on 16mm tape and reel in quantities of 1K.


Frequency Range: 1.544MHz to 200MHz
Frequency Stability: ± 25 ppm, ± 50 ppm, ± 100 ppm
Temperature Range:
 Operating: 0°C to 70°C
 (Option M) -20°C to 70°C
 (Option X) -40°C to 85°C
Storage: -55°C to 120°C
Input Voltage: 3.3V $\pm$ 0.3V
Input Current: 45mA Max
Output: CMOS
 Symmetry: 40/60% Max @ 50% Vdd
 Rise/Fall Time: 10ns Max @ 20% to 80% Vdd
 Logic: "0" = 80% Vdd Max
 "1" = 90% Vdd Min
 Load: 15pF
 Jitter: 150pS pk-pk Max
Aging: <3ppm 1st/yr, <1ppm every year hereafter

Dimensions inches (mm)


All dimensions are Max unless otherwise specified.

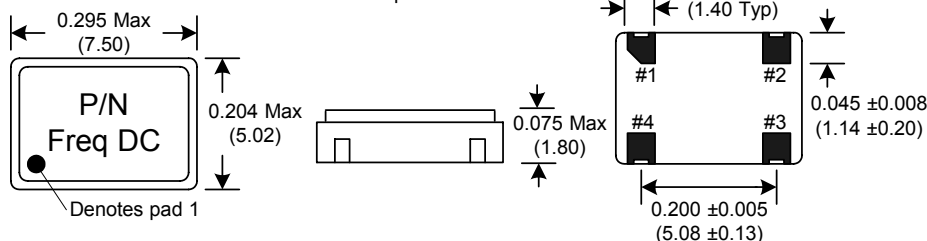


SUGGESTED PAD LAYOUT



RECOMMENDED REFLOW SOLDERING PROFILE

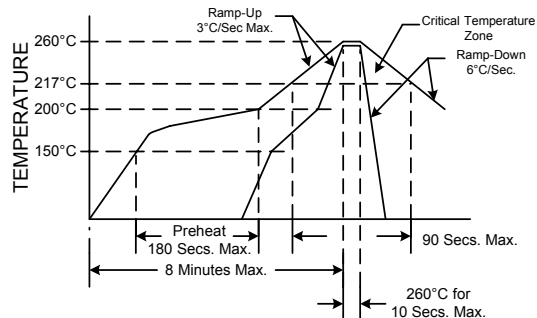

NOTE: Reflow Profile with 240°C peak also acceptable.

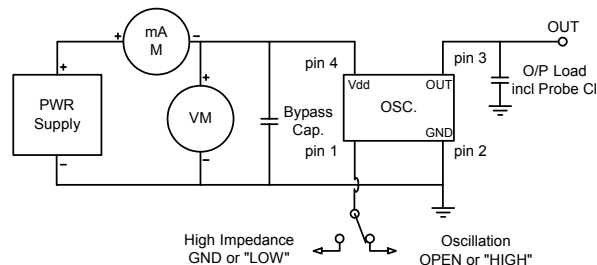

Crystek Part Number Guide

CPLL-018 X- 25 - 200.000

#1 Crystek Clock PLL Osc.
 #2 Model
 #3 Temp. Range: Blank= 0/70°C, M= -20/70°C, X= -40/85°C
 #4 Stability: (see Table 1)
 #5 Frequency in MHz: 3 or 6 decimal places

Stability Indicator

Blank (std) $\pm$ 100ppm
 25 $\pm$ 25ppm
 50 $\pm$ 50ppm

Table 1

Example:
 CPLL-018X-25-200.000 = 3.3V Tristate, -40/85°C, 25ppm, 200.000 MHz
 CPLL-018-50-19.660800 = 3.3V Tristate, 0/70, 50ppm, 19.660800 MHz

Tri-State Function

Function pin 1	Output pin
Open	Active
"1" level 2.4V Min	Active
"0" level 0.4V Max	High Z

Specifications subject to change without notice.

TD-040405 Rev.C



Crystek Crystals Corporation

12730 Commonwealth Drive • Fort Myers, FL 33913
 239.561.3311 • 800.237.3061 • FAX: 239.561.1025 • www.crystek.com