



SEMICONDUCTOR

TECHNICAL DATA

TOSHIBA FIELD EFFECT TRANSISTOR
2SK357

SILICON N CHANNEL MOS TYPE
(π -MOS)

HIGH SPEED, HIGH VOLTAGE SWITCHING APPLICATIONS.
DC-DC CONVERTER, MOTOR AND SOLENOID DRIVE APPLICATIONS.

FEATURES:


- . Low Drain-Source ON Resistance : $R_{DS(ON)}=0.6\Omega$ (Typ.)
- . High Forward Transfer Admittance: $|Y_{fs}|=1.8S$ (Typ.)
- . High Drain Current : $I_{DP}=8A$ (Max.)
- . Low Leakage Current: $I_{GSS}=\pm 100nA$ (Max.) @ $V_{GS}=\pm 20V$
- $I_{DSS}=1mA$ (Max.) @ $V_{DS}=150V$
- . Enhancement-Mode : $V_{th}=1.5\sim 3.5V$ @ $I_D=1mA$

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Drain-Source Voltage	V_{DSX}	150	V
Gate-Source Voltage	V_{GSS}	± 20	V
Drain Current	DC	I_D	5
	Pulse	I_{DP}	8
Drain Power Dissipation (Tc=25°C)	P_D	40	W
Channel Temperature	T_{ch}	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

INDUSTRIAL APPLICATIONS

Unit in mm

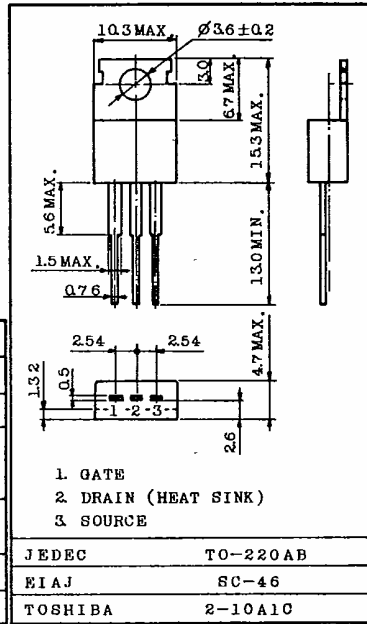

Weight : 1.9g

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0$	-	-	± 100	nA
Drain Cut-off Current	I_{DSS}	$V_{DS}=150V, V_{GS}=0$	-	-	1.0	mA
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D=10mA, V_{GS}=0$	150	-	-	V
Gate Threshold Voltage	V_{th}	$V_{DS}=10V, I_D=1mA$	1.5	-	3.5	V
Forward Transfer Admittance	$ Y_{fs} $	$V_{DS}=10V, I_D=3A$	0.8	1.8	-	S
Drain-Source ON Resistance	$R_{DS(ON)}$	$I_D=3A, V_{GS}=10V$	-	0.6	0.9	Ω
Drain-Source ON Voltage	$V_{DS(ON)}$	$I_D=8A, V_{GS}=10V$	-	5.5	9.5	V
Input Capacitance	C_{iss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	260	350	pF
Reverse Transfer Capacitance	C_{rss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	50	100	pF
Output Capacitance	C_{oss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	160	250	pF
Switching Time	Rise Time	t_r	-	30	60	ns
	Turn-on Time	t_{on}	-	40	80	
	Fall Time	t_f	-	20	50	
	Turn-off Time	t_{off}	-	60	120	

THIS TRANSISTOR IS THE ELECTROSTATIC SENSITIVE DEVICE. PLEASE HANDLE WITH CAUTION.







TOSHIBA CORPORATION



SEMICONDUCTOR

TECHNICAL DATA

2SK357

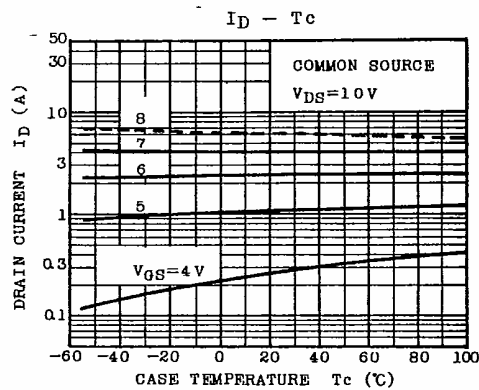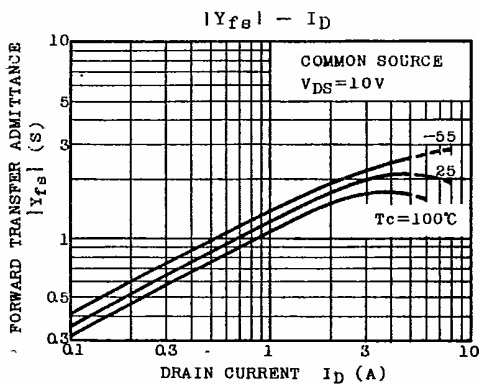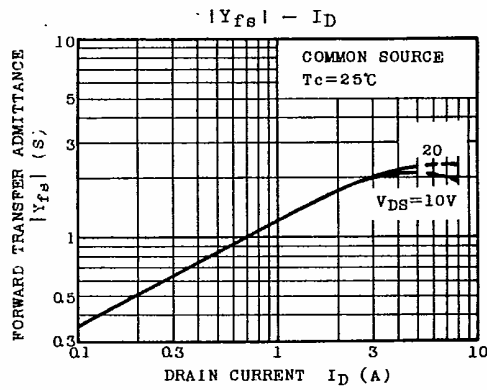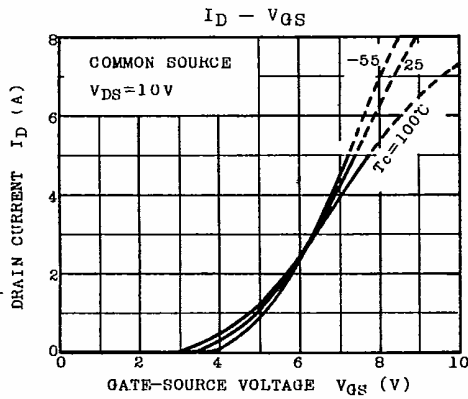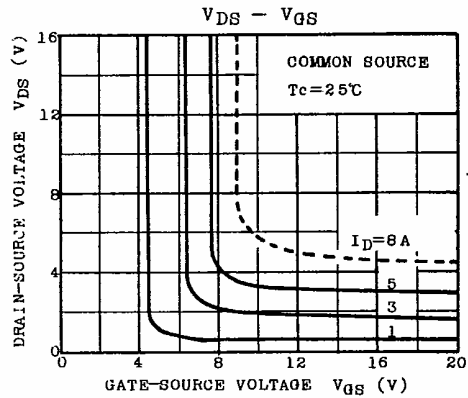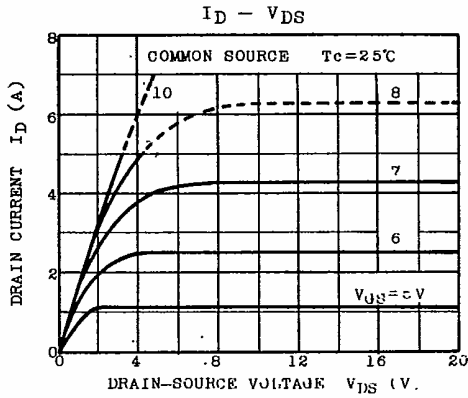







TOSHIBA CORPORATION



SEMICONDUCTOR

TECHNICAL DATA

2SK357

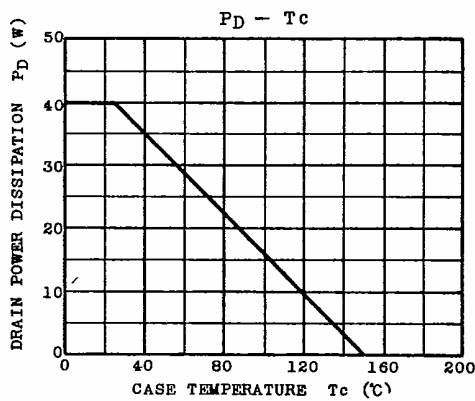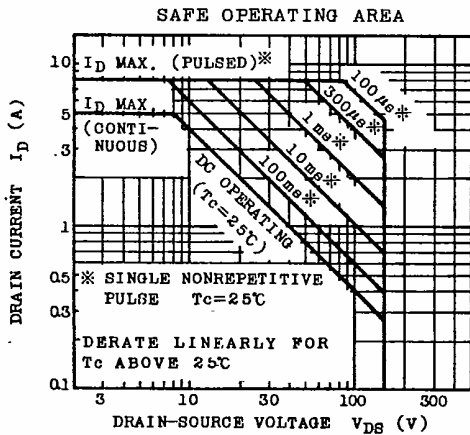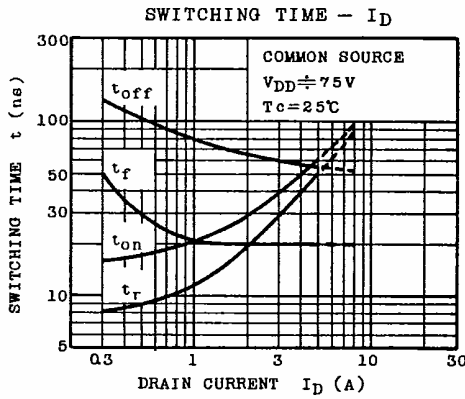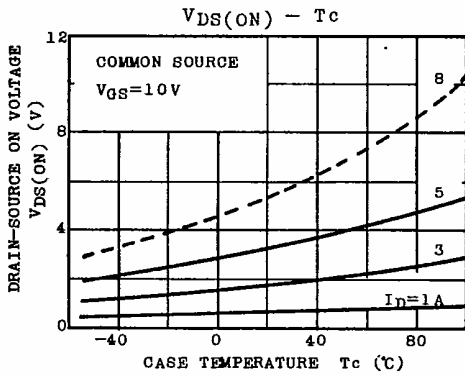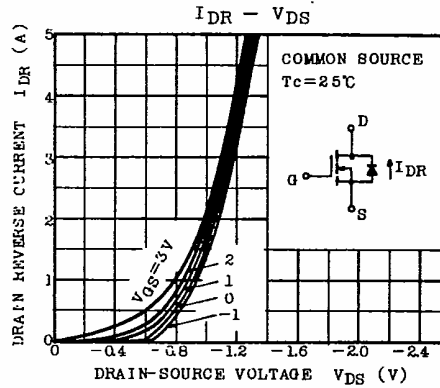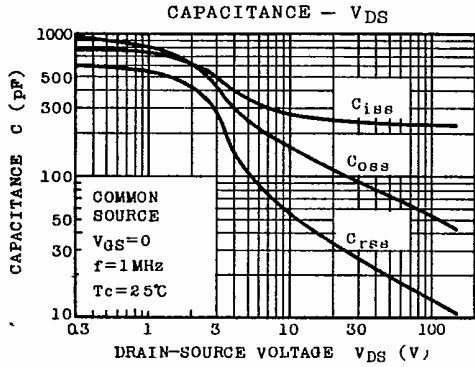

TOSHIBA CORPORATION