

SIMM Series Input Modules

- * 6.2 mm wide and 65 mm deep
- * DIN Rail mounted
- * LED input status indicator
- * Bridges enable quick linking of common voltage
- * Identification zone on front face
- * IP20



Part numbers

	84145061	84145062	84145064	84145066	84145071
Input Characteristics (at ambient 25 C°)					
Nominal voltage	24Vac/dc	24Vac/dc	120	240	5 - 28
Operating voltage range	19.2-30Vac/dc	19.2-30Vac/dc	95-121Vac/dc	195-253Vac/dc	19.2-30Vac/dc
Max input current	20 mA	20 mA	5 mA	5 mA	20 mA
Output characteristics (at ambient 25 C°)					
Max Voltage	30Vac/36Vdc	30Vac/36Vdc	30Vac/36Vdc	30Vac/36Vdc	30Vac/36Vdc
Max current	50 mA	50 mA	50 mA	50 mA	50 mA
General characteristics					
Operating temperature range	-25 to 60°C	-25 to 60°C	-25 to 60°C	-25 to 60°C	-25 to 60°C
Storage temperature range	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C
Turn-On time	8 ms	8 ms	8 ms	8 ms	8 ms
Turn-Off time	10 ms	10 ms	10 ms	10 ms	10 ms
Switching frequency	10 Hz	10 Hz	10 Hz	10 Hz	10 Hz
Mechanical Life (operations)	> 10 x 10 ⁶	> 10 x 10 ⁶	> 10 x 10 ⁶	> 10 x 10 ⁶	> 10 x 10 ⁶
Electrical Life (number of operation)	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶
Weight	1.23 oz	1.23 oz	1.23 oz	1.23 oz	1.23 oz
Contact Material	AgSnO2 gold plated				
Contact Arrangement	SPDT	SPDT	SPDT	SPDT	SPST (N.O.)



Note: Exceeding the value given for the output relay current will remove the gold plating

from the contacts and therefore we cannot guarantee correct operation at low currents.

Dimensions:


SPDT

SPST

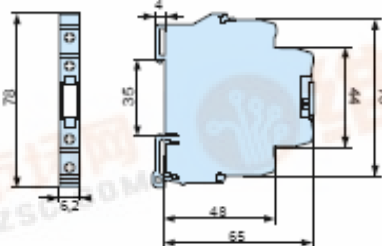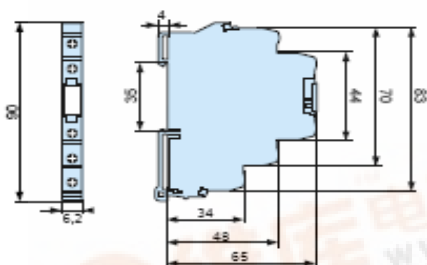

Wiring Diagram and Thermal Curves:

84145061 / 062 / 064 / 066



84145071



84145050

Front Panel marker (88 per bag)



84145051

2 Pole "Common" Jumper



84145052

10 position jumper - Blue



84145053

10 position jumper - Red



SIMM Series Output Modules

- * 6.2 mm wide and 65 mm deep
- * DIN Rail mounted
- * LED input status indicator
- * Bridges enable quick linking of common voltage
- * Identification zone on front face
- * IP20



Part numbers

	84145001	84145004	84145005	84145010	84145011	84145015
Input Characteristics (at ambient 25 C°)						
Nominal voltage	24Vdc	110Vac/dc	230Vac	5Vdc	24Vdc	230Vac
Operating voltage range	10-44Vdc	70-130Vac/dc	90-230Vac	4-5.5Vdc	10-44Vdc	90-230Vac
Max input current	6 mA	7 mA	8.5 mA	6 mA	6 mA	7mA
Drop out voltage	5Vdc	30Vac/dc	40Vac	2Vdc	3Vdc	40Vac

Output Characteristics (at ambient 25 C°)

Operating voltage range	5-48Vdc	5-48Vdc	5-48Vdc	5-48Vdc	5-48Vdc	5-48Vdc
Max current	0.5A	0.5A	0.5A	2A	2A	2A
Output Type	Transistor	Transistor	Transistor	Transistor	Transistor	Transistor

General Characteristics

Operating temperature range	-20 to 60°C	-20 to 60°C	-20 to 60°C	-20 to 60°C	-20 to 60°C	-20 to 60°C
Storage temperature range	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C
Turn-On time	20 us	30 ms	45 ms	1 ms	1 ms	1 ms
Turn-Off time	100 us	20 ms	15 ms	5 ms	5 ms	10 ms
Switching frequency	1k Hz	10 Hz	10 Hz	10 Hz	10 Hz	10 Hz
Weight	1.13 oz	1.13 oz	1.13 oz	1.06 oz	1.06 oz	1.06 oz

Part numbers

	84145020	84145021	84145024	84145025	84145031
Input Characteristics (at ambient 25 C°)					
Nominal voltage	5Vdc	24Vdc	110Vac/dc	230Vac	24Vdc
Operating voltage range	4-6.2Vdc	10-44Vdc	70-130Vac/dc	140-250Vac	10-44Vdc
Max input current	6mA	6mA	6mA	7mA	6 mA
Drop out voltage	2Vdc	3Vdc	35Vac/dc	80Vac	3Vdc

Output Characteristics (at ambient 25 C°)

Operating voltage range	24-250Vac	24-250Vac	24-250Vac	24-250Vac	24-250Vac
Max current	0.5A	0.5A	0.5A	0.5A	1A
Output Type	Triac	Triac	Triac	Triac	Triac

General Characteristics


Operating temperature range	-20 to 60°C	-20 to 60°C	-20 to 60°C	-20 to 60°C	-20 to 60°C
Storage temperature range	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C
Turn-On time	10 ms	10 ms	10 ms	10 ms	8.33 ms
Turn-Off time	10 ms	10 ms	10 ms	10 ms	8.33 ms
Switching frequency	20 Hz	20 Hz	20 Hz	20 Hz	20 Hz
Weight	1.13 oz	1.13 oz	1.13 oz	1.13 oz	.95 oz

Derating Curves:


84145001 / 004 / 005
84145010 / 011 / 015




84145010 / 011 / 015



84145031



84145001 / 004 / 005
84145020 / 021 / 024 / 025



84145020 / 021 / 024 / 025




84145031



Dimensions:

Solid State Output:

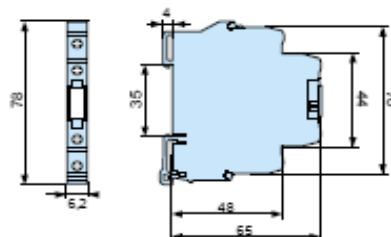

SIMM Series Output Modules


- * 6.2 mm wide and 65 mm deep
- * DIN Rail mounted
- * LED input status indicator
- * Bridges enable quick linking of common voltage
- * Identification zone on front face
- * IP20



Part numbers	84145041	84145042	84145043	84145046
Input Characteristics (at ambient 25 C°)				
Nominal voltage	24Vdc	24Vac/dc	110Vac/dc	230Vac
Operating voltage range	19.2-30Vdc	19.2-30Vac/dc	95-125Vac/dc	195-253Vac/dc
Max input current	20 mA	20 mA	5 mA	6
Output Characteristics (at ambient 25 C°)				
Operating voltage range	1-250Vac	1-250Vac	1-250Vac	1-250Vac
Max current	6A	6A	6A	6A
General Characteristics				
Operating temperature range	-25 to 60°C	-25 to 60°C	-25 to 60°C	-25 to 60°C
Storage temperature range	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C
Turn-On time	8 ms	8 ms	8 ms	8 ms
Turn-Off time	10 ms	10 ms	10 ms	10 ms
Switching frequency	10 Hz	10 Hz	10 Hz	10 Hz
Mechanical Life (operations)	> 10 x 10 ⁶	> 10 x 10 ⁶	> 10 x 10 ⁶	> 10 x 10 ⁶
Electrical Life (number of operation)	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶	6 x 10 ⁶
Weight	1.23 oz	1.23 oz	1.23 oz	1.23 oz
Contact Material	AgSnO ₂			
Contact Arrangement	SPDT	SPDT	SPDT	SPDT


Dimensions:

Relay Output:

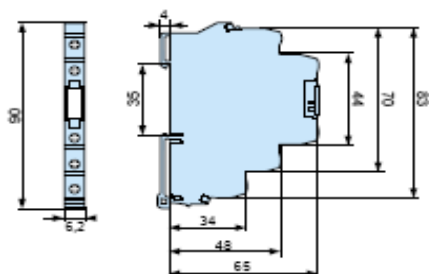

Wiring Diagram and Thermal Curves:

84145041 / 042 / 043 / 046



Accessories

84145050

Front Panel marker (88 per bag)



84145052

10 position jumper - Blue



84145051

2 Pole "Common" Jumper



84145053

10 position jumper - Red



- 20 A in a case only 17.5 mm wide
- Service life > 5 million operations at full load
- Silent operation
- Functions: contactor – impulse relay – day/night contactor
- Clips onto a 35 mm DIN rail
- UL/©UL (listed) approval pending
- NF-USE label pending
- “CE” / Low Voltage Directive conformity

Operating principles

Contactor

The contactor output is closed when the control voltage is present at the control input terminals.
The contactor output is open when there is no voltage at the control input terminals.
The LED is lit when the output is active.

Impulse relay

The impulse relay output changes state on each impulse at the control input terminals, and remains in that state between each impulse. The output changes state on the rising edge of the control state change.
The pushbutton on the front can be used to select an operating mode:
Automatic (LED lit): Impulse relay function (Auto)
Forced operation (LED flashing): output closed (ON)
Stop (LED not lit): output open (OFF)

Day/night contactor

The contactor output is closed when the control voltage is present at the control input terminals.
The contactor output is open when there is no voltage at the control input terminals.
The pushbutton on the front can be used to select an operating mode:
Automatic (LED lit): Day/night contactor function (Auto)
Forced operation (LED flashing): output closed (ON)
When the control changes state, the day/night contactor reverts to automatic mode.
Stop (LED not lit): output open (OFF)

Conformity with standards

IEC/EN 60947-4-3 (industrial environment)
IEC/EN 60669-2-1 (domestic environment)
IEC/EN 60601-1 (medical environment)
IEC/EN 60947-7-1 (connection for industrial env.)
IEC/EN 60998-2-1 (connection for domestic env.)


Insulation coordination:

Installation category: 3
Degree of pollution: 3
According to IEC 60664-1: 4KV/3

Breakdown voltage according to IEC/EN60669-2-1:
2 KV/1Min / 1mA / 50 Hz

Insulation resistance according to IEC/EN60669-2-1:
> 5MΩ/500VDC / 1Min

Vibrations according to IEC/EN60068-2-6: frequencies: 10 to 55Hz
amplitude: 0.35 mm



Part numbers (and voltages)

Contacteur control ~	84 138 001
Contacteur control ∴	84 138 000
Impulse relay control ~	84 138 101
Day/night contacteur control ∴	84 138 201


Input characteristics

Voltage	90...260 V a	0...32 V c
Frequency	50 / 60 Hz	
Thresh- OFF control	0 to 46 V ~	0 to 1 V ∴
olds ON control	76 to 260 V ~	4 to 32 V ∴
Minimum duration of the control	50 ms	50 ms


Output characteristics

Voltage	90...260 V ~
Max. current	20 A in AC1 / AC51 / AC7a
Overload current 20 A	AC-51 : 1,25 x I _e – 60s : 50 - 30 (IEC 60947-4-3)
Min. current	100 mA in AC1 / AC51 / AC7a
Frequency	50 / 60 Hz
Contact	N.O.
Number of operations	> 5 000 000
Leakage current	< 5 mA
Acoustic noise in steady state	< 35 dB at 1 m
noise on switching	< 50 dB at 0.5 m
Terminal block clamping capacity:	2 x 1.5 mm ² with ferrule 2 x 2.5 mm ² without ferrule 1 x 4 mm ² without ferrule
Terminal tightening torque	1 Nm max. M3 screw (IEC60947-1)
Operating temperature	-5 °C to +55 °C
Storage temperature	-40 °C to +85 °C
Relative humidity	90 to 95 % without condensation
Casing material	Self-extinguishing
Degree of protection	IP 50 casing
(according to IEC 60529)	IP 20 terminal block
Weight (g)	70 approx.

Connection

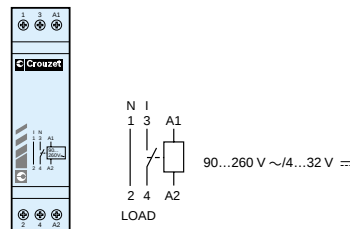

Dimensions

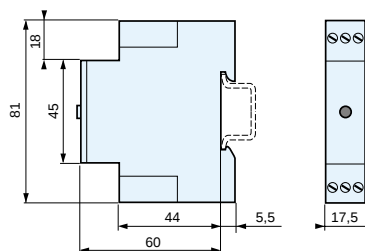

To order, specify:

Standard products

1

Part number
Example : Solid state relays - RHP - 84 138 001

- For controlling three-phase supplies
- Controls two or three phases of the supply
- Applied to star or delta-connected two-phase resistances with neutral not connected
- Rating 25 A and 40 A
- Input voltages from 24 to 280 V and 36 to 530 V
- Back-to-back SCRs
- Zero voltage switching
- Input to output insulation voltage: 4000 V
- Protection by RC filter
- UL - cUL approval and CE marking

Output specifications

	24-280	24-280	36-530
Voltage range (Vrms max)	24-280	24-280	36-530
Peak voltage (t=1 min.) (Vpeak)	600	600	1200
Maximum current (Vpeak)	25	40	40
Maximum current (mAms)	7	7	7
Minimum current (mAms)	100	100	100
Max. 1-cycle surge T=25°C (A peak)	250	500	500
Max. 1-second surge T=25°C (A peak)	67	145	135
On-state voltage drop at Imax and T=25°C (Vpeak)	1.6	1.6	1.6
I ² t (t=10ms) A ² s	260	1260	1260
Thermal resistance - Junction to casing (°C/W)	1.5	0.25	0.25
Static (off-state) dv/dt (Vμs)	500	500	500
Supply frequency range (Hz)	47-63	47-63	47-63
cos φ (Zero voltage)	> 0.5	> 0.5	> 0.5


Input specifications

Input voltage(V)	4-15
Drop-out voltage (V -)	1
Maximum current (at Vmax) (mA)	32
Response time (close)	
Zero voltage switching (ms)	10
Instantaneous switching (ms)	0,1
Response time (open)	
Zero voltage switching (ms)	10
Instantaneous switching (ms)	10

Characteristics

Operating temperature (°C)	-20 à +80
Storage temperature (°C)	-40 à +100
Input to output insulation voltage (Vrms)	4000
Breakdown voltage (Vrms)	2500
Input/output capacitance (pF)	8
Material	Casing
	Self-extinguishing (UL 94 V0)
	Baseplate
	Aluminium
Weight (g)	450

Equivalent circuits

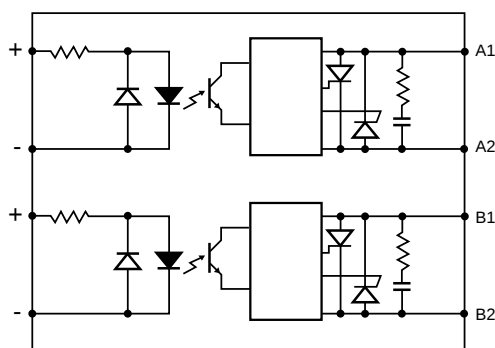

Part numbers

Two-phase relays 25 A

Switching	Output voltage	Input voltage	Connection diagram	
Zero voltage	24 - 280 V ~	4 - 15 V -	B	84 130 210
Instantaneous	24 - 280 V ~	4 - 15 V -	B	84 130 211



Two-phase relays 40 A

Switching	Output voltage	Input voltage	Connection diagram	
Zero voltage	24 - 280 V ~	4 - 15 V -	D	84 130 230
Instantaneous	24 - 280 V ~	4 - 15 V -	D	84 130 231
Zero voltage	36 - 530 V ~	4 - 15 V -	D	84 130 240
Instantaneous	36 - 530 V ~	4 - 15 V -	D	84 130 241
Zero voltage	24 - 280 V ~	4 - 15 V -	C	84 130 250
Instantaneous	24 - 280 V ~	4 - 15 V -	C	84 130 251
Zero voltage	36 - 530 V ~	4 - 15 V -	C	84 130 260
Instantaneous	36 - 530 V ~	4 - 15 V -	C	84 130 261
Zero voltage	24 - 280 V ~	4 - 15 V -	B	84 130 270
Instantaneous	24 - 280 V ~	4 - 15 V -	B	84 130 271
Zero voltage	36 - 530 V ~	4 - 15 V -	A	84 130 280
Instantaneous	36 - 530 V ~	4 - 15 V -	A	84 130 281

Accessories (see catalogue pages 4/30 to 4/32)

Heatsinks	
Heat transfer compound	18 373 112
DIN rail adaptor	26 532 764
Quick-blow fuses	

Thermal dissipation curves

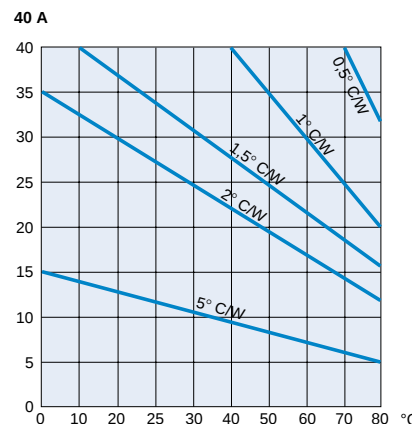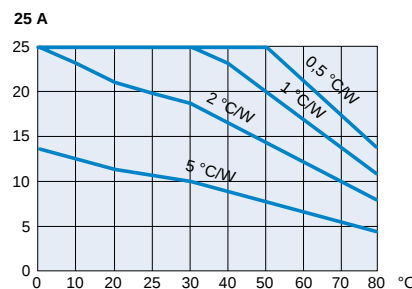

To order, specify:

Standard products

1 Part number


2 Accessory

Example: Two-phase solid state relay 25 A 84 130 210 - DIN rail adaptor 26 532 764


Standard products,
non stocked

Dimensions


A

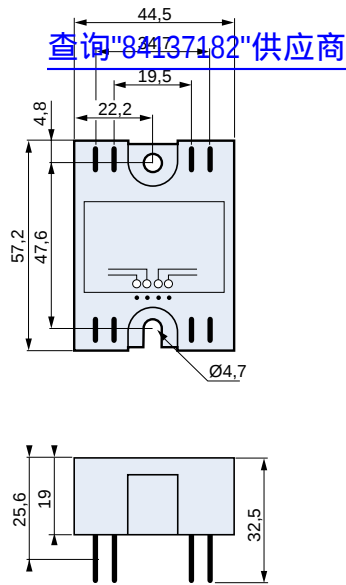


B

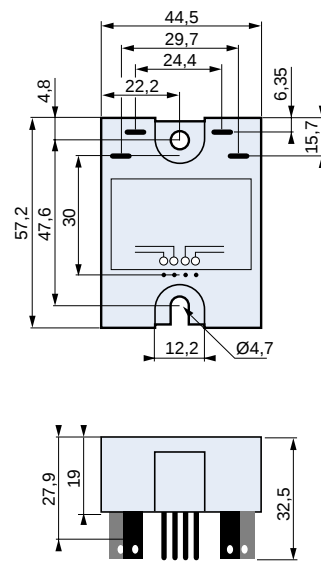

C

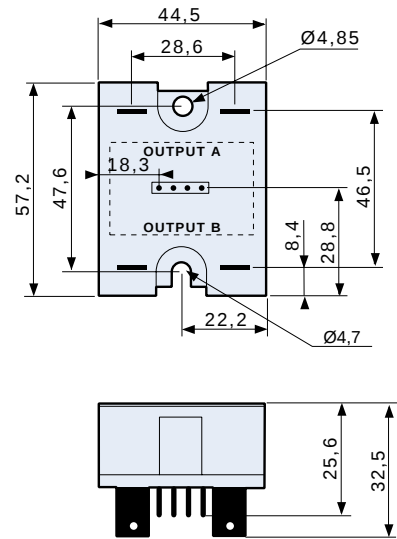

D

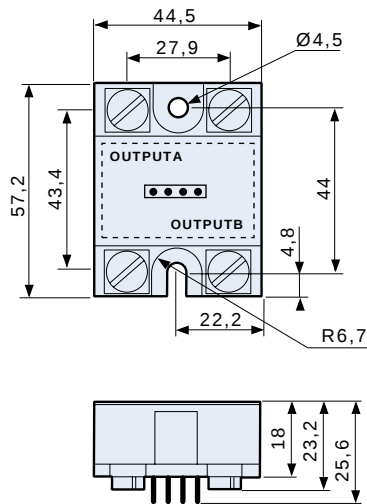



查询"84137182"供应商


For accessories see page 4/10

- For controlling three-phase supplies
- Controls two or three phases of the supply
- Used on star or delta-connected two-phase resistors with neutral not connected
- Rating 25 A
- Output voltages from 24 to 280 V
- Back-to-back SCRs
- Zero voltage switching
- Input to output insulation voltage : 4000 V
- Protection by RC filter
- UL/CSA and CE approved


To order

Versions	Rating	Output voltages	Input voltages	Peak voltages	Part number
Zero voltage switching	25 A	24 • 280 V ~	4 • 15 V ≡	600 V	84 130 210
Instantaneous switching	25 A	24 • 280 V ~	4 • 15 V ≡	600 V	84 130 211
Zero voltage switching	40 A	24 • 280 V ~	4 • 15 V ≡	600 V	84 130 230
Instantaneous switching	40 A	24 • 280 V ~	4 • 15 V ≡	600 V	84 130 231

Thermal curves

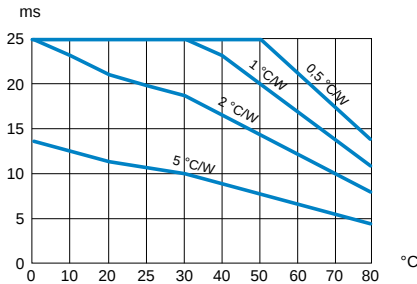

Dimensions

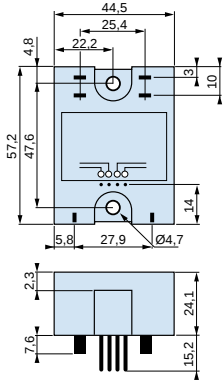

Accessories for solid state relays

Heatsinks


To order

Range	Thermal resistance	Length	Weight	Part number
1 phase G, GA5, GT, GF Material : black anodised aluminium	2 °C/W	L = 70 mm	260 g	26 532 760
1 phase G, GA5, GT, GF Material : black anodised aluminium	3 °C/W	L = 58 mm	250 g	26 532 761
3 phases or 2 x 1 phase 2 x G, GA5, GT, GF 1 x GA0, GA3 Material : black anodised aluminium	0.7 °C/W	L = 75 mm	655 g	26 532 762
1 phase G, GA5, GT, GF, GN Material : black anodised aluminium	2 °C/W	L = 50 mm	150 g	26 532 758


Adaptors for panel mounting (lot of 4)

For heatsink	26 532 758	26 532 801
--------------	------------	------------


26 532 760




26 532 761




26 532 762




26 532 758



26 532 801



For other products, consult our specialist catalogues... For other products, consult our specialist catalogues...




Characteristics	Weight
Suitable for use with heatsinks 26 532 760, 26 532 761 and 26 532 762	55 g

To order



Part number
26 532 764

Heat transfer compound




Material	Weight
silicon/zinc oxide paste	20 g

To order



Part number
18 373 112

Thermal interfaces




Thermstrate® thermal interface pads

Characteristics	Part number
- For G, GA5, GF and GT ranges	26 532 720
- For the 3-phase GA0 range and the GA3 range	26 532 721

To order





Solid state relay protection





Type	Part number
Varistor	
GA5 - G (24 - 280 V ~)	In lots of 10 26 532 740
GA3 - G (36 - 530 V ~)	In lots of 10 26 532 741
and 48 - 660 V ~)	
GA0	Single 26 532 742
Fuses for GMS relays	
GMS 3 A and C 4	In lots of 10 26 532 730
GMS 5 A	In lots of 10 26 532 731

To order

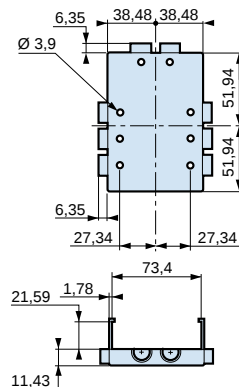


Material	Part number
polycarbonate UL 94 V0 Fits GA3 range	26 532 796

To order

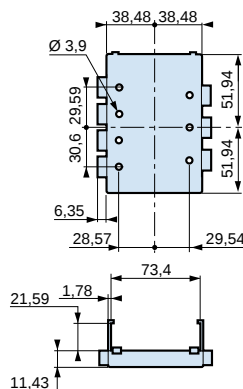

Material	Part number
polycarbonate UL 94 V0 Fits GA0 range	26 532 797

To order



Material	Weight	Part number
polycarbonate UL 94 V0	5 g	26 532 798
Fits G, GA5, GF and GT ranges		

To order



For other products, consult our specialist catalogues... For other products, consult our specialist catalogues...

- Current from 10 to 90 A
- Output voltages from 24 to 660 V~
- Back-to-back SCRs
- Input voltage 90-280 V ~ ∞ or 3-32 V ∞
- Peak voltage up to 1200 V
- Zero voltage or instantaneous switching
- Input to output insulation voltage: 4000 V
- Protection by RC filter
- UL recognised and CSA approved

Thermal curves

The graph illustrates the power dissipation characteristics of a device under different thermal conditions. The x-axis represents both on-state current (A) and ambient temperature (°C), ranging from 0 to 80. The y-axis represents both dissipated power (W) and baseplate temperature (°C), ranging from 0 to 15 W and 100 to 120 °C. Four lines are plotted, representing different thermal resistances: 3°C/W, 5°C/W, 10°C/W, and 'No heatsink'. The lines show that power dissipation increases linearly with on-state current and decreases linearly with ambient temperature. The 'No heatsink' line shows the highest power dissipation for a given current, while the 3°C/W line shows the lowest.

Figure 10 is a line graph showing the relationship between Dissipated power (W) and Baseplate temperature (°C). The y-axis represents Dissipated power (W) from 0 to 55 in increments of 5. The x-axis represents Baseplate temperature (°C) from 0 to 80 in increments of 5. A vertical line at 40°C divides the graph into two regions: 'On-state current' (left) and 'Ambient temperature' (right). Three lines represent different thermal resistances: 0.5°C/W, 1°C/W, and 3°C/W. In the 'On-state current' region, power increases linearly from 0 W at 0°C to 55 W at 40°C. In the 'Ambient temperature' region, power decreases linearly from 55 W at 40°C. The 0.5°C/W line reaches 0 W at 90°C, the 1°C/W line at 110°C, and the 3°C/W line at 130°C.

Baseplate temperature (°C)	Power (W) for 0.5°C/W	Power (W) for 1°C/W	Power (W) for 3°C/W
0	0	0	0
40	55	55	55
90	0	33	21
110	-	0	9
130	-	-	0

The graph illustrates the relationship between dissipated power and both on-state current and ambient temperature for the 2N3866 tube. The y-axis represents dissipated power in Watts (W), ranging from 0 to 112. The x-axis is split into two sections: on-state current in Amperes (A) from 0 to 65, and ambient temperature in degrees Celsius (°C) from 10 to 80. A vertical line at 65A marks the maximum current. Three lines originate from the point (65A, 112W), representing different thermal conditions: 25°C/W (steepest decline), 1°C/W (moderate decline), and 2°C/W (shallowest decline).

Parameter	Value
Maximum On-state Current	65 A
Maximum Dissipated Power (at 65A)	112 W
Thermal Resistance Values	25°C/W, 1°C/W, 2°C/W

Figure 1 is a graph showing the power dissipation characteristics of the device. The y-axis represents Dissipated power (W) from 0 to 135. The x-axis has two scales: On-state current (A) from 0 to 80 and Ambient temperature (°C) from 0 to 80. The graph is divided into two regions: On-state current (A) and Ambient temperature (°C). The power dissipation is 0 W at 0 A and 135 W at 80 A. The power dissipation is 0 W at 0 °C and 135 W at 80 °C. The graph shows four lines representing different power dissipation characteristics: 0.6°C/W, 1°C/W, 2°C/W, and 1°C/W.



查询"84137062"供应商

For accessories see page 4/9 and 4/10
For dimensions see page 4/8


- TRIAC low-cost solid state relay
- Input voltage 3-32 V $\sim$ or 90-280 V $\sim$
- Peak voltage: 600 V
- UL/CSA approved
- Certain models are VDE approved
- Input to output insulation voltage: 4000 V
- Protection by RC filter

To order


Versions	Rating	Output voltages	Input voltages	Peak voltages	Part number
Zero voltage switching	10 A	24 • 280 V $\sim$	3 • 32 V $\sim$ 90 • 280 V $\sim$	600 V 600 V	84 061 231 84 061 233
Zero voltage switching	25 A	24 • 280 V $\sim$	3 • 32 V $\sim$ 90 • 280 V $\sim$	600 V 600 V	84 061 431 84 061 433
Faston tag connectors					
Zero voltage switching	10 A	24 • 280 V $\sim$	3 • 32 V $\sim$	600 V	84 061 531
	25 A	24 • 280 V $\sim$	90 • 280 V $\sim$	600 V	84 061 631
EMC level 3	10 A	24 • 280 V $\sim$	3 • 32 V $\sim$	600 V	84 131 900
	25 A	24 • 280 V $\sim$	90 • 280 V $\sim$	600 V	84 131 910

Thermal dissipation curves


GA5 range - 10 A

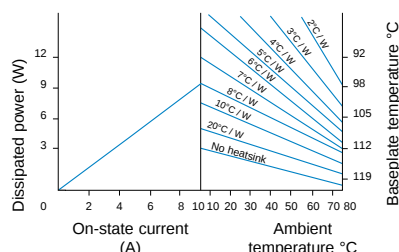

GA5 range - 25 A

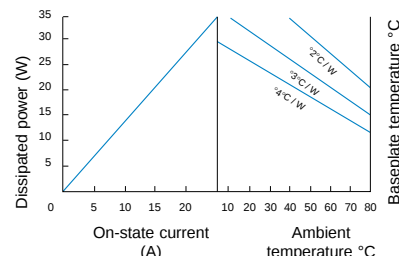

GAO range three-phase motor reversing relay



For accessories see page 4/9 and 4/10


- Reverses rotation of three-phase motors
- Output voltage 24-480 V~
- Input voltage 3-32 V $\sim$
- Reversal delay : 100ms
- Interlock against simultaneous actuation in both directions
- Back-to-back SCRs
- Input to output insulation voltage: 5000 V $\sim$
- Protected by RC filter and overvoltage limiter
- Direction of rotation displayed by 2 green LEDs

To order

Rating	Output voltage	Input voltage	Part number
25 A	24 • 480 V $\sim$	3 • 32 V $\sim$	84 067 441


Thermal curves

GAO range - 25 A

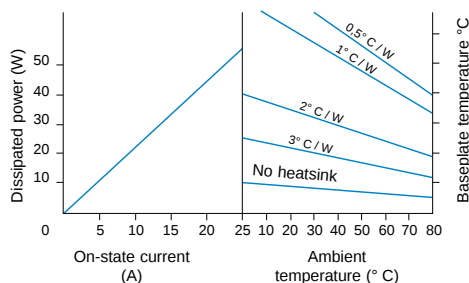

Dimensions

(General tolerances ± 0.5)

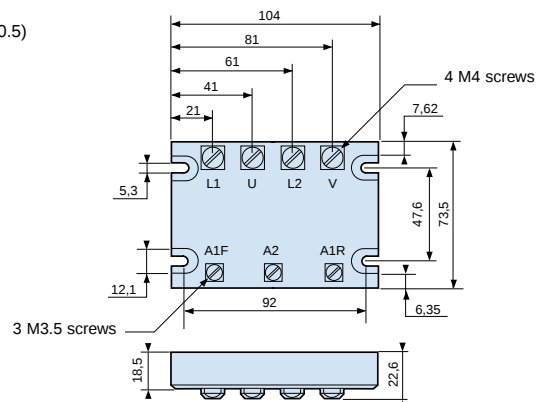

For other products, consult our specialist catalogues... For other products, consult our specialist catalogues...



查询"84137182"供应商

For accessories see page 4/9 and 4/10
For dimensions see below


- Solid state relay for DC applications
- FET output - 10 A, 15 A, 30 A
- Very low leakage current (<10μA)
- Very low on-state resistance (minimises heating)
- Input to output insulation voltage : 1500 V
- Protection against polarity reversal

To order


Rating	Output voltages	Input voltages	Part number
10 A	1 • 200 V ~	3 • 32 V ~	84 062 291
15 A	1 • 100 V ~	3 • 32 V ~	84 062 381
30 A	1 • 50 V ~	3 • 32 V ~	84 062 571

Thermal curve


GF range - 10 A

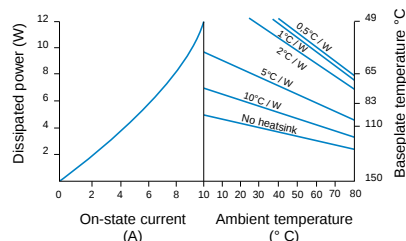

GF range - 15 A

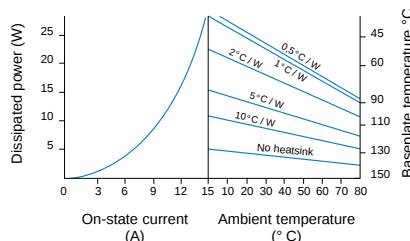

GF range - 30 A

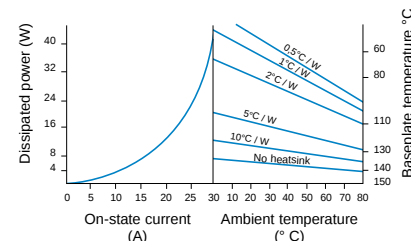

GT range



For accessories see page 4/9 and 4/10


- Solid state relay for DC applications
- Transistor output - 10 A
- Response time < 25μs
- Input voltage 3-32 V ~
- UL/CSA approved
- Input to output insulation 4000 V ~

To order

Rating	Output voltage	Input voltage	Part number
10 A	3 • 60 V ~	3 • 32 V ~	84 063 261


Thermal curve

GT range - 10 A

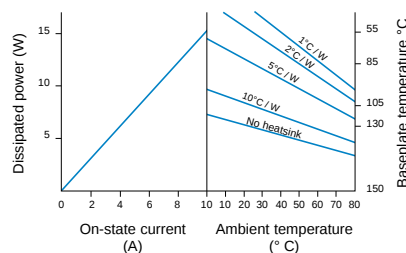

Dimensions (General tolerances ± 0.5)

G - GA5 - GF and GT ranges - 15 A

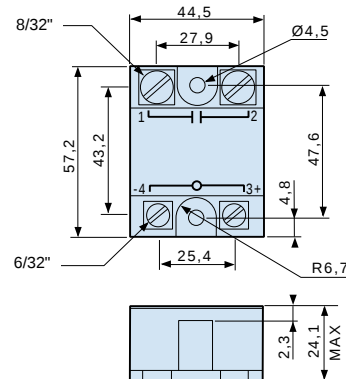


For other products, consult our specialist catalogues... For other products, consult our specialist catalogues...

Solid state I/O modules represent a reliable control system solution which is simple to install for interfacing different voltage levels.

Output modules

Output modules can be used to control AC or DC loads using DC low-voltage logic input signals.

They can control loads of up to 5 A, and can be used over a very wide voltage range, from 5 to 48 VDC and from 120 to 240 VAC.




The control input for these modules is compatible with standard logic levels (TTL, CMOS, etc).

This makes them ideally suited to act as an interface and isolation device between one digital command (microprocessor or other), a medium-power circuit (heatsink, motor, etc), a preactuator (contactors, solenoid valves) or a signalling device (indicator lamps, audible alarms, etc).

Input modules

Input modules can be used to determine the status of an AC or DC load by producing a low-voltage logic output signal.




Practical

Clever use of colour means the function of an I/O can be identified immediately, greatly simplifying module identification.

Colours




- white : DC input module
- yellow : AC input module
- red : DC output module
- black : AC output module

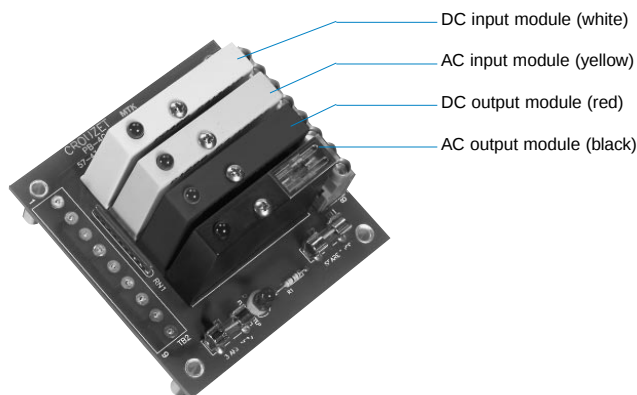

Solid state I/O modules

Solid state input modules

To order



Range	Type	Output voltages	Input voltages	Part number
Standard range (15.24 mm)				
	IAC5	5 V $\equiv$	120 V $\sim$	84 110 110
	IAC5A	5 V $\equiv$	240 V $\sim$	84 110 111
	IDC5	5 V $\equiv$	5 - 28 V $\equiv$	84 110 210
	IDC5N	5 V $\equiv$	12 - 48 V $\equiv$	84 110 212
	IAC24A	24 V $\equiv$	240 V $\sim$	84 110 131
43.2 x 31.8 x 15.2 mm				
M range				
	MIAC5	5 V $\equiv$	120 V $\sim$	84 111 110
	MIACEA	5 V $\equiv$	240 V $\sim$	84 111 111
	MIDC5	5 V $\equiv$	5 - 28 V $\equiv$	84 111 210
	MIDC5N	5 V $\equiv$	12 - 48 V $\equiv$	84 111 212
43.2 x 25.4 x 10.2 mm				
SM range				
	SMIAC5	5 V $\equiv$	120 V $\sim$	84 113 110
	SMIAC5A	5 V $\equiv$	240 V $\sim$	84 113 111
	SMIDC5	5 V $\equiv$	5 - 28 V $\equiv$	84 113 210
	SMIDC5N	5 V $\equiv$	12 - 48 V $\equiv$	84 113 212
43.2 x 25.4 x 10.2 mm				

For other products, consult our specialist catalogues... For other products, consult our specialist catalogues...


- Single channel plug-in module
- Input : 5 V $\equiv$ or 24 V $\equiv$
- Output : $\sim$ TRIAC
110 V $\sim$ or 240 V $\sim$
548 V $\sim$ 52" 供应商
- Current : 3 to 5 A
- Synchronous switching
- Standard industrial casing



Types		OAC5	OAC5AH	OAC5A	ODC5	OAC24
Part numbers		84 110 310	84 110 011	84 110 311	84 110 410	84 110 330
Input characteristics (at ambient 25 °C)						
Nominal control voltage	V $\equiv$	5	5	5	5	24
Control voltage range	V $\equiv$	2.75 - 8	2.75 - 8	2.75 - 8	2.75 - 8	18 - 32
Voltage drop	V $\equiv$	1	1	1	1	1
Operating current	mA	20	20	20	18	13
Internal resistance	Ω	220	220	220	250	2000
Output characteristics (at ambient 25 °C)						
Nominal voltage		120 V $\sim$	240 V $\sim$	240 V $\sim$	5 - 48 V $\equiv$	120 V $\sim$
Operating voltage range		12 - 140 V $\sim$	24 - 280 V $\sim$	24 - 280 V $\sim$	3 - 60 V $\equiv$	12 - 140 V $\sim$
Peak voltage		400 Vpeak	600 Vpeak	600 Vpeak	60 V $\equiv$	400 Vpeak
Max leakage current		3 mArms	6 mArms	6 mArms	10 μ A	3 mArms
Static dv/dt - off-state	V/ μ s	200	200	200	—	200
Output current		3.5 Arms	5 Arms	3.5 Arms	3 A	3.5 Arms
Holding current		50 mArms	50 mArms	50 mArms	10 mA	50 mArms
Current surge (for 1 cycle in $\sim$ and 1 s in $\equiv$)		100 Apeak	100 Apeak	100 Apeak	5 A	100 Apeak
Voltage drop - on-state	V	1.6	1.6	1.6	1.5	1.6
General characteristics						
Temperature limits	Use	°C	-30 +80	-30 +80	-30 +80	-30 +80
	Stored	°C	-40 +100	-40 +100	-40 +100	-40 +100
Response time	Turn-on	ms	8.33	0.1	8.33	8.33
	Turn-off	ms	8.33	8.33	0.75	8.33
I/O isolation		V $\sim$	4000	4000	4000	4000
I/O capacity (typical)		pF	8	8	8	8
Operating frequency		Hz	47 - 63	47 - 63	$\equiv$	47 - 63


Connections

$\sim$ output module

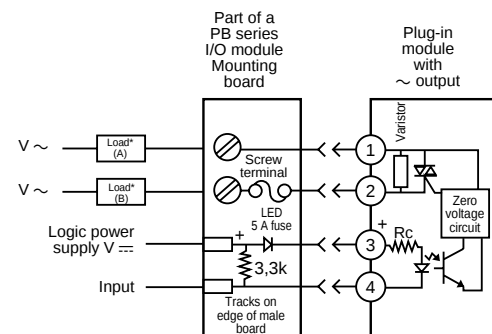

* The load may be wired on A or B.

$\equiv$ output module

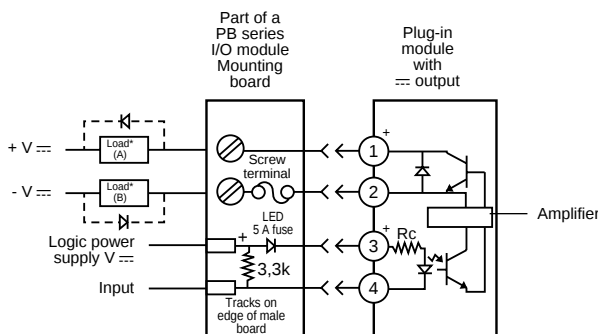


* The load may be wired on A or B. To avoid damage to the I/O module, inductive DC loads must not contain a diode.

Other information

UL approved (E46203) / CSA certified (38595)
For mounting boards, see pages 4/60 to 4/69.

查询"84137182"供应商



OAC24A	ODC24
--------	-------

84 110 331	84 110 430
------------	------------


24	24
18 - 32	18 - 32
1	1
13	13
2000	2000

240 V ~	5 - 48 V ~
24 - 280 V ~	3 - 60 V ~
600 V _{peak}	60 V ~
6 mArms	10 µA
—	—
3.5 mArms	3 A
50 mArms	10 mA
100 A _{peak}	5 A
1.6	1.5

-30 +80	-30 +80
-40 +100	-40 +100
8.33	0.025
8.33	0.05
4000	4000
8	8
47 - 63	=

Dimensions

Dimensions in mm. Tolerance : ± 0.50 .

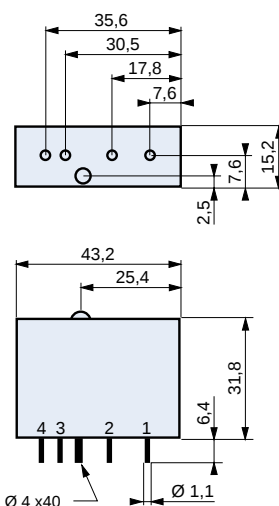

Casing colour :
 ~: Black
 ==: Red

4

To order, specify :


Standard products

1 Part number

Example : Output module - Standard range 15.24 mm - 84 110 310

Standard products,
non stocked

- Single channel plug-in module
- Input : 110 V ~, 240 V ~, 5 - 28 V $\equiv$, 12-48 V $\equiv$
- Open collector output : 5 V $\equiv$ or 24 V $\equiv$
- Standard industrial casing





Types			IAC5	IAC5A	IAC5E	IDC5	IDC5N
Part numbers			84 110 110	84 110 111	84 110 112	84 110 210	84 110 212
Input characteristics (at ambient 25 °C)							
Nominal voltage			120 V ~	240 V ~	24 V ~	5 - 28 V $\equiv$	12 - 48 V $\equiv$
Operating voltage range			90 - 140 V ~	180 - 280 V ~	18 - 36 V ~	3.3 - 32 V $\equiv$	10 - 60 V $\equiv$
Max input resistance	k Ω		28	75	2	1	2
Max input current			5 mArms	5 mArms	10 mArms	34 mA	34 mA
Current drop			2 mArms	1.5 mArms	1 mArms	1 mA	1 mA
Current authorised when not operating			2.5 mArms	2 mArms	1.5 mArms	1.5 mA	1.5mA
Voltage authorised when not operating			50 V ~	50 V ~	10 V ~	2 V $\equiv$	4 V $\equiv$
Output characteristics (at ambient 25 °C)							
Logic voltage	V $\equiv$		5	5	5	5	5
Logic voltage range	V $\equiv$		3 - 6	3 - 6	3 - 6	3 - 6	3 - 6
Max logic current	mA		16	16	16	16	16
Max I power supply output in OFF state	μ A		10	10	10	10	10
Max output transistor voltage	V $\equiv$		30	30	30	30	30
Max output transistor current	mA		50	50	50	50	50
Max leakage current	μ A		10	10	10	10	10
Residual voltage	V $\equiv$		0.2	0.2	0.2	0.2	0.2
General characteristics							
Temperature limits	Use	°C	-30 +80	-30 +80	-30 +80	-30 +80	-30 +80
	Stored	°C	-40 +100	-40 +100	-40 +100	-40 +100	-40 +100
Response time	Turn-on	ms	20	20	20	1	5
	Turn-off	ms	30	30	30	1	5
I/O isolation		V ~	4000	4000	4000	4000	4000
I/O capacity (typical)		pF	8	8	8	8	8
Operating frequency		Hz	47 - 63	47 - 63	47 - 63	$\equiv$	$\equiv$

Connections

~ input module


$\equiv$ input module

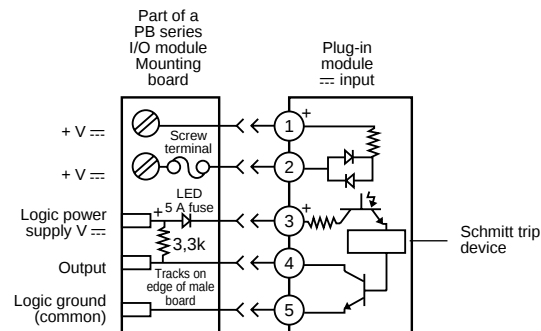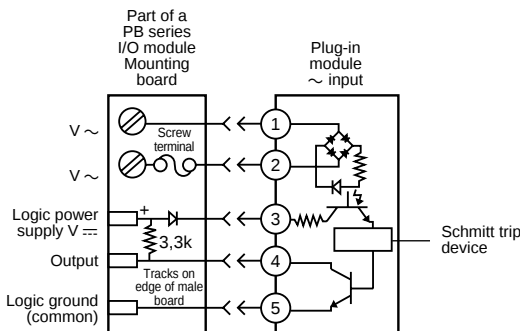

Other information

UL approved (E46203) / CSA certified (38595)
For mounting boards, see pages 4/60 to 4/69.

查询"84137182"供应商




IAC24	IAC24A	IDC24	IDC24N
84 110 130	84 110 131	84 110 230	84 110 232
120 V ~	240 V ~	5 - 28 V =	12 - 48V =
90 - 140 V ~	180 - 280 V ~	3.3 - 32 V =	10 - 60 V =
28	75	1	2
5 mArms	5 mArms	34 mA	34 mA
2 mArms	1.5 mArms	1 mA	1 mA
2.5 mArms	2 mArms	1.5 mA	1.5 mA
50 V ~	50 V ~	2 V =	4 V =
24	24	24	24
20 - 30	20 - 30	20 - 30	20 - 30
16	16	16	16
10	10	10	10
30	30	30	30
50	50	50	50
10	10	10	10
0.2	0.2	0.2	0.2
-30 +80	-30 +80	-30 +80	-30 +80
-40 +100	-40 +100	-40 +100	-40 +100
20	20	1	5
30	30	1	5
4000	4000	4000	4000
8	8	8	8
47 - 63	47 - 63	=	=

1

Dimensions

Dimensions in mm. Tolerance : ± 0.50 .

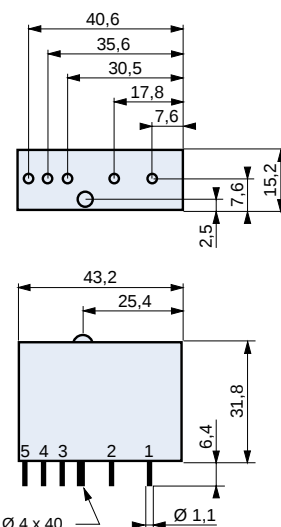

Casing colour :

~ : Yellow

= : White

4

To order, specify :


Standard products

1 Part number

Standard products,
non stocked

Example : Input module - Standard range 15.24 mm - 84 110 110

- Single channel plug-in module
- Input : 5 V $\equiv$ or 24 V $\equiv$
- Output : 110 V $\sim$ / 240 V $\sim$, 5-48 V $\equiv$
- Current : 3 to 5 A $\sim$
- Standard industrial casing



Types

Part numbers

Input characteristics (at ambient 25 °C)

		SMOAC5	SMOACAH	SMOAC5A	SMOAC5AR	SMODC5
Nominal control voltage	V $\equiv$	5	5	5	5	5
Control voltage range	V $\equiv$	2.75 - 8	2.75 - 8	2.75 - 8	2.75 - 8	2.75 - 8
Voltage drop	V $\equiv$	1	1	1	1	1
Operating current	mA	20	20	20	18	18
Internal resistance	Ω	220	220	220	250	250

Output characteristics (at ambient 25 °C)


		SMOAC5	SMOACAH	SMOAC5A	SMOAC5AR	SMODC5
Nominal voltage		120 V $\sim$	240 V $\sim$	240 V $\sim$	240 V $\sim$	5 - 48 V $\equiv$
Operating voltage range		12 - 140 V $\sim$	24 - 280 V $\sim$	24 - 280 V $\sim$	24 - 280 V $\sim$	3 - 60 V $\equiv$
Peak voltage		400 Vpeak	600 Vpeak	600 Vpeak	600 Vpeak	60 V $\equiv$
Max leakage current		3 mArms	6 mArms	6 mArms	6 mA	10 μ A
Static dv/dt - off-state	V/ μ s	200	200	200	200	—
Output current		3.5 Arms	5 Arms	3.5 Arms	3.5 Arms	3 A
Holding current		50 mArms	50 mArms	50 mArms	50 mArms	10 mA
Current surge (for 1 cycle in $\sim$ and 1 s in $\equiv$)		100 Apeak	100 Apeak	100 Apeak	100 Apeak	5 A
Voltage drop - on-state	V	1.6	1.6	1.6	1.6	1.5

General characteristics

		SMOAC5	SMOACAH	SMOAC5A	SMOAC5AR	SMODC5
Temperature limits	Use	-30 +80	-30 +80	-30 +80	-30 +80	-30 +80
	Stored	-40 +100	-40 +100	-40 +100	-40 +100	-40 +100
Response time	Turn-on	8.33	0.1	8.33	8.33	0.1
	Turn-off	8.33	8.33	8.33	8.33	0.75
I/O isolation	V $\sim$	4000	4000	4000	4000	4000
I/O capacity (typical)	pF	8	8	8	8	8
Operating frequency	Hz	47 - 63	47 - 63	47 - 63	47 - 63	$\equiv$


Connections

$\sim$ output module

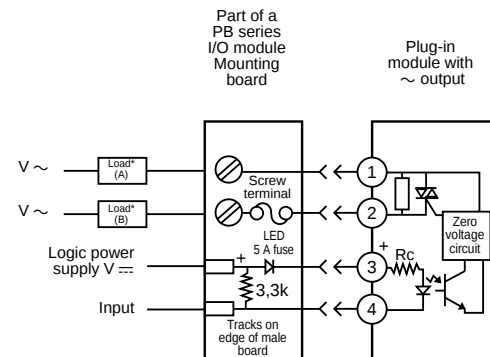

* The load may be wired on A or B.

$\equiv$ output module

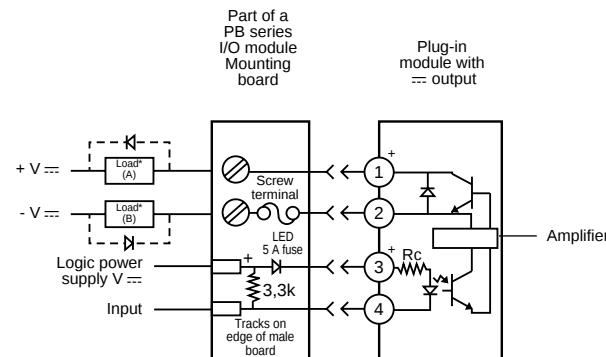


* The load may be wired on A or B. To avoid damage to the I/O module, inductive DC loads must incorporate a freewheel diode.

Other information

UL approved (E46203) / CSA certified (38595)
For mounting boards, see pages 4/74 to 4/78.

查询"84137182"供应商




SMOAC24	SMOAC24A	SMODC24
84 113 330	84 113 331	84 113 430
24	24	24
18 - 32	18 - 32	18 - 32
1	1	1
13	13	13
2000	2000	200
120 V ~	240 V ~	5 - 48 V ≐
12 - 140 V ~	24 - 280 V ≐	3 - 60 V ≐
400 Vpeak	600 Vpeak	60 V ≐
3 mArms	6 mArms	10 μA
200	200	—
3.5 Arms	3.5 Arms	3 A
50 mArms	50 mArms	10 mA
100 Apeak	100 Apeak	5 A
1.6	1.6	1.5
-30 +80	-30 +80	-30 +80
-40 +100	-40 +100	-40 +100
8.33	8.33	0.1
8.33	8.33	0.75
4000	4000	4000
8	8	8
47 - 63	47 - 63	≐

1

Dimensions

Dimensions in mm. Tolerance : ± 0.50.

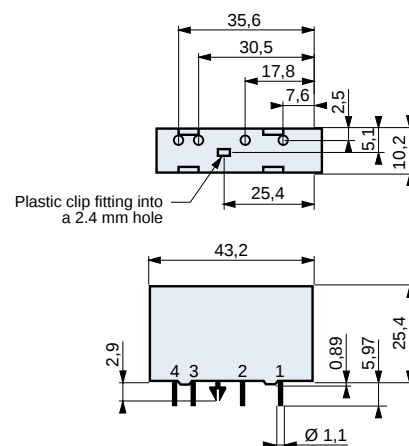

4

To order, specify :

Standard products

1 Part number


Standard products,
non stocked

Example : Output module - SM range - 84 113 310

Input modules - SMI range

- Single channel plug-in module
- Input : 24 V ~ / 110 V ~ / 240 V ~
5-28 V ~ / 12-48 V ~
- Output : open collector
- Standard industrial casing

查询"5V3-1624V"应用商



Types

Part numbers

Input characteristics (at ambient 25 °C)

	SMIAC5	SMIAC5A	SMIAC5E	SMIDC5	SMIDC5N
Nominal voltage	120V ~	240 V ~	24 V ~	5 - 28 V ~	12 - 48 V ~
Operating voltage range	90 - 140 V ~	180 - 280 V ~	18 - 36 V ~	3.3 - 32 V ~	10 - 60 V ~
Max input resistance	28 kΩ	75	2	1	2
Max input current	5 mArms	5 mArms	10 mArms	34 mA	34 mA
Current drop	2 mArms	1.5 mArms	1 mArms	1 mA	1 mA
Current authorised when not operating	2.5 mArms	2 mArms	1.5 mArms	1.5 mA	1.5 mA
Voltage authorised when not operating	50 V ~	50 V ~	10 V ~	2 V ~	4 V ~

Output characteristics (at ambient 25 °C)

	SMIAC5	SMIAC5A	SMIAC5E	SMIDC5	SMIDC5N
Logic voltage	5 V ~	5	5	5	5
Logic voltage range	3 - 6 V ~	3 - 6	3 - 6	3 - 6	3 - 6
Logic current	16 mA	16	16	16	16
Max I power supply output in OFF state	10 μA	10	10	10	10
Max output transistor voltage	30 V ~	30	30	30	30
Max output transistor current	50 mA	50	50	50	50
Max leakage current	10 μA	10	10	10	10
Residual voltage	0.2 V ~	0.2	0.2	0.2	0.2



General characteristics

	SMIAC5	SMIAC5A	SMIAC5E	SMIDC5	SMIDC5N
Temperature limits	Use °C	-30 +80	-30 +80	-30 +80	-30 +80
Stored	°C	-40 +100	-40 +100	-40 +100	-40 +100
Response time	Turn-on ms	20	20	1	5
Turn-off	ms	30	30	1	5
I/O isolation	V ~	4000	4000	4000	4000
I/O capacity (typical)	pF	8	8	8	8
Operating frequency	Hz	47 - 63	47 - 63	~	~

Connections

~ input module


== input module

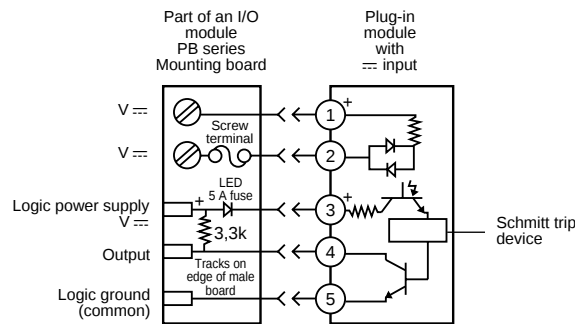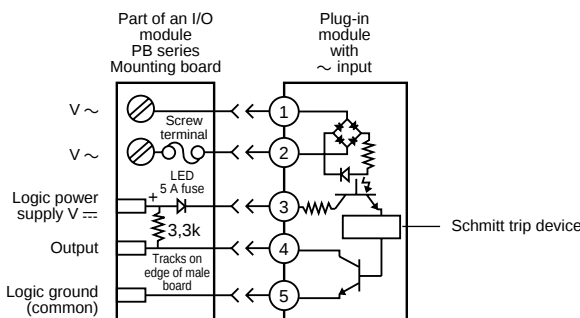

Other information

UL approved (E46203) / CSA certified (38595)
For mounting boards, see pages 4/74 to 4/78.

查询"84137182"供应商




SMIAC24	SMIAC24A	SMIDC24
84 113 130	84 113 131	84 113 230
120 V ~	240 V ~	5 - 28 V =
90 - 140 V ~	180 - 280 V ~	3.3 - 32 V =
28	75	1
5 mArms	5 mArms	34 mA
2 mArms	1.5 mArms	1 mA
2.5 mArms	2 mArms	1.5 mA
50 V ~	50 V ~	2 V =
24	24	24
20 - 30	20 - 30	20 - 30
16	16	16
10	10	10
30	30	30
50	50	50
10	10	10
0.2	0.2	0.2
-30 +80	-30 +80	-30 +80
-40 +100	-40 +100	-40 +100
20	20	1
30	30	1
4000	4000	4000
8	8	8
47 - 63	47 - 63	=

1

Dimensions

Dimensions in mm. Tolerance : ± 0.50 .

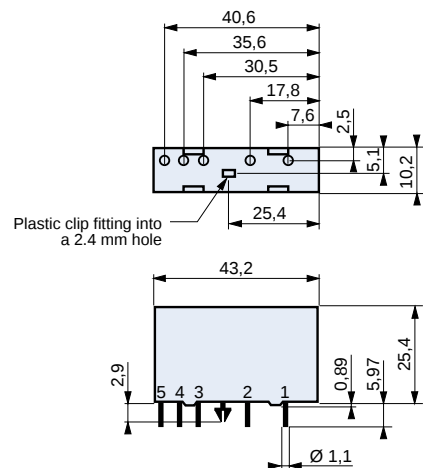

Casing colour :
~ : Yellow
= : White

4


To order, specify :

1 Part number

Example : Input module - SM range - 84 113 110

Standard products,
non stocked

- New industrial standard
- Status display LED
- Single channel plug-in module
- Input : 110 V ~ or 240 V ~
10-32 V ~ or 4-16 V ~
- Regulated output : 4.5 to 30 V ~



Types	C4IAC	C4IACA	C4IDC	C4IDCB
Part numbers	84 116 110	84 116 111	84 116 210	84 116 211

1

Input characteristics (at ambient 25 °C)

Nominal control voltage		120 V ~	240 V ~	10 - 32 V ~	4 - 16 V ~
Operating voltage range		90 - 140 V ~	140 - 280 V ~	10 - 32 V ~	4 - 16 V ~
Max input resistance		22 kΩ	75 kΩ	2 kΩ	400 Ω
Max input current	mA	14	5	20	40
Current drop	mA	3	1	1.5	1
Min turn-on current	mA	2.5	0.7	1	0.7
Min turn-on voltage		50 V ~	50 V ~	3 V ~	1 V ~


Output characteristics (at ambient 25 °C)

Logic voltage	V ~	4.5 - 30	4.5 - 30	4.5 - 30	4.5 - 30
Logic voltage range	V ~	4.5 - 30	4.5 - 30	4.5 - 30	4.5 - 30
Max logic current	mA	25	25	25	25
Max I power supply output in OFF state	μA	7	7	7	7
Max output transistor current	mA	50	50	50	50
Max leakage current	μA	10	10	10	10
Residual voltage	V ~	0.2	0.2	0.2	0.2


General characteristics

Temperature limits	Use	°C	-30 +80	-30 +80	-30 +80
	Stored	°C	-40 +100	-40 +100	-40 +100
Response time	Turn-on	ms	20	20	5
	Turn-off	ms	20	20	5
I/O isolation		V ~	4000	4000	4000
Operating frequency		Hz	47 - 63	47 - 63	~

Wiring diagram

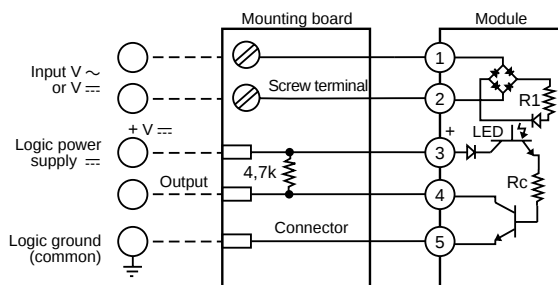

Dimensions

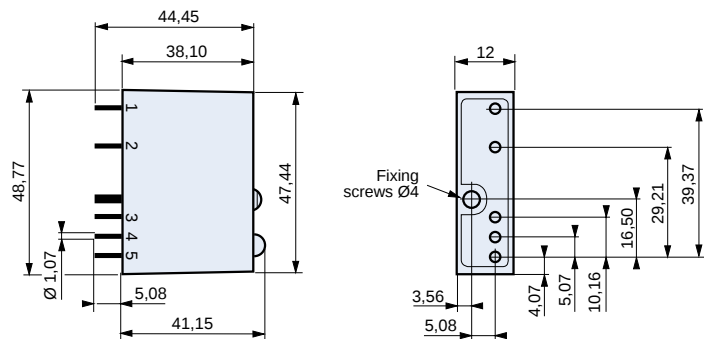

Other information	To order, specify :
UL approved (E46203) / CSA certified (38595) For mounting boards, see pages 4/79 to 4/83.	Standard products 1 Part number Example : Input module - C4 range - 84 116 110

- New industrial standard
- Status display LED
- Single channel plug-in module
- Replaceable protective fuse
- Regulated input : 4 to 32 V $\equiv$
- Output : 110 V $\sim$ or 220 V $\sim$
5-48 V $\equiv$
- Current : 3 A



Types

C4OAC

C4OACA

C4ODC

Part numbers

84 116 310

84 116 311

84 116 410

Input characteristics

Nominal control voltage	V $\equiv$	4 - 32	4 - 32	4 - 32
Voltage drop	V $\equiv$	1	1	1
Maximum current	mA	22	22	16
Input resistance		Regulated input	Regulated input	Regulated input

Output characteristics


Nominal voltage		120 V $\sim$	240 V $\sim$	5 - 48 V $\equiv$
Operating voltage range		12 - 140 V $\sim$	24 - 280 V $\sim$	5 - 60 V $\equiv$
Peak voltage		600 V	600 V	60 V $\equiv$
Max leakage current		2 mA	4 mA	10 μ A
dv/dt	V/ μ s	200	200	—
Output current		3 Arms	3 Arms	3 A
Holding current		50 mArms	50 mArms	10 mA
Current surge (for 1 cycle in $\sim$ and 1 s in $\equiv$)		100 Apeak	100 Apeak	5 A
Voltage drop - on-state	V	1.6	1.6	1.6

General characteristics


Temperature limits	Use	$^{\circ}$ C	-30 +80	-30 +80	-30 +80
	Stored	$^{\circ}$ C	-40 +100	-40 +100	-40 +100
Response time	Turn-on	ms	8.33	8.33	0.05
	Turn-off	ms	8.33	8.33	0.05
I/O isolation		V $\sim$	4000	4000	4000
I/O capacity (typical)		pF	8	8	8
Operating frequency		Hz	47 - 63	47 - 63	$\equiv$

Wiring diagrams


$\sim$ output module

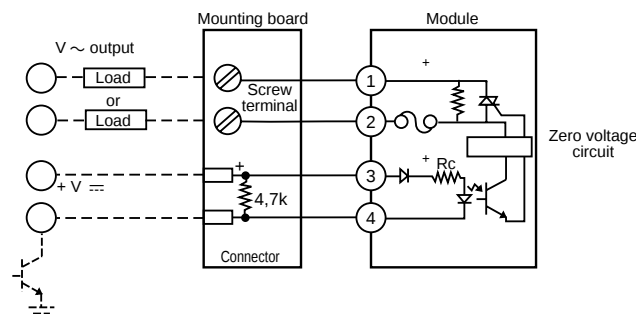

$\equiv$ output module

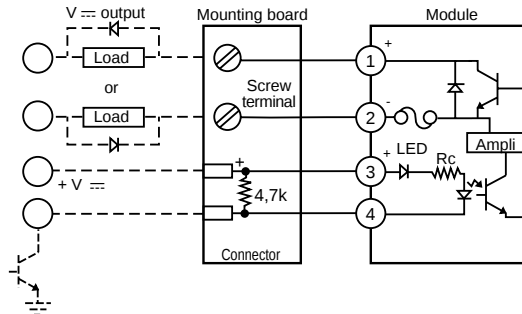

Dimensions

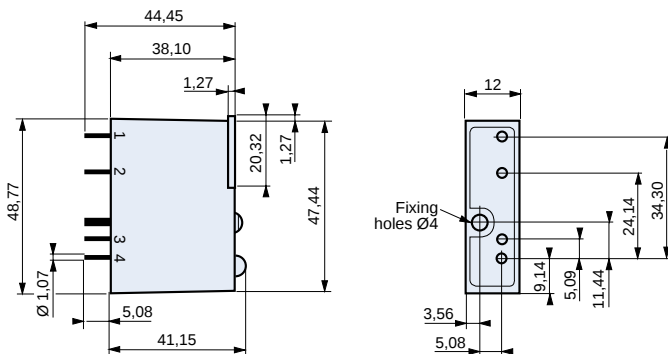

Other information

UL approved (E46203) / CSA certified (38595)
For mounting boards, see pages 4/79 to 4/83.

To order, specify :

Standard products

1 Part number

Example : Output module - C4 range -
84 116 311

- 4-channel plug-in module
- Status display LED
- Input : 24 V ~ / 110 V ~ / 240 V ~
12 to 48 V =
- Output : 5 V =
- Standard industrial casing

查询"84112110"供应商



Types	IAC5Q	IAC5AQ	IAC5EQ	IDC5Q	IDC5BQ
Part numbers	84 112 110	84 112 111	84 112 112	84 112 210	84 112 214

1

Input characteristics (at ambient 25 °C)

Nominal voltage		120 V ~	240 V ~	24 V ~	12 - 48 V =	5 - 28 V =
Operating voltage range		90 - 140 V ~	180 - 280 V ~	18 - 36 V ~	10 - 60 V =	4 - 32 V =
Max input resistance	Ω	28	75	2	2	0.5
Max input current		5 mArms	5 mArms	10 mArms	34 mA	68 mA
Current drop		2 mArms	1.5 mArms	1 mArms	1 mA	1 mA
Current authorised when not operating		2.5 mArms	2 mArms	1.5 mArms	1.5 mA	1.5 mA
Voltage authorised when not operating		50 V ~	50 V ~	10 V ~	4 V ~	2 V ~

Output characteristics (at ambient 25 °C)

Logic voltage	V =	5	5	5	5	5
Logic voltage range	V =	3 - 6	3 - 6	3 - 6	3 - 6	3 - 6
Max logic current	mA	16	16	16	16	16
Max I power supply output in OFF state	μA	10	10	10	10	10
Max output transistor voltage	V =	30	30	30	30	30
Max output transistor current	mA	50	50	50	50	50
Max leakage current	μA	10	10	10	10	10
Residual voltage	V =	0.2	0.2	0.2	0.2	0.2



General characteristics

Temperature limits	Use	°C	-30 +80	-30 +80	-30 +80	-30 +80
	Stored	°C	-40 +100	-40 +100	-40 +100	-40 +100
Response time	Turn-on	ms	20	20	20	5
	Turn-off	ms	30	30	30	5
I/O isolation		V ~	4000	4000	4000	4000
I/O capacity (typical)		pF	8	8	8	8
Operating frequency		Hz	47 - 63	47 - 63	47 - 63	=

Connections


84 112 110 - 111 - 112

84 112 210 / 214

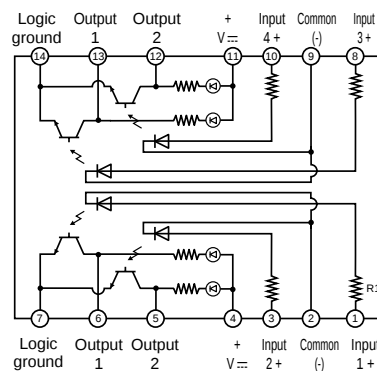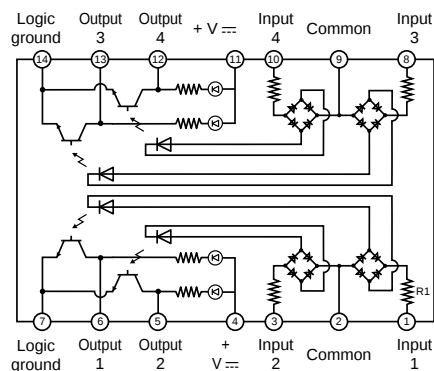

Dimensions

Dimensions in mm.
Tolerance : ± 0.50

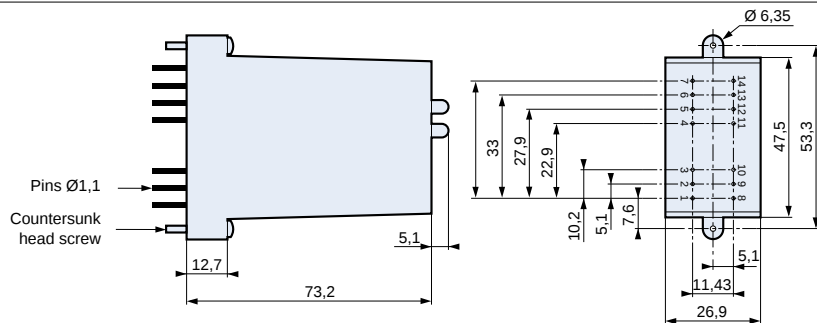

Casing colour :
~ : Yellow
= : White

Other information	To order, specify :
UL approved (E46203) / CSA certified (38595) For mounting boards, see pages 4/84 to 4/89.	Standard products Standard products, non stocked 1 Part number Example : Input module - Quad-Pack range - 84 112 110

- Complete, compact units
- DIN rail and panel mounting
- Rating: 5 A ~ or 3 A ≡
- Output voltage 12-280 V ~ or 5-48 V ≡
- Input voltage 4-32 V ≡ Regulated
- Input to output insulation voltage: 4 kV
- LED display of input status
- Replaceable protection fuse
- UL - cUL approval and CE marking



Output specifications

	Triac	Transistor
Voltage range (Vrms max)	12-280 ~	5-48 ≡
Peak voltage (t=1 min.) (V peak)	600 ~	60 ≡
Maximum off-state leakage (at Vmax and T = 25 °C)	2 mArms	10 µA
Maximum current (Arms)	5	3
Minimum current (mArms)	50	10
Max. 1-cycle surge	100	5
T=25°C (V peak)		
On-state voltage drop at Imax and T=25°C (V peak)	1.6	1.6
I ² t (t = 10 ms) (A ² s)	600	-
Static (off-state) dv/dt (V/µs)	200	n/a
Rth junction/ambient air	20.3° C/W	22.6° C/W

Input specifications

Input voltage (V)	4-32 ≡	4-32 ≡
Drop-out voltage	1V ≡	1V ≡
Maximum current (at Vmax)	22	16
Nominal input resistance	Regulated input	
Response time (close)	< 10 ms	50 µs
Response time (open)	< 10 ms	50 µs

Characteristics

Operating temperature (° C)	-30 to +80
Storage temperature (° C)	-40 to +100
Input to output insulation voltage (Vrms)	4000
Input/output capacitance (pF)	8
Replaceable protection fuse	Yes
LED display of input status of input status	Yes
Capacity of input and output terminals	with ferrule : 2 x 1.5 mm ² without ferrule : 2 x 2.5 mm ² 1 x 4 mm ²

For replacement fuses, see page 4/32

Part numbers

Zero voltage switching (output ~)


Rating	Output	Input	
3 A	5-48 V ≡	4-32 V ≡	84 130 104
5 A	12-280 V ~	4-32 V ≡	84 130 105

Instantaneous switching


Rating	Output	Input	
5 A	12-280 V ~	4-32 V ≡	84 130 108

Equivalent circuits

output ~



output ≡



Curves for temperature-dependent derating


output ~



output ≡



Dimensions

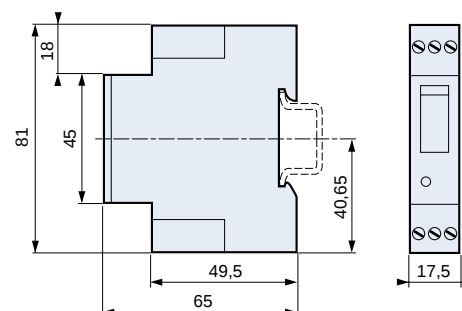

To order, specify :

Standard products

1

Part number

Example: Solid state relay - GMS range - 84 130 104

- Single phase
- Complete, compact units
- Tailor-made solution to current sinks
- DIN rail and panel mounting
- Rating: 12 and 25 A (Triac) - 25 A (SCR)
- Protection by RC filter
- Optional protection by removable varistor
- LED display of input status
- UL - cUL approval and CE marking

Output specifications

	Triac	SCR
Voltage range (Vrms max)	24-280	48-660
Peak voltage (t=1 min.) (Vpeak)	600	1200
Maximum current (A)	12 - 25	25
Maximum off-state leakage (at Vmax and T = 25 °C)	15	20
Minimum current (mA rms)	50	100
Max. 1-cycle surge T=25°C (A peak)	100 - 250	750
Max. 1-second surge T=25°C (A peak)	30 - 75	145
On-state voltage drop at Imax and T=25°C (Vpeak)	1.6	1.6
I ² t (t=10ms) A ² s	312 - 750	1250
Static (off-state) dv/dt (V/μs)	200	500
Supply frequency range (Hz)	47 to 80	47 to 80
cos φ (Zero voltage)	> 0.5	> 0.5
Rth junction/ambient air	4.9 - 3.6° C/W	2.5° C/W

Input specifications


Input voltage (V)	90-280 ~	4-32 ==
Drop-out voltage	10 Vrms	1V ==
Maximum current (at Vmax)	5.5 mA rms	12 mA
Nominal input resistance	45 kΩ	3 kΩ
Response time (close)	20 ms	0.5 cycle max.
Response time (open)	30 ms	0.5 cycle max.

For instantaneous switching models, turn-on time is less than 100 μs

Characteristics

Operating temperature (° C)	-20 to +80
Storage temperature (° C)	-40 to +100
Input to output insulation voltage (Vrms)	4000
Breakdown voltage (Vrms)	2500
Input/output capacitance (pF)	8
Material	Casing
	Baseplate
Weight (g)	Self-extinguishing (UL 94 V0)
Terminal capacity	Aluminium
	250
	Ø 2 mm max.

Dimensions

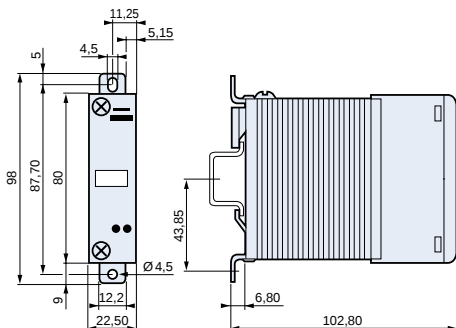

Part numbers

Zero voltage switching


Rating	Output voltage	Input voltage	Triac	SCR
12 A	24-280 V ~	180-280 V ~	84 130 100	
		4-32 V ==	84 130 101	
		90-140 V ~	84 130 150	
25 A	24-280 V ~	180-280 V ~	84 130 102	
		4-32 V ==	84 130 103	
		90-140 V ~	84 130 152	
25 A	48-660 V ~	180-280 V ~		84 130 118
		4-32 V ==		84 130 116
		90-140 V ~		84 130 158

Instantaneous switching

Rating	Output voltage	Input voltage	SCR
25 A	48-660 V ~	4-32 V ==	84 130 117


Thermal dissipation curves

GRD range - single-phase with triac




GRD range - single-phase with SCR

Zero voltage switching




Instantaneous switching




Curves for temperature-dependent derating


GRD range 22.5 mm - 12 A (Triac)



GRD range 22.5 mm - 25 A (Triac)



25 A (SCR)



To order, specify :

Standard products

1 Part number

Example: Solid state relay GMS range 22.5 mm - 84 130 100

Standard products, non stocked

- Three-phase
- Complete, compact units
- Tailor-made solution to current sinks
- DIN rail and panel mounting
- Rating: 3 x 25 A
- Back-to-back SCRs
- Protection by RC filter
- Optional protection by removable varistor
- LED display of input status
- UL - cUL approval and CE marking

Output specifications

Voltage range (Vrms max)	48-660
Peak voltage (t=1 min.) (Vpeak)	1200
Maximum current (A)	3 x 25
Maximum off-state leakage (mA)	20 per phase
at Vmax and T = 25 °C	
Minimum current (mArms)	100 per phase
Max. 1-cycle surge	500
T=25°C (A peak)	
Max. 1-second surge	145
T=25°C (A peak)	
On-state voltage drop	1.6
at Imax and T=25°C (Vpeak)	
I2t (t=10ms) A2s	1260
Static (off-state) dv/dt (V/μs)	500
Supply frequency range (Hz)	47 to 80
cos φ (Zero voltage)	> 0.5
Rth junction/ ambient air	1° C/W

Input specifications


Input voltage (V)	90-280 ~	4-32 ==
Drop-out voltage	10 Vrms	1V ==
Maximum current	10 mArms	10 mA
(at Vmax)		
Nominal input resistance (kΩ)	45	3
Response time	20 ms	0.5 cycle max.
(close)		
Response time	30 ms	0.5 cycle max.
(open)		

For instantaneous switching models, turn-on time is less than 100 μs

Characteristics

Operating temperature (°C)	-20 to +80
Storage temperature (°C)	-40 to +100
Input to output insulation voltage (Vrms)	4000
Breakdown voltage (Vrms)	2500
Input/output capacitance (pF)	8
Material	Casing
	Self-extinguishing
	(UL 94 V0)
	Baseplate
	Aluminium
Weight (g)	940

Dimensions

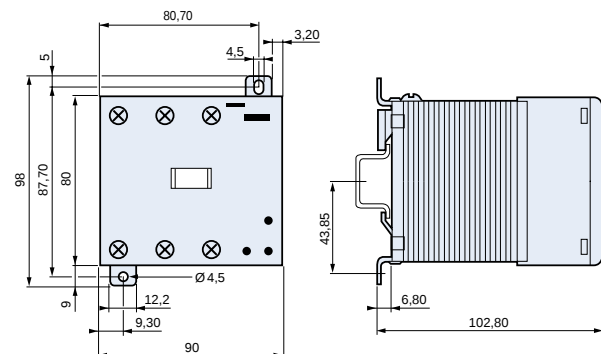

Part numbers

Zero voltage switching


Rating	Output voltage	Input voltage	SCR
3 x 25 A	48-660 V ~	90-280 V ~	84 130 311
		4-32 V ==	84 130 310

Instantaneous switching

Rating	Output voltage	Input voltage	SCR
3 x 25 A	48-660 V ~	4-32 V ==	84 130 312


Thermal dissipation curves

GRD range - three-phase with SCR

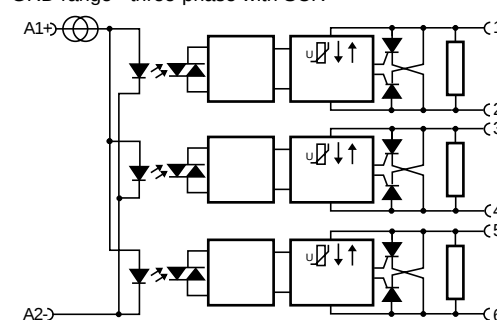

Curves for temperature-dependent derating

GRD range 90 mm - 3 x 20 A



To order, specify :

Standard products

1

Part number
Example: Solid state relay -
GRD range 90 mm - 84 130 311

Standard products,
non stocked

- Single phase
- Complete, compact units
- Tailor-made solution to current sinks
- DIN rail and panel mounting
- Rating: 35 and 45 A
- Back-to-back SCRs
- Protection by RC filter
- Optional protection by removable varistor
- LED display of input status
- UL - cUL approval and CE marking

Output specifications

Output specifications	SCR
Voltage range (Vrms max)	48-660
Peak voltage (t=1 min.) (Vpeak)	1000 ⁽¹⁾
Maximum current (A)	35 45
Maximum off-state leakage at Vmax and T = 25 °C (mArms)	4
Minimum current (mArms)	100
Max. 1-cycle surge T=25°C (A peak)	750
Max. 1-second surge T=25°C (A peak)	145
On-state voltage drop at Imax and T=25°C (Vpeak)	1.6
I2t (t=10ms) A2s	1260 5000
Static (off-state) dv/dt (V/μs)	500
Supply frequency range (Hz)	47 to 80
cos φ (Zero voltage)	> 0.5
Rth junction / ambient air	3.78° C/W 1.65° C/W

Input specifications

Input specifications	90-280 ~	4-32 =
Input voltage (V)	90-280 ~	4-32 =
Drop-out voltage	10 Vrms	1V =
Maximum current (at Vmax)	10 mArms	12 mA
Nominal input resistance	45	3
Response time (close)	20 ms	0.5 cycle max.
Response time (open)	30 ms	0.5 cycle max.


For instantaneous switching models, turn-on time is less than 100 μs

Characteristics

Operating temperature (° C)	-20 to +80
Storage temperature (° C)	-40 to +100
Input to output insulation voltage (Vrms)	4000
Breakdown voltage (Vrms)	2500
Input/output capacitance (pF)	8
Material	Casing: Self-extinguishing (UL 94 V0)
	Baseplate: Aluminium
Weight (g)	490
Input terminal capacity	Ø 2 mm max.
Output terminal capacity	Ø 5.6 mm max.

(1) Peak voltage 1200V, relay protected to 1100V ± 10%

Dimensions

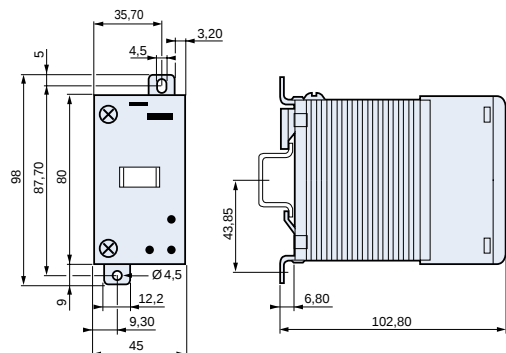

Part numbers

Zero voltage switching

Rating	Output voltage	Input voltage	SCR
35 A	48-660 V ~	90-280 V ~	84 130 110
		4-32 V =	84 130 111
45 A	48-660 V ~	90-280 V ~	84 130 115
		4-32 V =	84 130 113


Instantaneous switching

Rating	Output voltage	Input voltage	SCR
35 A	48-660 V ~	4-32 V =	84 130 112
45 A	48-660 V ~	4-32 V =	84 130 114


Thermal dissipation curves

GRD range - single-phase with SCR

Zero voltage switching




Instantaneous switching




Curves for temperature-dependent derating

GRD range 45 mm - 35 A



GRD range 45 mm - 45 A

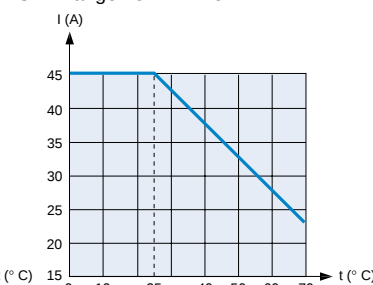

To order, specify :

Standard products

Standard products, non stocked



Part number

Example: Solid state relay - GRD range 45 mm - 84 130 110

- Two-phase
- Complete, compact units
- Tailor-made solution to current sinks
- DIN rail and panel mounting
- Rating: 2 x 25 A
- Back-to-back SCRs
- Protection by RC filter
- Optional protection by removable varistor
- LED display of input status
- UL - cUL approval and CE marking

Output specifications

Voltage range (Vrms max)	48-660
Peak voltage (t=1 min.) (Vpeak)	1200
Maximum current (A)	3 x 25
Maximum off-state leakage (mA)	20 per phase
at Vmax and T = 25 °C	
Minimum current (mArms)	100 per phase
Max. 1-cycle surge	500
T=25°C (A peak)	
Max. 1-second surge	135
T=25°C (A peak)	
On-state voltage drop	1.6
at Imax and T=25°C (Vpeak)	
I2t (t=10ms) A2s	1260
Static (off-state) dv/dt (V/μs)	500
Supply frequency range (Hz)	47 to 80
cos φ (Zero voltage)	> 0.5
Rth junction/ambient air	1° C/W

Input specifications

Input voltage (V)	90-280 ~	4-32 =
Drop-out voltage	10 Vrms	1V =
Maximum current	10 mArms	10 mA
(at Vmax)		
Nominal input resistance (kΩ)	45	3
Response time	20 ms	0.5 cycle max.
(close)		
Response time	30 ms	0.5 cycle max.
(open)		

For instantaneous switching models, turn-on time is less than 100 μs

Characteristics

Operating temperature (°C)	-20 to +80
Storage temperature (°C)	-40 to +100
Input to output insulation voltage (Vrms)	4000
Breakdown voltage (Vrms)	2500
Input/output capacitance (pF)	8
Material	Casing
	Self-extinguishing
	(UL 94 V0)
	Baseplate
	Aluminium
Weight (g)	940

Part numbers

Zero voltage switching


Rating	Output voltage	Input voltage	SCR
2 x 35 A	48-660 V ~	90-280 V ~	84 130 322
		4-32 V =	84 130 320

Instantaneous switching


Rating	Output voltage	Input voltage	SCR
2 x 35 A	48-660 V ~	4-32 V =	84 130 321

Curves for temperature-dependent derating

GRD range 90 mm - 2 x 25 A



Dimensions

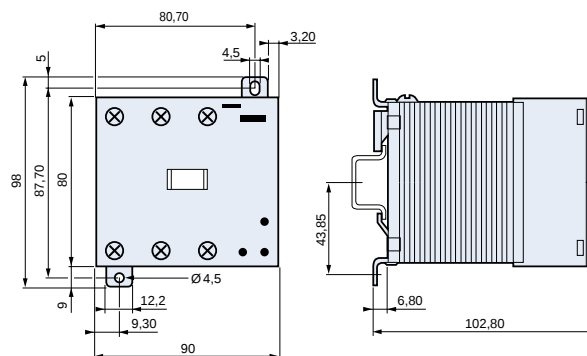

To order, specify:

Standard products


1

Part number

Example: Solid state relay - GRD range - 84 130 222

GN single phase solid state relays

- Currents from 10 to 125 A
- Output voltage from 24 to 660 VAC
- Optimum thermal response
- Regulated AC and DC control input
- Control status LED
- Available with or without protective cover

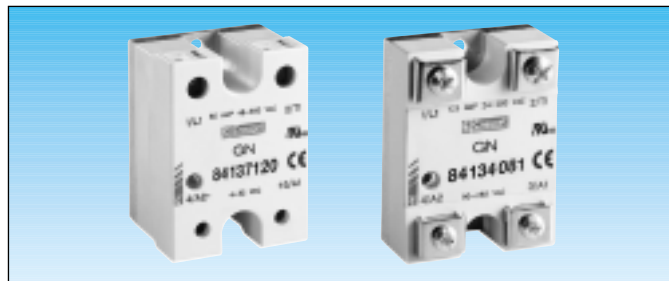


Part numbers

1

Current	Output voltage	Input voltage	Zero voltage switching		Instantaneous switching	
			with cover	without cover	with cover	without cover
10A	24-280VAC	4-32VDC	84 137 000	84 134 000	84 137 200	84 134 200
		18-36VAC/DC	84 137 002	84 134 002	84 137 202	84 134 202
		90-280VAC/DC	84 137 001	84 134 001	84 137 201	84 134 201
10A	48-660VAC	4-32VDC	84 137 100	84 134 100	84 137 300	84 134 300
		18-36VAC/DC	84 137 102	84 134 102	84 137 302	84 134 302
		90-280VAC/DC	84 137 101	84 134 101	84 137 301	84 134 301
25A	24-280VAC	4-32VDC	84 137 010	84 134 010	84 137 210	84 134 210
		18-36VAC/DC	84 137 012	84 134 012	84 137 212	84 134 212
		90-280VAC/DC	84 137 011	84 134 011	84 137 211	84 134 211
25A	48-660VAC	4-32VDC	84 137 110	84 134 110	84 137 310	84 134 310
		18-36VAC/DC	84 137 112	84 134 112	84 137 312	84 134 312
		90-280VAC/DC	84 137 111	84 134 111	84 137 311	84 134 311
50A	24-280VAC	4-32VDC	84 137 020	84 134 020	84 137 220	84 134 220
		18-36VAC/DC	84 137 022	84 134 022	84 137 222	84 134 222
		90-280VAC/DC	84 137 021	84 134 021	84 137 221	84 134 221
50A	48-660VAC	4-32VDC	84 137 120	84 134 120	84 137 320	84 134 320
		18-36VAC/DC	84 137 122	84 134 122	84 137 322	84 134 322
		90-280VAC/DC	84 137 121	84 134 121	84 137 321	84 134 321
75A	24-280VAC	4-32VDC	84 137 030	84 134 030	84 137 230	84 134 230
		18-36VAC/DC	84 137 032	84 134 032	84 137 232	84 134 232
		90-280VAC/DC	84 137 031	84 134 031	84 137 231	84 134 231
75A	48-660VAC	4-32VDC	84 137 130	84 134 130	84 137 330	84 134 330
		18-36VAC/DC	84 137 132	84 134 132	84 137 332	84 134 332
		90-280VAC/DC	84 137 131	84 134 131	84 137 331	84 134 331
100A	24-280VAC	4-32VDC	84 137 040	84 134 040	84 137 240	84 134 240
		18-36VAC/DC	84 137 042	84 134 042	84 137 242	84 134 242
		90-280VAC/DC	84 137 041	84 134 041	84 137 241	84 134 241
100A	48-660VAC	4-32VDC	84 137 140	84 134 140	84 137 340	84 134 340
		18-36VAC/DC	84 137 142	84 134 142	84 137 342	84 134 342
		90-280VAC/DC	84 137 141	84 134 141	84 137 341	84 134 341
125A	24-280VAC	4-32VDC	84 137 080	84 134 080	84 137 280	84 134 280
		18-36VAC/DC	84 137 082	84 134 082	84 137 282	84 134 282
		90-280VAC/DC	84 137 081	84 134 081	84 137 281	84 134 281
125A	48-660VAC	4-32VDC	84 137 180	84 134 180	84 137 380	84 134 380
		18-36VAC/DC	84 137 182	84 134 182	84 137 382	84 134 382
		90-280VAC/DC	84 137 181	84 134 181	84 137 381	84 134 381

Dimensions

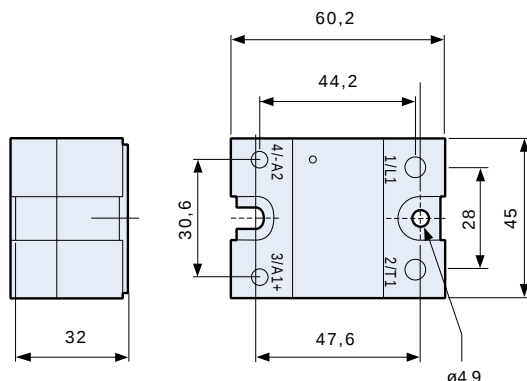

Characteristics

Operating temperature (C°)	- 20 to + 80
Storage temperature (C°)	- 40 to + 100
I/O insulation voltage (Vrms)	4000
Breakdown voltage (Vrms)	2500
Input/output capacitance (pF)	8
Frequency (Hz)	47 to 80
Material	Casing polycarbonate UL-94V
Material	Baseplate Zamak
Weight	Ip 20 114 g
Weight	Ip 00 97 g

To order, specify :







Standard products

1

Part number

Example: Single phase solid state relay - 84 137 120

Standard products, non stocked

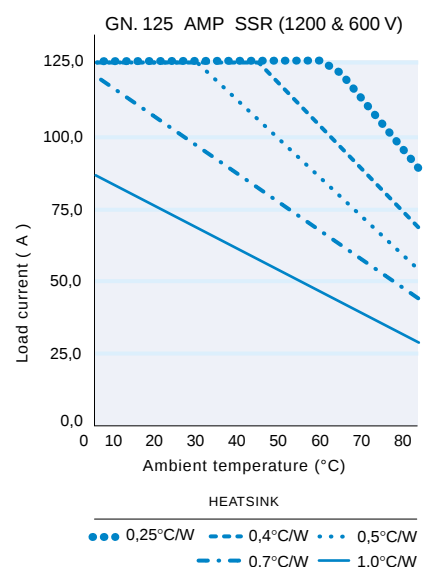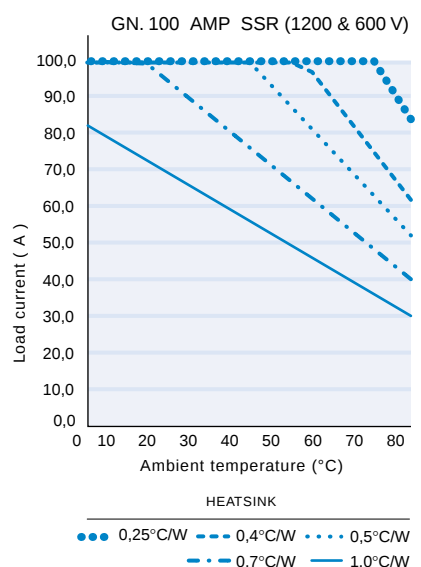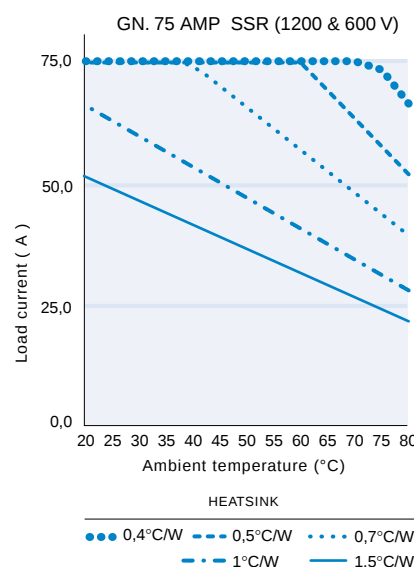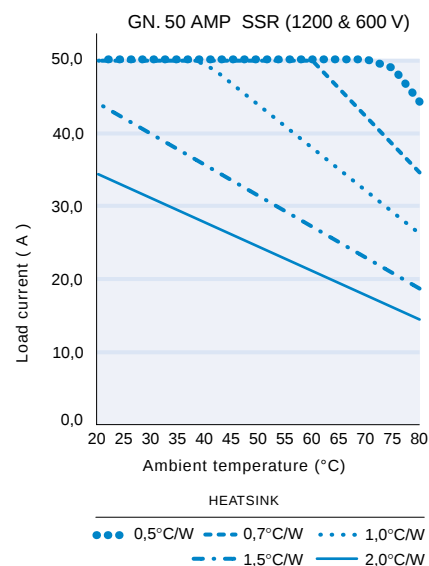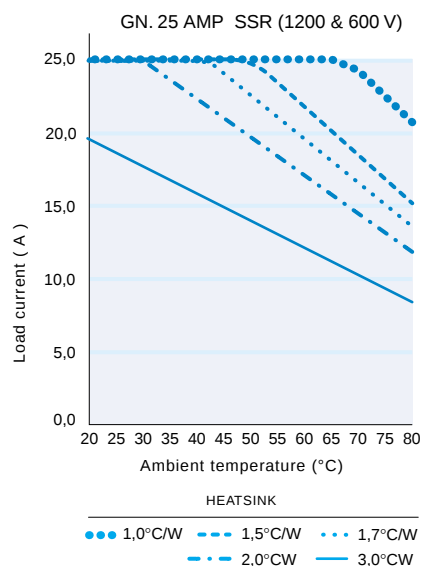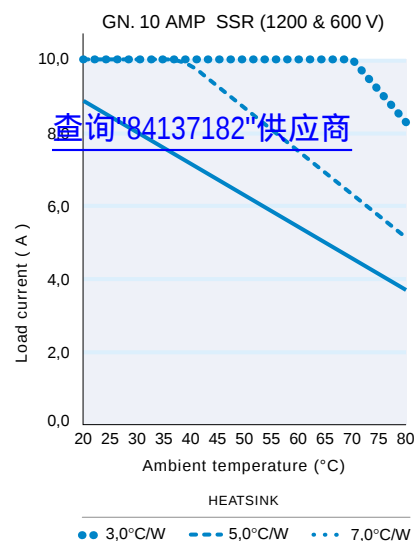

Control specifications

	4-32 VDC	18-36 VAC/DC	90-280VAC/DC
Drop-out voltage	1V	1V	10V
Max. regulated current (mA)	14	20	8.5
Turn-on time (ms) (zero voltage relay)	8.33 (60Hz) - 10 (50Hz)	20	20
Turn-on time (ms) (instantaneous relay)	0.1	0.1	0.1
Turn-off time (ms)	8.33 (60Hz) - 10 (50Hz)	30	30

Output specifications

	24-280 VAC			48-660 VAC		
Peak voltage not rep. (Vp)	600			1200		
Off-state leakage (@ Vmax and T=25°C)	2.5 - 4.25			2.75 - 4.75		
Max. current (A)	10	25	50	75	100	125
Minimum current (mA)	100	100	100	100	100	100
Max. non-rep. 1 s surge (T=25°C) (A)	80	150	235	300	360	510
Max. non-rep. 1-cycle surge (T=25°C) (A)	300	500	780	1000	1200	1700
I ² t (50Hz-60Hz) (A ² S)	375-450	1041-1250	2535-3042	4166-5000	6000-7000	12041-14450
Voltage drop at Imax (T=25°C) (V)	1.4	1.4	1.35	1.3	1.3	1.25
Static dV/dt (V/μs)	500	500	500	500	500	500
Thermal resistance Junction/to casing (°C/W)	0.4	0.4	0.25	0.155	0.155	0.15

- Intended for resistive loads
- Current ratings 10 and 25 A
- Output voltage 24 to 280 V ~
- "Zero voltage" switching
- Optimum thermal response
- Control input 3-32 V $\equiv$, 18 to 36 V ~, 90 to 280V ~
- Connection via screws or faston connectors
- UL/cUL, TUV approval and CE marking

Output specifications

Range	24-280 V ~	
Non-rep. peak voltage (Vp)	500	
Maximum off-state leakage (at Vmax and T = 25° C) (mA)	4.75	
Peak voltage (Arms)	10	25
Minimum current (mArms)	100	100
Max. non-rep. surge for 1 s (T = 25° C (A))	30	75
Max. non-rep. surge for 1 cycle (T = 25° C (A))	100	250
I ² t (50 Hz-60Hz) (A ² s)	50 - 41	288 - 240
Voltage drop at Imax T = 25° C (V)	1.65	1.85
Static dV/dt (V/ μ s)	200	200
Rth junction/casing (°C/W)	3	2


Input specifications

	4-32 V $\equiv$	18-36 V ~ $\equiv$	90-280 V ~ $\equiv$
Drop-out voltage (V)	1	2	10
Max. current (mA)	14	8	8.5
Turn-on time (ms)	8.33 (60Hz)	20	20
Turn-off time (ms)	10 (50Hz)		
Turn-off time (ms)	8.33 (60Hz)	30	30
Turn-off time (ms)	10 (50Hz)		

Characteristics

Operating temperature (°C)	-20 to +80
Storage temperature (°C)	-40 to +100
I/O insulation voltage (Vrms)	4000
Breakdown voltage (Vrms)	2500
Input/output capacitance (pF)	8
Frequency (Hz)	47 to 63
Material	Casing
	UL 94 V
	Baseplate
	Zamak
Weight (g)	97

Dimensions

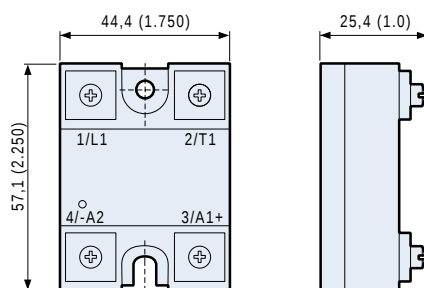


Part numbers


Rating	Output voltage	Input voltage	Screw	Faston
10 A	24-280 V ~	3-32 V $\equiv$	84 134 900	84 134 907
		18-36 V ~ $\equiv$	84 134 902	84 134 908
		90-280 V ~ $\equiv$	84 134 901	84 134 909
25 A	24-280 V ~	3-32 V $\equiv$	84 134 910	84 134 917
		18-36 V ~ $\equiv$	84 134 912	84 134 918
		90-280 V ~ $\equiv$	84 134 911	84 134 919

Thermal dissipation curves

10 A

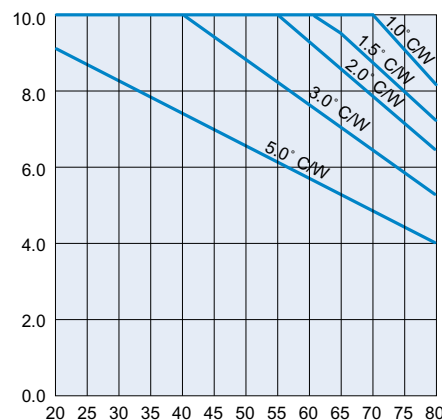

25 A

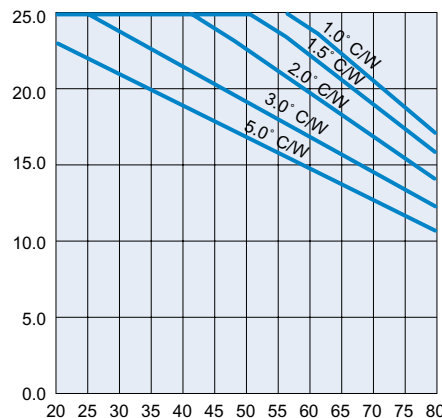

To order, specify:

Standard products

Standard products, non stocked

1

Part number

Example : GN Triac low-cost single-phase solid state relay - 84 134 900

[查询"84137182"供应商](#)

100%
THE ONLINE CATALOGUE
HOME
MANUALS
DISTRIBUTORS
SUBSCRIBE
CROUZET WEBSITES
WEBMASTER

Courtesy of Steven Engineering, Inc. • 230 Ryan Way, South San Francisco, CA, 94080-6370 • Main Office: (650) 588-9200 • Outside Local Area: (800) 253-9200 • www.stevenengineering.com

RESULT OF YOUR SEARCH

You are in : [Control Automation](#) / [Solid state relays](#) / [Single-phase GN](#) / [GND](#) / [FET VERSION](#) / [84 137 870](#)

84 137 870

[Specifications](#)[Products in the same range](#)

Selling points of the range :

- FET transistor versions 10, 15 and 30 A
- Bipolar transistor version 10 A
- Control voltage : 3 to 32 V
- Optimum thermal response
- Available with or without protective cover
- UL/Cul, TUV approval and CE marking



Specifications

Current	30 A
Output voltage	1 - 50 V DC
input voltage	3 - 32 V DC
Protective cover	with protective cover
Turn-off voltage (V)	1
Thermal resistance Junction to casing (°C/W)	FET 10 A - 15 A : 2,25 FET 30 A : 2,45
Inputs specifications	
Output characteristics	
Max. controlled current	20 mA
Response time (close) (µs)	2
Response time on closing (µs)	50
Max. non-rep. 10 µ(T=25°C) (A)	FET 10 A : 60 FET 15 A : 120 FET 30 A : 160
Minimum current (mA)	1

Products in the same range

Bipolar version

Current	Output voltage	input voltage	Protective cover	Part number
10 A	3 - 60 V DC	3 - 32 V DC	without protective cover	84 134 750
10 A	3 - 60 V DC	3 - 32 V DC	with protective cover	84 137 750

FET VERSION

Current	Output voltage	input voltage	Protective cover	Part number
10 A	1 - 200 V DC	3 - 32 V DC	without protective cover	84 134 850
15 A	1 - 100 V DC	3 - 32 V DC	without protective cover	84 134 860
30 A	1 - 50 V DC	3 - 32 V DC	without protective cover	84 134 870
10 A	1 - 200 V DC	3 - 32 V DC	with protective cover	84 137 850
15 A	1 - 100 V DC	3 - 32 V DC	with protective cover	84 137 860
30 A	1 - 50 V DC	3 - 32 V DC	with protective cover	84 137 870



- Reverses rotation of three-phase motors
- Output voltage 24-480 V~
- Input voltage 3-32 V ~
- Input to output insulation voltage: 100ms
- Interlock against simultaneous actuation in both directions
- Back-to-back SCRs
- Input to output insulation voltage: 5000 V ~
- Protected by RC filter and overvoltage limiter
- Direction of rotation displayed by 2 green LEDs

Output specifications

Voltage range (Vrms)	24-480
Peak voltage (V peak)	1000
Maximum current (Arms)	25
Minimum current (mArms)	200
Max. 1-cycle surge (A peak)	270
Maximum off-state leakage (mArms)	10
I ² T (t=10ms)	365
On-state voltage drop at I _{max} and T=25°C	1.6 Vrms
Thermal resistance/Junction to casing (o C/W)	0.2
Static (off-state) dv/dt (V/μs)	500
Supply frequency range (Hz)	47 to 63
Response time (ms)	0.2
Maximum turn-off time (ms)	20
Reversing time (ms)	100


Input specifications

Input voltage (V)	3-32 ~
Drop-out voltage (V ~)	1
Max. input current (mA)	20
(input regulated current and limited)	
Nominal resistance (+/- 10% at 25°C) (kΩ)	1

Characteristics

Operating temperature (°C)	-20 to +80
Storage temperature (°C)	-40 to +100
Input to output insulation voltage	5000 V ~
Breakdown voltage	4000 V ~
Input/output capacitance (pF)	8
Material Casing	Self-extinguishing
Baseplate	Aluminium
Weight (g)	455

Connection

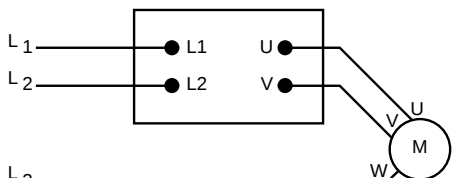


Part number

84 067 441


Accessories

Protective cover (see page 4/31)	26 532 797
Heatsink (see page 4/30)	
Heat transfer compound (see page 4/32)	18 373 112
DIN rail adaptor (see page 4/31)	26 532 764
Quick-blow fuses (see page 4/32)	

Equivalent circuits

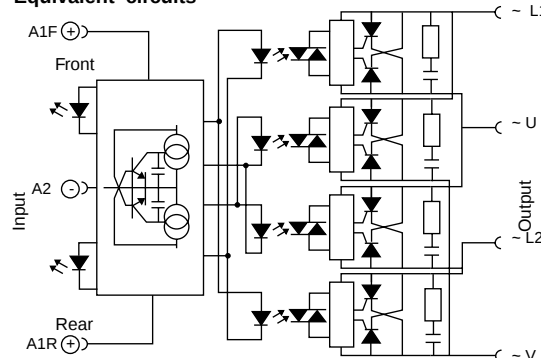


Thermal dissipation curves

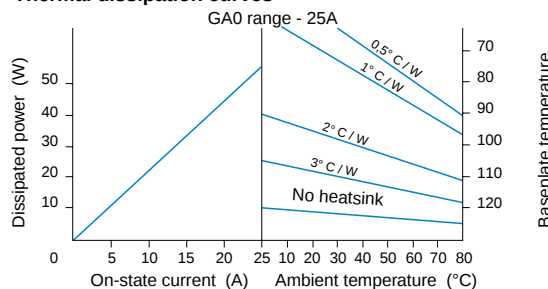

Dimensions

(General tolerances +/- 0.5)

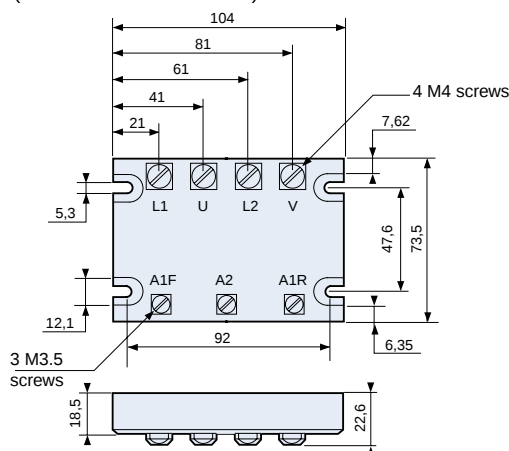

To order, specify:

Standard products

1 Part number

2 Accessory

Example: Solid state three-phase motor reversing relay - GA0 range - 84 067 441 - Protective cover - 26 532 797

- For controlling three-phase loads
- Rating 10, 25, 45 A
- Output voltages to 660 Vrms
- Control voltage 4-32 V $\equiv$ or 90-280 V $\sim$
- Peak voltage 1200 V
- Back-to-back SCR output
- Input to output insulation voltage: 4000 Vrms
- Protected against overvoltages by RC filter and overvoltage limiter
- Zero voltage or instantaneous switching

Output specifications

Voltage range (Vrms)	24-660		
Peak voltage (V peak)	1200		
Maximum current (A rms)	10	25	45
Minimum current (mA rms)	200	200	200
Max. 1-cycle surge (A peak)	160	270	450
Leakage current (mA rms)	10	10	10
I ₂ t (t=10ms)	128	365	1000
On-state voltage drop at I _{max} and T=25°C (V _{max})	1.6		
Thermal resistance/Junction to casing (°C/W)	0.25 °C/W	0.25 °C/W	0.2 °C/W
Supply frequency range (Hz)	47 to 63		
Static (off-state) dv/dt	500 V/μs		
Response time	3-32 V $\equiv$	11 ms	
	90-280 V $\sim$	20 ms	
Maximum turn-off time	3-32 V $\equiv$	11 ms	
	90-280 V $\sim$	30 ms	

(For instantaneous 3-32 V $\equiv$ switching models, turn-on time is less than 100 μs and turn-off time less than 1/2 cycle.)

Input specifications

Input voltage (V)	90-280 $\sim$	4-32 $\equiv$
Max. input current (mA) (input current limited)	10	20
Drop-out voltage (V)	10 $\sim$	1 $\equiv$
Nominal input resistance (kΩ)		1

Characteristics

Operating temperature (°C)	-20 to +80
Storage temperature (°C)	-40 to +100
Input to output insulation voltage (Vrms)	4000
Breakdown voltage (T=25°C, 1s) (Vrms)	4000
Input/output capacitance (pF)	< 8
Insulation resistance (MΩ)	104
Material Casing	Self-extinguishing (UL 94 V0)
Baseplate	Aluminium
Weight (g)	450




Part numbers

Rating	Switching mode	Input voltage	
10 A	Zero voltage	4-32 V $\equiv$	84 068 251
	Instantaneous	4-32 V $\equiv$	84 028 251
25 A	Zero voltage	90-280 V $\sim$	84 068 453
	Instantaneous	4-32 V $\equiv$	84 068 451
45 A	Zero voltage	90-280 V $\sim$	84 028 453
	Instantaneous	4-32 V $\equiv$	84 068 651
	Zero voltage	90-280 V $\sim$	84 068 653
	Instantaneous	4-32 V $\equiv$	84 068 651
		90-280 V $\sim$	84 028 653
		4-32 V $\equiv$	84 028 651




Accessories

Protective cover (see page 4/31)	26 532 796
Heatsinks (see page 4/30)	
Heat transfer compound (see page 4/32)	18 373 112
DIN rail adaptor (see page 4/31)	26 532 764
Quick-blow fuses (see page 4/32)	


Equivalent circuits

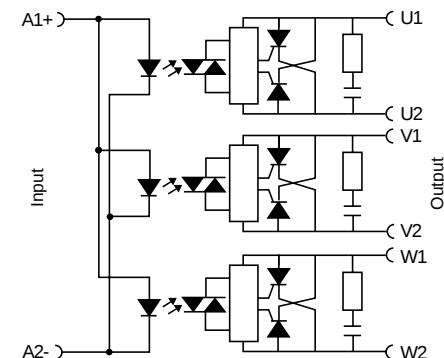

Thermal dissipation curves

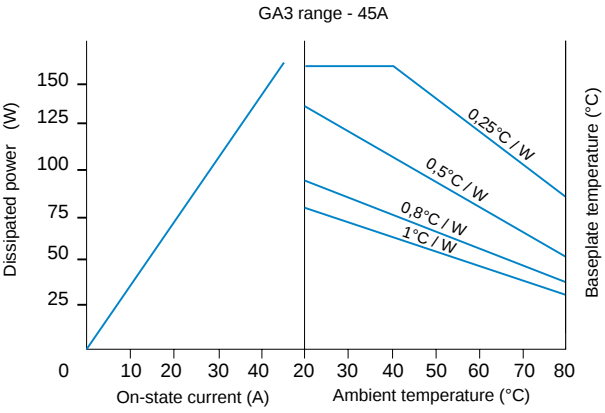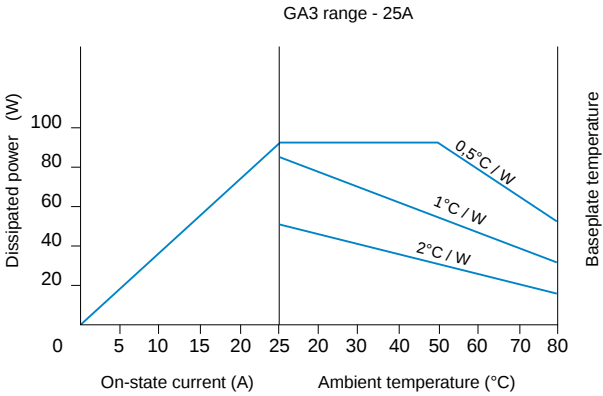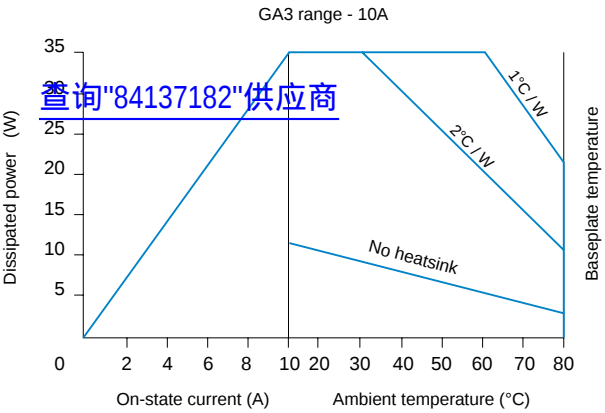

Dimensions

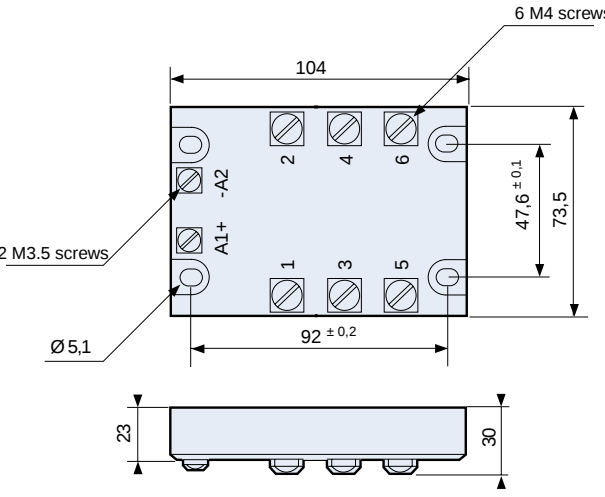

To order, specify:

Standard products

1

Part number

2

Accessory

Example: Solid state three-phase relay - GA3 range - 84 068 451 - Protective cover - 26 532 796

Standard products, non stocked

- PCB-mountable (flat pack = GA1, SIP = GA8)
- Rating: 4 A-5 A
- Peak voltage: 600 V
- Will withstand a 1-cycle 100 A surge
- **Zero voltage switching**
- UL - cUL 3 A approval and CE marking
- Zero voltage or instantaneous switching (5A only)
- Input to output insulation voltage: 4000 V
- Protection by RC filter

Output specifications

	24-280	24-280
Voltage range (Vrms)	600	850
Peak voltage (Vpeak)	4 or 5 depending on part no.	3
Maximum current (Vpeak)	0.05	0.05
Minimum current (Vpeak)	100	100
Max. 1-cycle surge (Apeak)	6	6
Maximum off-state leakage (mArms)	1.6	1.65
On-state voltage drop at Imax and T = 25°C (V peak)	200	200
Static (off-state) dv/dt (V/μs)	0.5 cycle	0.5 cycle
Maximum response time (close)	47 to 63	47 to 63
Supply frequency range		

Input specifications


Input voltage (V)	3-32 V
Drop-out voltage (V)	1
Maximum current at Vmax (mA)	25
Nominal input resistance (kΩ)	regulated

Characteristics

Operating temperature (°C)	-30 to +80
Storage temperature (°C)	-40 to +100
Input to output insulation voltage (Vrms)	4000
Input/output capacitance (pF)	8
Weight (g)	15



GA1



GA8

1

Zero voltage switching

Rating	Range	Output voltage	Input voltage	
4 A	GA 1	24-280 V ~	3-32 V =	84 064 131
	GA 8	24-280 V ~	3-32 V =	84 065 131
5 A	GA 8	24-280 V ~	3-32 V =	84 065 030
3 A	GA 8	24-480 V ~	3-32 V =	84 065 040

Instantaneous switching


Rating	Range	Output voltage	Input voltage	
5 A	GA 8	24-280 V ~	3-32 V =	84 025 030
3 A	GA 8	24-480 V ~	3-32 V =	84 025 040

Accessories



Quick-blow fuses (see page 4/32)

2



Equivalent circuits

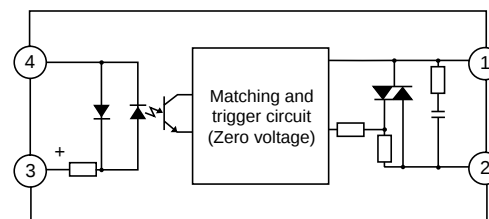

Dimensions (General tolerances +/- 0.5)

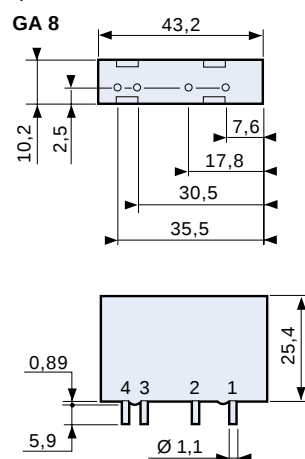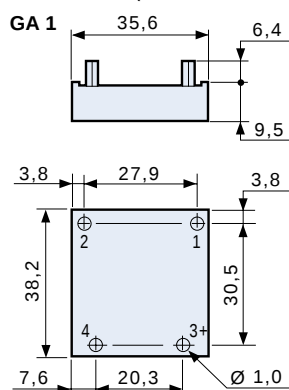

Curves for temperature-dependent derating

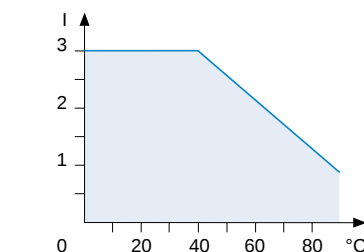

To order, specify:

Standard products

1 Part number

2 Accessory

Standard products, non stocked

Example: Solid state relay - GA8 range - 84 065 131 - Fuse Z 084 363

- Patented operating principle (96 050 16)
- 35 A single-phase solid state relay - ready for use
- Zero voltage switching
- Provides visual indication and electrical signal if a fault occurs in the circuit or on the relay
- LED display of
 - input status
 - relay status
 - relay overheating
- 2 alarm outputs : 4-32 VDC push-pull transistor

Operating principle

SMART SSR is a solid state relay which monitors its own correct operation in addition to that of the load being controlled.

SMART SSR provides information about the state of the relay and the load via 3 LED indicators and 2 alarm outputs.

Operation

SMART SSR powers itself between the relay control input -ve terminal and the 4-32 V $\equiv$ terminal.

When no faults are present and the relay is not being controlled, the alarm outputs are at 4-32 V $\equiv$ and the LEDs are off.

When no faults are present and the relay is being controlled, the green LED lights up and the alarm outputs stay at 4-32 V $\equiv$.

If the mains voltage disappears or if the relay output is short-circuited, the alarm output changes to 0 V $\equiv$ and the red LED flashes.


If the relay output is faulty, the alarm output changes to 0 V $\equiv$ and the red LED is on.

If the relay overheats, the "overheat" output changes to 0 V $\equiv$ and the yellow LED is on.


The overheat output is tripped when the internal temperature exceeds 125 °C.

The relay returns to normal state when the internal temperature drops to below 120 °C.

Operating diagram

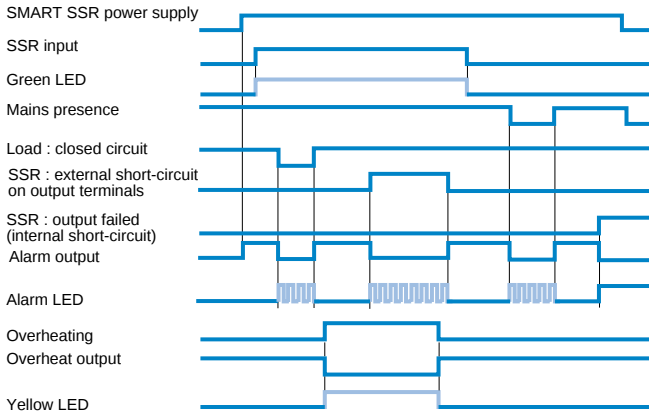

Dimensions

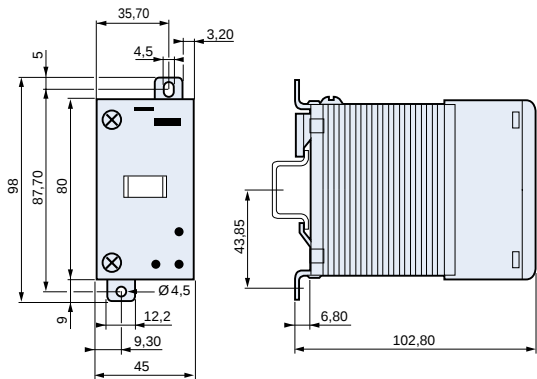

To order, specify :

Standard products

1

Part number

Example : SMART SSR 84 130 511

Part number

Rating	Output voltage	Input voltage	
35 A	48-530 V $\sim$	4-32 V	84 130 511

Output specifications (up to 25 °C)

Voltage range (max. Vrms)	48-660
Peak voltage - t = 1 min (V)	1000
Max. current (A)	35
Off-state leakage at V max. and 25 °C (mA)	8
Max. current surge 1 cycle (Apeak)	750
1 sec (Apeak)	145
On-state voltage drop at I max (Vpeak)	1.6
I ² t - t = 10 ms (A ² s)	1260
Static dv/dt (V/μs)	500
Supply frequency range (Hz)	47 to 63
Thermal resistance Junction / ambient air	3.78 ° / W

Control input specifications

Input voltage (V)	4 to 32 $\equiv$
Drop-out voltage	1 V
Max. input current (mA)	10
Response time on opening	0.5
(max. period) on closing	0.5


DC power supply / Alarm output

Supply voltage (in relation to the relay - terminal)	4 to 32 V $\equiv$
Current	15 to 45 mA
Voltage : alarm output	4 to 32 V $\equiv$
Current : alarm output	60 mA
Voltage : overheat output	4 to 32 V $\equiv$
Current : overheat output	60 mA


Characteristics

Temperature limits	Operation -20 to 80 °C Stored -40 to 100 °C
Input to output insulation voltage	4000 Vrms
Breakdown voltage	2500 Vrms
Input/output capacitance	8 pF

Curves for temperature-dependent derating



Connection

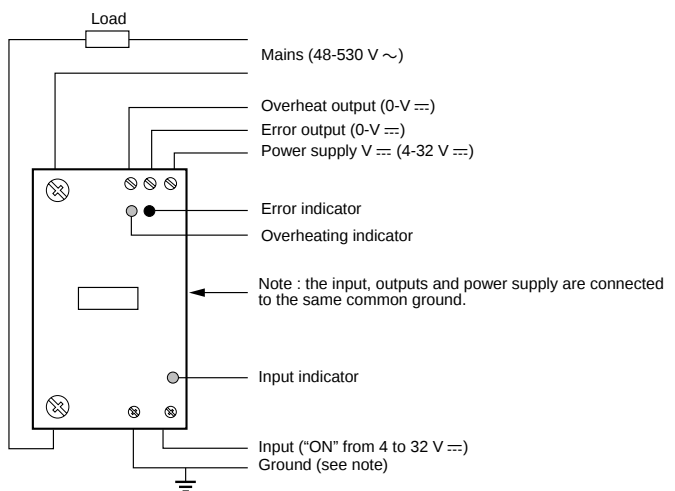

- **Patented operating principle (96 050 16).**
- Provides both visual and electrical information if a fault occurs in the circuit or on the solid state relay being controlled.
- For mounting on single-phase "hockey puck" type solid state relays.
- **Peak voltage 1200 V ~ : suitable for solid state relays with DC input and A ~ output.**
- **Alarm output : 4-32 V ~ push-pull transistor**
- **Optical isolation 4000 V ~.**
- **Conforms with EC low-voltage directive.**

Operating principle

The SMART MODULE can be mounted on any single-phase solid state relay with DC input / AC output in a "hockey puck" casing. The SMART MODULE has a constant power supply to ensure that both the relay and the load being controlled are functioning correctly.

The SMART MODULE provides information on the relay status by means of an LED display and an alarm output.

Operation


Power is supplied to the SMART MODULE between its 4-32 V ~ terminal (+) and the - terminal of the solid state relay control input.

During correct operation when the relay is not being controlled, the alarm output is at 4-32 V ~ and the LEDs are off.

During correct operation when the relay is being controlled, the green LED is on and the alarm remains at 4-32 V ~.

If mains voltage is lost or there is a short-circuit on the relay output, the alarm output changes to 0 V ~ and the red LED flashes.

If the relay output is faulty, the alarm output changes to 0 V ~ and the red LED comes on.

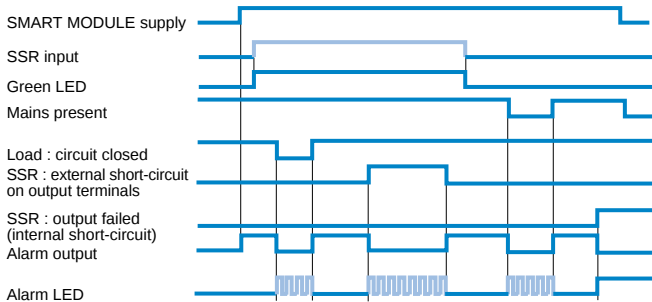

Part number

SMART MODULE 84 060 001

Electrical characteristics

Input

Nominal supply voltage	5 to 24 V ~
Maximum voltage	32 V ~
Minimum voltage	3 V ~
Maximum voltage in stopped state	1V ~

(Maximum authorised voltage on relay input terminals before the SMART MODULE registers control is present).

Line voltage

Line voltage	48 to 660 VRMS
Peak voltage (1 min. max.)	1200 Vpeak
Leakage current (at maximum line voltage)	8 mA RMS


DC power supply / Alarm output

Power supply voltage (in relation to relay terminal 4)	4 to 32 V ~
Current	15 to 35 mA
Voltage : alarm output	4 to 32 V ~
Current : alarm output	60 mA

General characteristics


Temperature limits	operating - 20 °C to + 80 °C storage - 40 °C to +100 °C
Input / output insulation voltage (limited to 1 mA for 1 sec. - Ta = 25 °C)	4000 VRMS

Connections

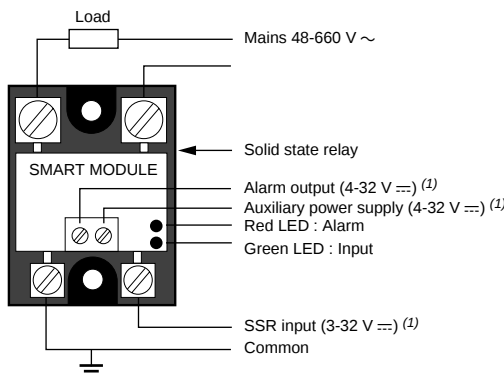

⁽¹⁾ The SSR input, the SMART MODULE alarm output and the SMART MODULE + power supply all share the same - terminal.

Dimensions



To order, specify :

Standard products

1

Part number

Example : SMART MODULE 84 060 001

- Low-cost solid state relay - Triac output
- Extra-slim casing
- Output current 12 and 20 A
- Output voltages 24-280 V ~ and 36-530 V ~
- Control input 4-15 V ==
- Version with low off-state leakage (no RC circuit)
- Optical isolation 4 KV
- UL - cUL approval and CE marking

Output specifications (at 25 °C)

Voltage range (Vrms max.)	24-280	36-530
Peak voltage - t = min (V)	600	800
Off-state leakage at Vmax and 25 °C		
Standard - with RC circuit (mA)	4.2	5.3
Low off-state leakage - no RC circuit (mA)	0.1	0.1
Static dv/dt		
Standard - with RC circuit (V/μs)	500	500
Low off-state leakage - no RC circuit (V/μs)	250	250
Peak voltage (A)	12	20
Minimum current (mA rms)	100	100
Max. 1-cycle surge (A peak)	120	200
Max. 1-second surge (A peak)	36	60
On-state voltage drop at I max (V peak)	1.65	1.55
I ² t (t = 10 ms) (50 Hz 1/2 wave) (A ² s)	55	55
I ² t (t = 8.33 ms) (60 Hz 1/2 wave) (A ² s)	50	50
Supply frequency range (Hz)	47 to 63	
Rth junction / casing (°K/W)	3	2.2


Control input characteristics

Input voltage (V)	4 to 15 ==
Drop-out voltage (V)	1
Maximum current (mA)	32 ma@ 15 V ==
36-530 V ~ version	
Zero voltage	63 ma@ 15 V ==
On-delay response time	
Zero voltage	0.5 cycle max.
Instantaneous (ms)	0.1
Off-delay response time	0.5 cycle max.

Characteristics

Temperature Use limits	-20 to 80 °C
Stored	-40 to 100 °C
Input to output insulation voltage (Vrms)	4000
Breakdown voltage (Vrms)	2500
Input/output capacitance (pF)	8


Dimensions

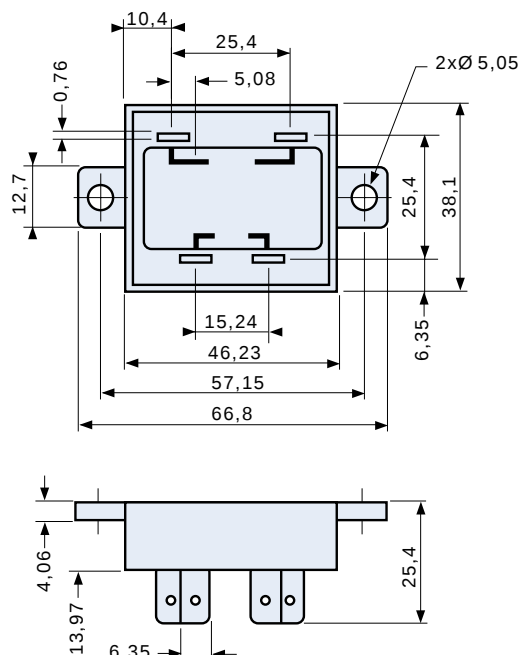

Part numbers


Rating	Output voltage	Switching	RC circuit	
12 A	24 - 280 V ~	zero voltage	No	84 132 000
12 A	24 - 280 V ~	zero voltage	Yes	84 132 200
12 A	24 - 280 V ~	instantaneous	No	84 132 100
12 A	24 - 280 V ~	instantaneous	Yes	84 132 300
12 A	36 - 530 V ~	zero voltage	No	84 132 400
12 A	36 - 530 V ~	zero voltage	Yes	84 132 600
12 A	36 - 530 V ~	instantaneous	No	84 132 500
12 A	36 - 530 V ~	instantaneous	Yes	84 132 700
20 A	24 - 280 V ~	zero voltage	No	84 132 010
20 A	24 - 280 V ~	zero voltage	Yes	84 132 210
20 A	24 - 280 V ~	instantaneous	No	84 132 110
20 A	24 - 280 V ~	instantaneous	Yes	84 132 310
20 A	36 - 530 V ~	zero voltage	No	84 132 410
20 A	36 - 530 V ~	zero voltage	Yes	84 132 610
20 A	36 - 530 V ~	instantaneous	No	84 132 510
20 A	36 - 530 V ~	instantaneous	Yes	84 132 710

Connection

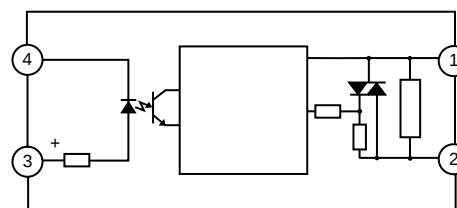


Curves for temperature-dependent derating

12 A version

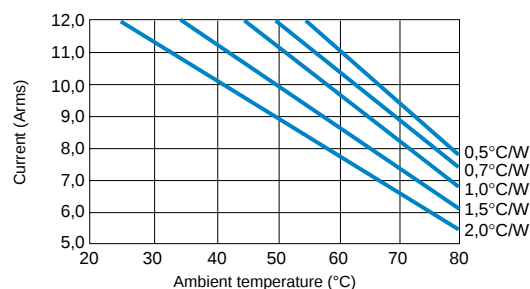

20 A version

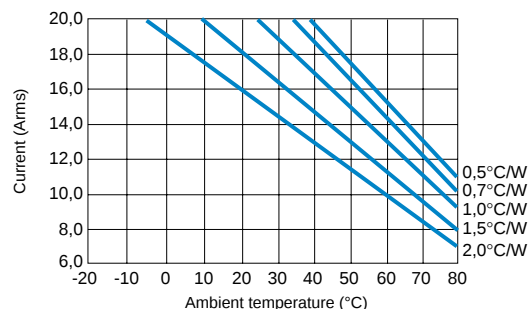

To order, specify:


Standard products

Standard products, non stocked

1 Part number

Example: Extra-slim solid state relay - GZ range - 84 132 000

Relay-heatsink assembly for DIN rail mounting

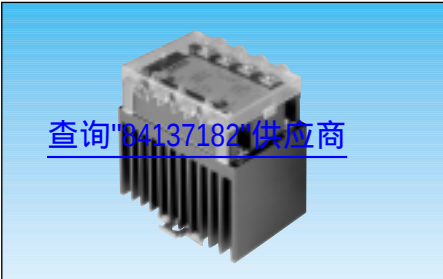

Unit part number

1

	Relay	Heatsink	Adaptor	Protective cover	Unit part number
Type GA0-25 A	84 067 441	26 532 762	26 532 764	26 532 797	84 067 449
Type GA3-25 A	84 028 451	26 532 762	26 532 764	26 532 796	84 028 459
Type GA3-25 A	84 068 451	26 532 762	26 532 764	26 532 796	84 068 459
Type GA3-25 A	84 068 453	26 532 762	26 532 764	26 532 796	84 068 409
Type GA3-45 A	84 068 651	26 532 762	26 532 764	26 532 796	84 068 659

Temperatures (° C)						Unit part number
20	30	40	50	60	70	
21	19	17	15	14	11	84 067 449
24	22	19	17	15	12	84 028 459
24	22	19	17	15	12	84 068 459
24	22	19	17	15	12	84 068 409
24	22	19	17	15	12	84 068 659

To order, specify:

Standard products

1 Part number



Standard products, non stocked

Example: Relay-heatsink assembly for DIN rail mounting 84 060 239

SOLID STATE RELAY ACCESSORIES

[查询"84137182"供应商](#)


HS1 HEATSINK

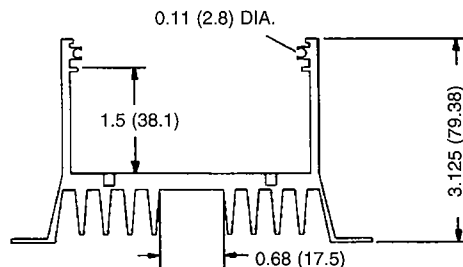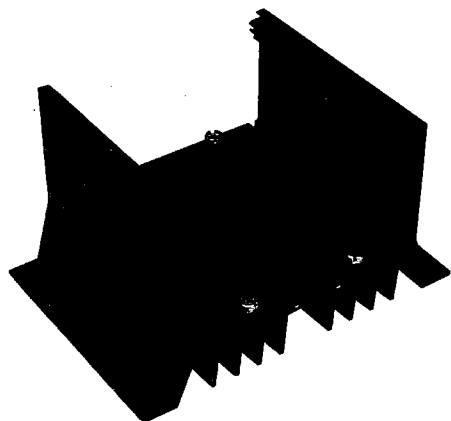

DIMENSIONS: inches (mm)

TOLERANCES: ± 0.02 inches (± 0.50)



MOUNTING HOLES
FOR 4MM SCREW (4)

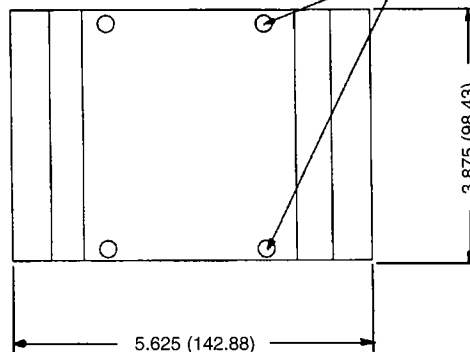

ORDERING INFORMATION:

Model #	Description
HS1	Heatsink 1.5°C/W (For GA0 & GA3 Series SSR's)


HS2 HEATSINK

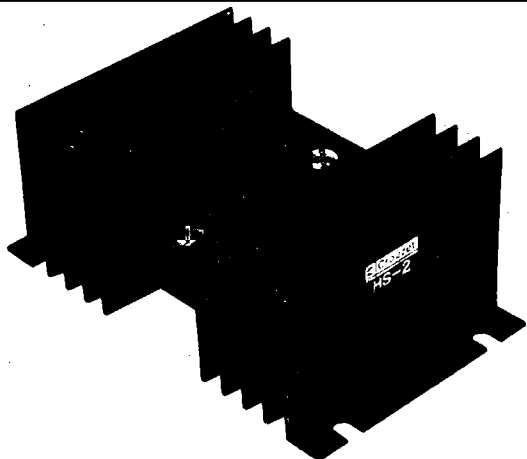

DIMENSIONS: inches

TOLERANCES: ± 0.02 inches

MATERIAL: AISI 6063-T5
Aluminum

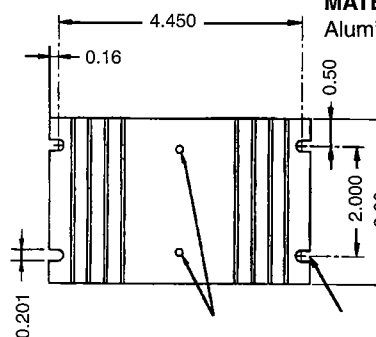

#8-32 UNC

FOR #8-32
SCREWS 4
PLACES

ORDERING INFORMATION:

Model #	Description
HS2	Heatsink 2.0°C/W (For G, GN & GA5 Series SSR's)

Products and specifications subject to change without notice.



Consult factory for application assistance.

204 Airline Drive, Suite 300, Coppell, Texas 75019 / Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet.com/us


SOLID STATE RELAY ACCESSORIES

[查询 84137182 供应商](#)

HS3 HEATSINK

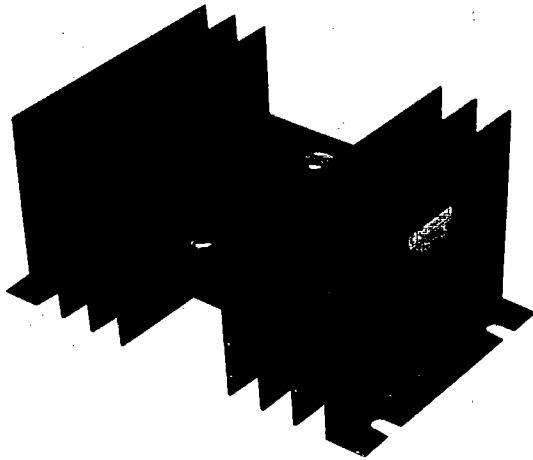



DIMENSIONS: inches
TOLERANCES: ± 0.02 inches
MATERIAL: AISI 6063-T5 Aluminum
FINISH: Black Anodized

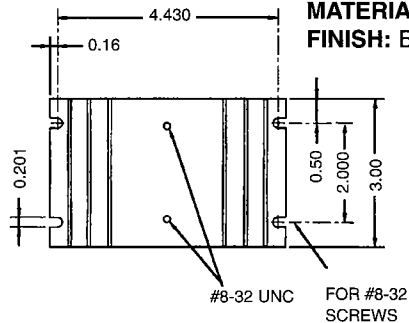


ORDERING INFORMATION:

Model #	Description
HS3	Heatsink 1.5°C/W (For G, GN & GA5 Series SSR's)

HS4 HEATSINK

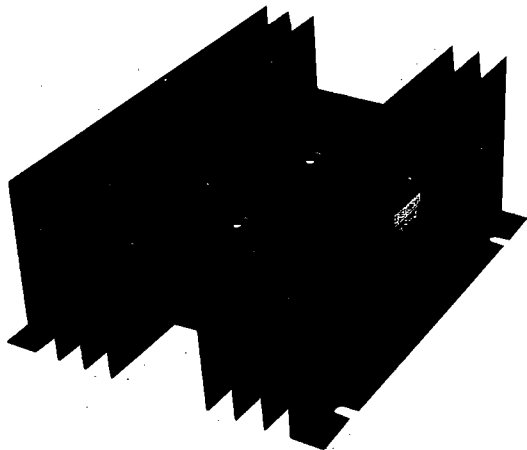

DIMENSIONS: inches
TOLERANCES: ± 0.02 inches
MATERIAL: AISI 6063-T5 Aluminum
FINISH: Black Anodized


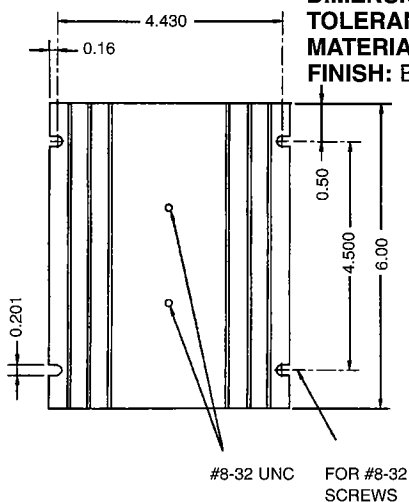


ORDERING INFORMATION:

Model #	Description
HS4	Heatsink 1.0°C/W (For G, GN & GA5 Series SSR's)

SOLID STATE RELAY ACCESSORIES

HS5 HEATSINK

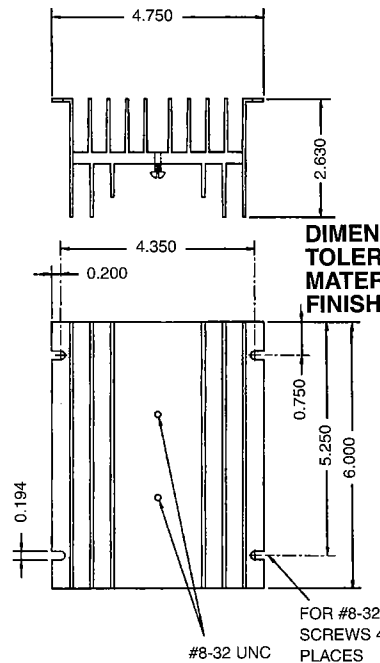
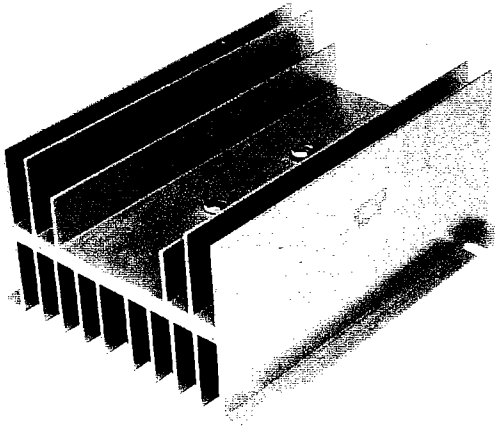


DIMENSIONS: inches
TOLERANCES: ± 0.02 inches
MATERIAL: AISI 6063-T5 Aluminum
FINISH: Black Anodized

ORDERING INFORMATION:

Model #	Description
HS5	Heatsink 0.7°C/W (For G, GN & GA5 Series SSR's)

HS6 HEATSINK

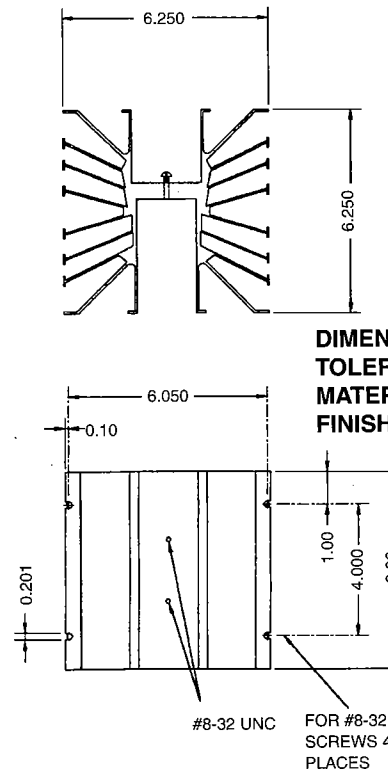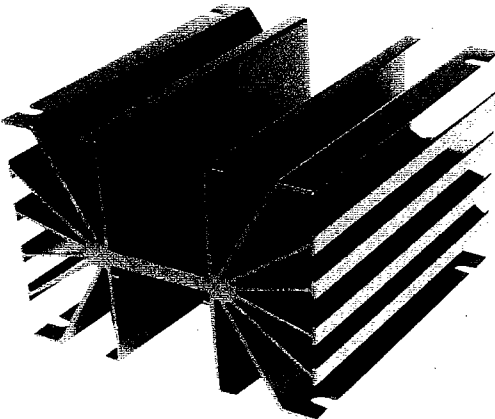

DIMENSIONS: inches
TOLERANCES: ± 0.02 inches
MATERIAL: AISI 6063-T5 Aluminum
FINISH: Black Anodized



ORDERING INFORMATION:

Model #	Description
HS6	Heatsink 0.5°C/W (For G, GN & GA5 Series SSR's)

Products and specifications subject to change without notice.
 Consult factory for application assistance.

SOLID STATE RELAYS


HS7 HEATSINK

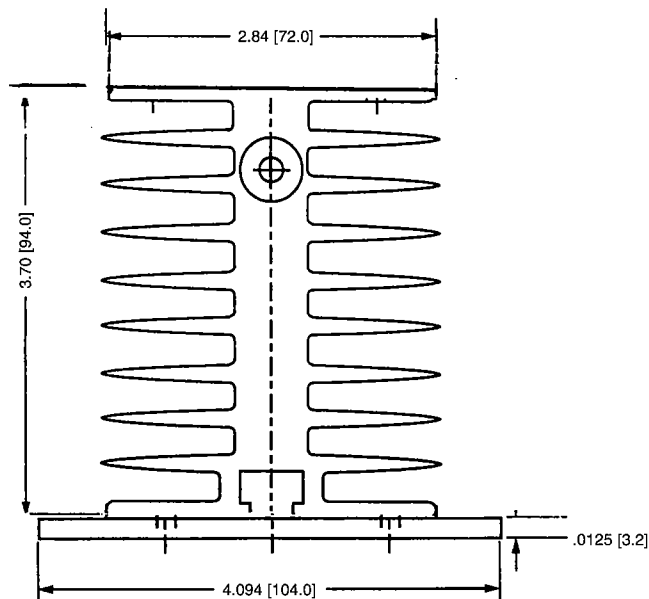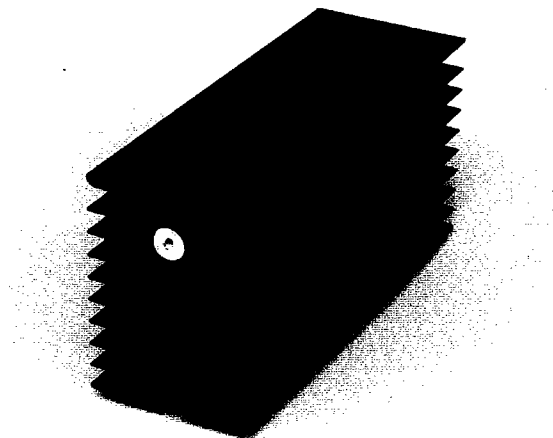

1

ORDERING INFORMATION:




Model #	Description
HS7	Heatsink 0.9°C/W (For G, GN, GA5, GA0 & GA3 Series SSR's)

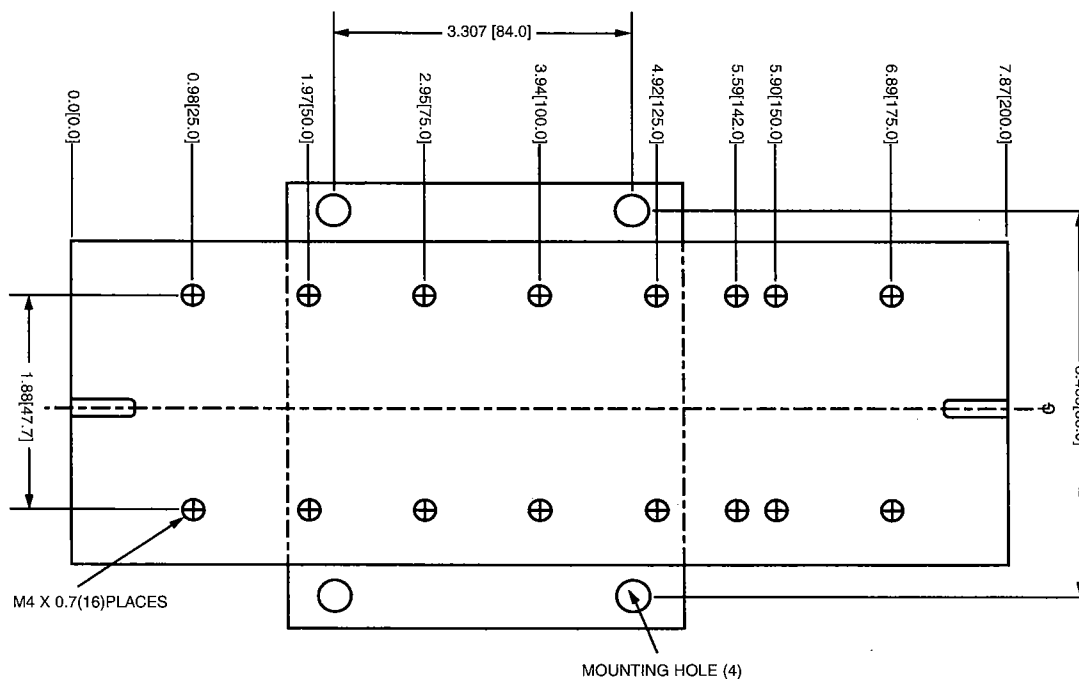

DIMENSIONS: inches (mm)
TOLERANCES: ±0.02 inches
MATERIAL: AISI 6063-T5 Aluminum
FINISH: Black Anodized

SOLID STATE RELAYS




HS8 HEATSINK

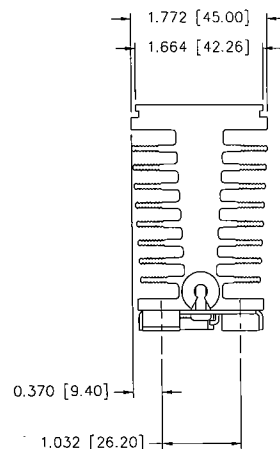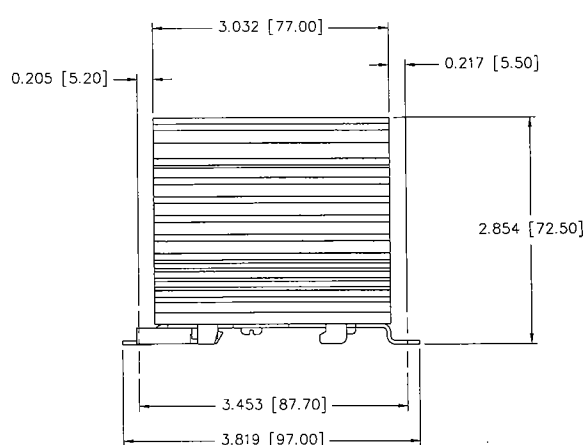

ORDERING INFORMATION:

Model #	Description
HS8	Heatsink 2.1°C/W (For G, GN & GA5 Series SSR's)

HS9 HEATSINK

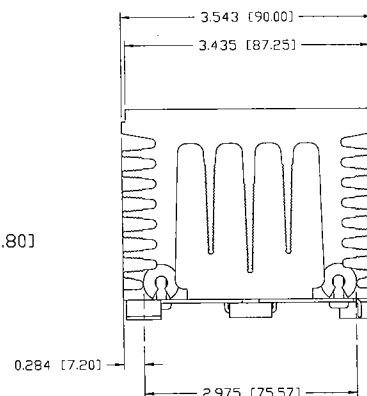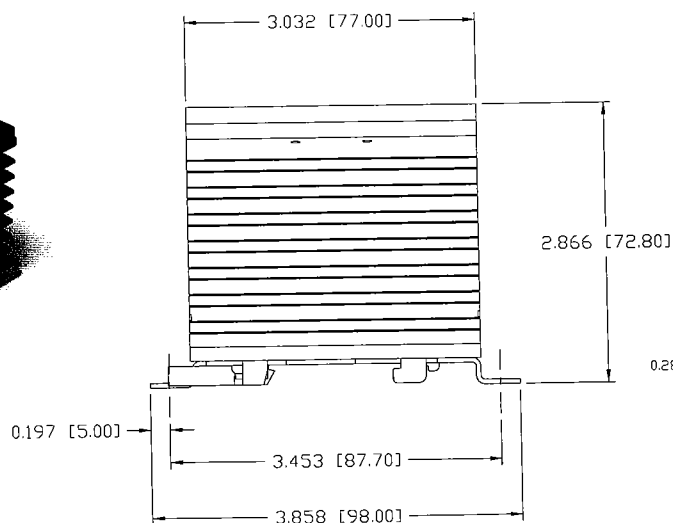

ORDERING INFORMATION:

Model #	Description
HS9	Heatsink 1.5°C/W (For G, GN & GA5 Series SSR's)

DIMENSIONS: inches (mm)

TOLERANCES: ±0.02 inches

MATERIAL: AISI 6063-T5 Aluminum




FINISH: Black Anodized

Products and specifications subject to change without notice.
Consult factory for application assistance.

SOLID STATE RELAYS

查询 84137182 供应商




HS10 HEATSINK

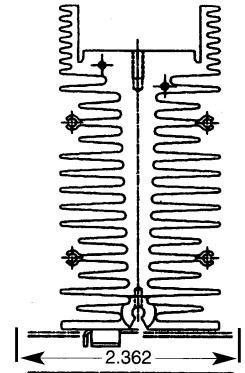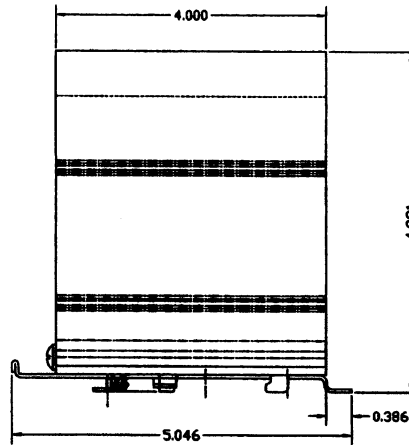

ORDERING INFORMATION:

Model #	Description
HS10	Heatsink 1.1°C/W (For G, GN & GA5 Series SSR's)

HS12 HEATSINK

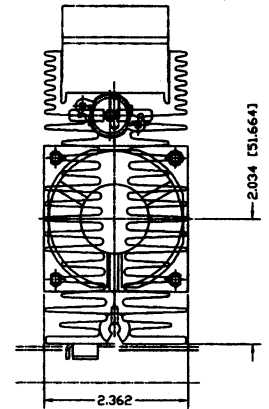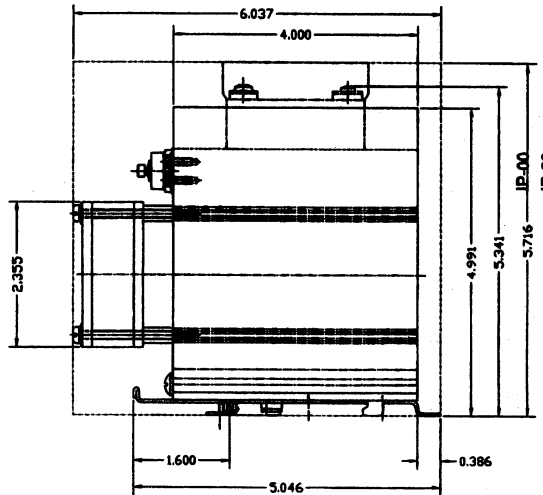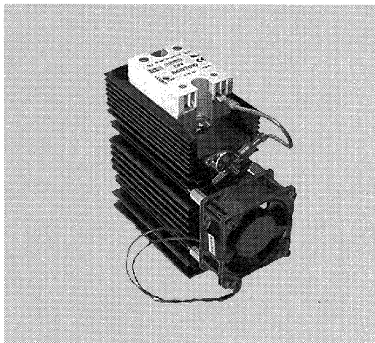

(Relay Optional)

ORDERING INFORMATION:

Model #	Description
HS12	Heatsink 0.55°C/W (For G, GN & GA5 Series SSR's)

DIMENSIONS: inches (mm)

TOLERANCES: ±0.02 inches

MATERIAL: AISI 6063-T5 Aluminum


FINISH: Black Anodized

Products and specifications subject to change without notice.
Consult factory for application assistance.

DIGITAL I/O MODULES




查询 64137182 供应商

DIN-RAIL MOUNTABLE INPUT MODULES

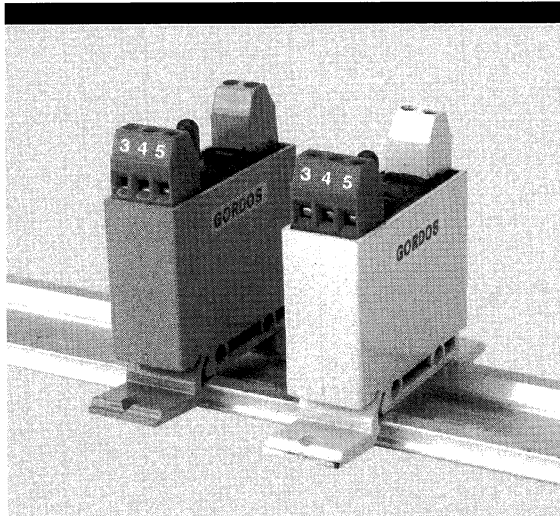

FEATURES:

- CE Compliant
- DIN-Rail Mountable Single Point Input Modules
- AC Inputs for 24 V, 120 V, 240 V
- DC Inputs for 3.3 to 32 V, 10 to 48 V
- UL Recognized (E46203)/CSA Certified (38595)
- 4 kV Optical Isolation
- Open-Collector Output, with LED Indicator
- Input and Output Barrier Strips Accept 14 to 28 AWG Wire
- Configured for Panel Mounting

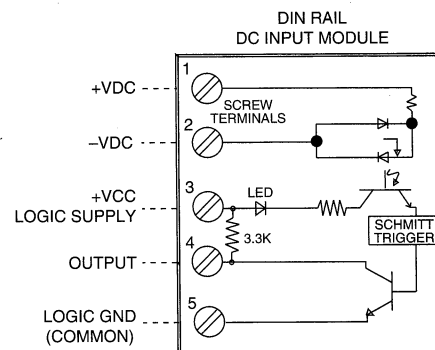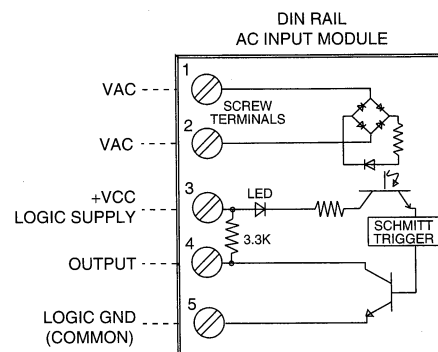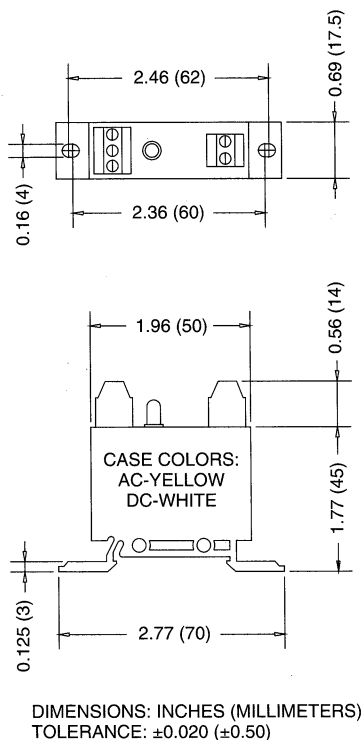

(EQUIVALENT CIRCUIT DIAGRAMS)

Products and specifications subject to change without notice.
Consult factory for application assistance.

DIGITAL I/O MODULES

查询 84137182 供应商

DIN-RAIL MOUNTABLE INPUT MODULES

INPUT SPECIFICATIONS: (1)

Model Number	DRIAC5 DRIAC24	DRIAC5A DRIAC24A	DRIDC5 DRIDC24	DRIDC5A DRIDC24A
Parameter				
Nominal Voltage	120 VAC	240 VAC	5-28 VDC	12-48 VDC
Maximum Voltage	140 VAC/VDC	280 VAC/VDC	32 VDC/VAC	48 VDC
Minimum Voltage	90 VAC/VDC	180 VAC/VDC	4.0 VDC/VAC	10 VDC
Resistance (2)	28 kΩ	75 kΩ	1 kΩ	2 kΩ
Maximum Current (3)	5.0 mArms	5.0 mArms	34 mA	34 mA
Drop-out Current (4)	2.0 mArms	1.5 mArms	1.0 mA	1.0 mA
Allowable Current/	2.5 mArms	2.0 mArms	1.5 mA	1.5 mA
Voltage for No Output (5)	50 VAC/VDC	50 VAC/VDC	2.0 VDC	4.0 VDC

OUTPUT SPECIFICATIONS: (1)

Model Number	DRIAC5 DRIAC5A DRIDC5 DRIDC5A	DRIAC24 DRIAC24A DRIDC24 DRIDC24A	Units
Parameter			
Nominal Logic Supply Voltage	5.0	24.0	VDC
Maximum Logic Supply Voltage	6.0	30.0	VDC
Minimum Logic Supply Voltage	3.0	20.0	VDC
Maximum Logic Supply Current (6)	28.0	28.0	mA
Maximum Logic Supply Leakage Current (7)	10.0	10.0	μA
Maximum Voltage (8)	30.0	30.0	VDC
Maximum Current (9)	50.0	50.0	mA
Maximum Leakage Current (10)	10.0	10.0	μA
Maximum Voltage Drop (11)	0.2	0.2	VDC

GENERAL SPECIFICATIONS: (1)

Model Number	DRIAC5 DRIAC5A DRIAC24 DRIAC24A	DRIDC5 DRIDC5A DRIDC24 DRIDC24A	Units
Parameter			
Operating Temperature Range	-30 to 80	-30 to 80	°C
Storage Temperature Range	-40 to 100	-40 to 100	°C
Maximum Turn-on Time (12)	20	1.0	mSec
Maximum Turn-off Time (12)	30	1.0	mSec
Input/Output Isolation Voltage (13)	4000	4000	VAC
Input/Output Capacitance (typical)	8	8	pF
Line Frequency Range	47 to 63	DC	Hertz

TABLE OF MODEL NUMBER SUFFIXES IDENTIFYING OPTIONAL FEATURES

Suffix	Feature
A	High voltage versions (240 VAC for AC modules), (48 VDC for DC modules).


Notes:

- (1) Specifications apply to an ambient temperature of -30 to 80°C unless otherwise noted.
- (2) Resistance values for IAC modules are effective impedance values at 25°C.
- (3) Measured at maximum specified input voltage, 25°C.
- (4) Defined as the maximum current allowed through the module's input to guarantee that the output will switch from "on" to "off." Higher currents may result in the output remaining in the "on" state.
- (5) Defined as the maximum current allowed through the module's input that will not switch the module's output state from "off" to "on."
- (6) At maximum specified logic supply voltage and 25°C.
- (7) At maximum specified logic voltage and 25°C.
- (8) Maximum allowable applied voltage across open collector output transistor. Factory recommends this voltage not exceed logic voltage.
- (9) Maximum allowable sinking current through open collector output transistor.
- (10) At maximum output voltage and 25°C.
- (11) At maximum allowable output current and 25°C.
- (12) At nominal logic supply voltage, 25 mA output sinking current, nominal input voltage and 25°C.
- (13) At 25°C for 1 second maximum duration.

DIGITAL I/O MODULES



查询 64137182 供应商

DIN-RAIL MOUNTABLE OUTPUT MODULES


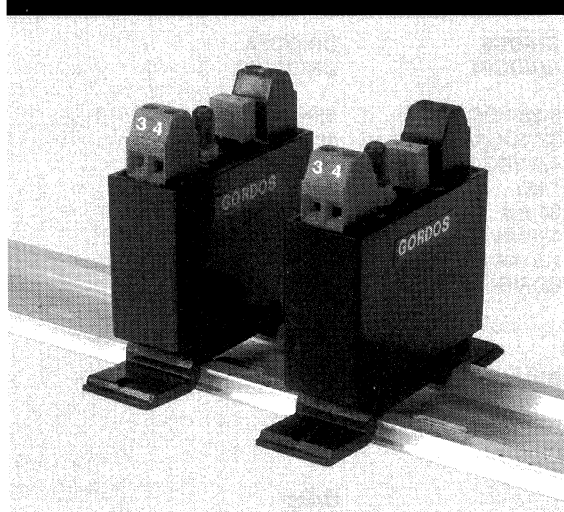


FEATURES:

- CE Compliant
- DIN-Rail Mountable Single Point Output Modules (35mm DIN)
- UL Recognized/Horse Power Rated (E46203)/ CSA certified (38595)
- AC Output Rating 5 Amp at 12 to 280 VAC, with 250 Amp Single Cycle Surge Capability
- DC Output Rating 3 Amp at 3 to 60 VDC
- 3 to 32 VDC Input for AC Module, 5V or 24V for DC Module
- Zero Voltage Turn-on for AC Module
- 4 kV Optical Isolation with LED Indicator
- Barrier Strips Accept 14 to 28 AWG Wire
- Configured for Panel Mounting

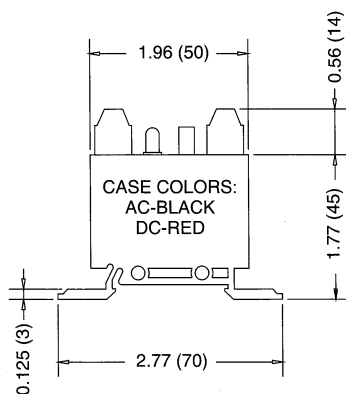

DIMENSIONS: INCHES (MILLIMETERS)
TOLERANCE: ± 0.020 (± 0.50)

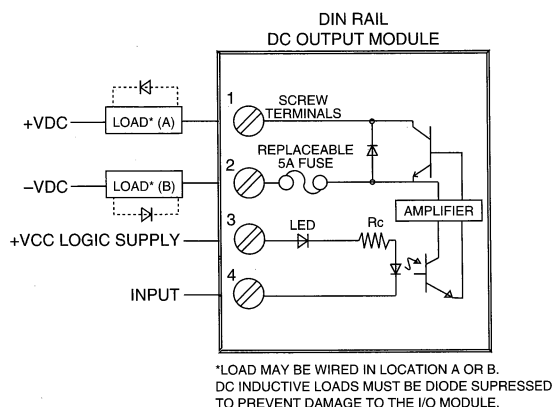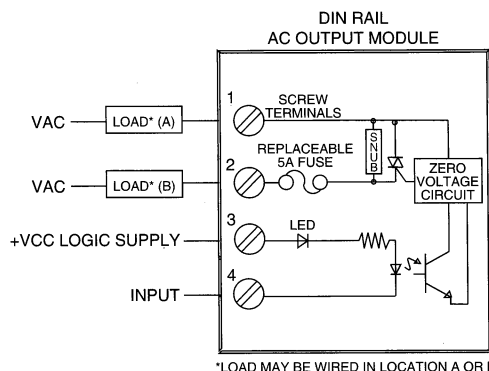

(EQUIVALENT CIRCUIT DIAGRAMS)

Products and specifications subject to change without notice.
Consult factory for application assistance.

DIGITAL I/O MODULES

查询 84137182 供应商

DIN-RAIL OUTPUT MODULES

INPUT SPECIFICATIONS: (1)

Model Number	DROAC	DRODC5	DRODC24	Units
Parameter				
Nominal Voltage	5-24	5.0	24.0	VDC
Minimum Voltage	3.7	3.5	18.0	VDC
Maximum Voltage	32	8.0	32.0	VDC
Drop-Out Voltage	1.0	1.0	1.0	VDC
Maximum Current (2)	18.0	18.0	13.0	mA
Resistance (3)	—	250	2000	Ohms

OUTPUT SPECIFICATIONS: (1)

Model Number	DROAC	DRODC5 DRODC24
Parameter		
Nominal Line Voltage	120/240 VAC	5-48 V
Minimum Line Voltage	12 VAC	3.0 V
Maximum Line Voltage	280 VAC	60 V
Max Off-State Voltage (4)	600 Vpeak	60 V
Max Off-State Leakage (5)	.1 mArms	10 μ A
Static Off-State dv/dt (6)	200 V / μ sec	N/A
Maximum Rated On-State Current (7)	5.0 Arms	3.0 A
Min On-State Current	50 mArms	10 mA
Max Surge Current (8)	250 Apeak	5.0 A
On-State Voltage Drop (9)	1.6 V	1.5 V
Horse Power Rating (13)	1/2 H.P.	N/A

GENERAL SPECIFICATIONS: (1)

Model Number	DROAC	DRODC5 DRODC24	Units
Parameter			
Operating Temperature Range	-30 to 80	-30 to 80	$^{\circ}$ C
Storage Temperature Range	-40 to 100	-40 to 100	$^{\circ}$ C
Maximum Turn-on Time (10)	8.33	0.1	mSec
Maximum Turn-off Time (10)	8.33	0.75	mSec
Input/Output Isolation Voltage (11)	4000	4000	VAC
Input/Output Capacitance (typical)	8	8	pF
Line Frequency Range	47 to 63	DC	Hertz
Fuse (12)	5	5	Amps

Notes:

- (1) Specifications apply to an ambient temperature of -30 to 80 $^{\circ}$ C unless otherwise noted.
- (2) At nominal input voltage for DC modules, AC modules are current limited +/-10% at 25 $^{\circ}$ C.
- (3) +/-10% at 25 $^{\circ}$ C for DC modules.
- (4) Maximum 1 minute duration for OAC modules when applied as a DC voltage rather than peak AC voltage.
- (5) At maximum line voltage, 25 $^{\circ}$ C for OAC modules, and 80 $^{\circ}$ C for ODC modules.
- (6) Minimum dv/dt per EIA/NARM RS443, method RS397. dv/dt ratings do not apply to ODC modules.
- (7) At 40 $^{\circ}$ C, derate OAC modules by 125 mA/ $^{\circ}$ C to 80 $^{\circ}$ C; derate ODC modules by 50 mA/ $^{\circ}$ C to 80 $^{\circ}$ C.
- (8) At 25 $^{\circ}$ C. Maximum duration: 1 AC cycle for OAC modules, 1 second for ODC modules.
- (9) At maximum rated on-state current and 25 $^{\circ}$ C.
- (10) At maximum line voltage, maximum rated output current, nominal input voltage, 25 $^{\circ}$ C. Switching speed of OAC modules based upon 60 Hz line frequency.
- (11) At 25 $^{\circ}$ C for 1 second maximum duration.
- (12) Fuse is Buss, PC-TRON #PCE5.
- (13) 1/2 H.P. at 240 VAC, 1/4 H.P. at 120 VAC.

Products and specifications subject to change without notice.
Consult factory for application assistance.