

查询"CE2592"供应商

C25xx Model

5X7 mm SMD, 2.5V, LVCMOS

Lead Free
RoHS
Compliant

Clock Oscillator

Frequency Range: 1.544MHz to 70MHz

Frequency Stability: ± 20 ppm to ± 100 ppm

Temperature Range:

Operating: -10°C to 70°C

(Option) -40°C to 85°C

Storage: -55°C to 120°C

Input Voltage: 2.5V $\pm$ 0.125V

Input Current: 35mA Max

Output: LVCMOS

Symmetry: 45/55% Max @ 50% Vdd

Rise/Fall Time: 1ns Typ, 3.5ns Max

Logic: "0" = 10% Vdd Max

"1" = 90% Vdd Min

Load: 15pF Max

Jitter RMS: 12KHz~20MHz 0.5ps Typ, 1ps Max


Aging: <3ppm 1st/yr, <1ppm every year thereafter




Designed to meet today's requirements for 2.5V applications. The C25xx Series utilizes only fundamental and 3rd overtone crystal designs. No multiplier is used thereby reducing output jitter. Available on 16mm tape and reel in quantities of 1K.

Dimensions inches (mm)


All dimensions are Max unless otherwise specified.



Denotes pad 1

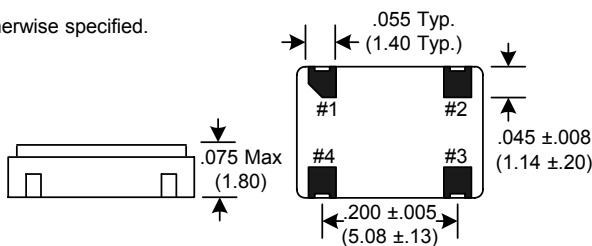


SUGGESTED PAD LAYOUT




0.01uF Bypass Capacitor Recommended

RECOMMENDED REFLOW SOLDERING PROFILE

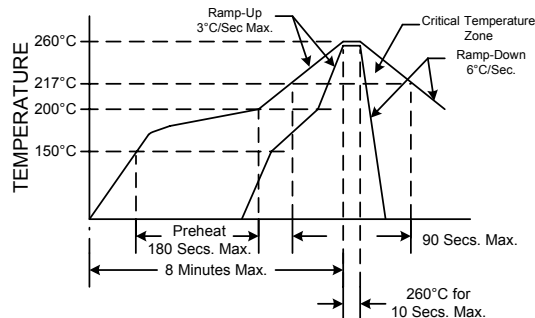

NOTE: Reflow Profile with 240°C peak also acceptable.

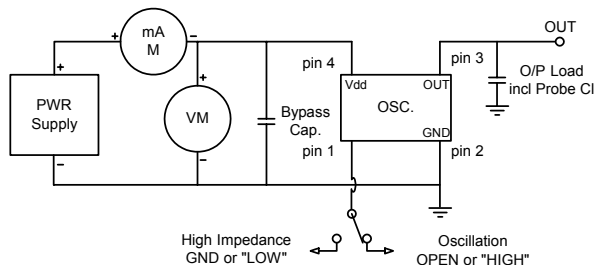

Crystek Part Number Guide

Example: C2592-44.736MHZ

Example: CE2592-44.736MHZ

Temperature		Frequency Stability
-10/ 70°C	-40/ 85°C	
C2590	CE2590	+/- 100ppm
C2592	CE2592	+/- 50ppm
C2591	CE2591	+/- 25ppm
C2598	NA	+/- 20ppm

Tri-State Function

Function pin 1	Output pin
Open	Active
"1" level 2.2V Min	Active
"0" level 0.4V Max	High Z

Specifications subject to change without notice.

TD-02062 Rev.E

Crystek Crystals Corporation

12730 Commonwealth Drive • Fort Myers, FL 33913

239.561.3311 • 800.237.3061 • FAX: 239.561.1025 • www.crystek.com

