

Plug-in Modules



查询"01BBN11"供应商

An 8 pin 'Octal' plug or an 11 pin 'Submagnal' plug with a clip-on black or transparent polycarbonate cover. Suitable for use with one to four 1/16" thick printed wiring boards (1.58" wide by 2.70" long max). For use with sockets X8 U, B8/UPM, XP11U, or B11/UPM.



Base 8 pin MP 4583
Base 11 pin MP 4580




Covers (8 or 11 pin)
Black MP 4581
Transparent MP 4595

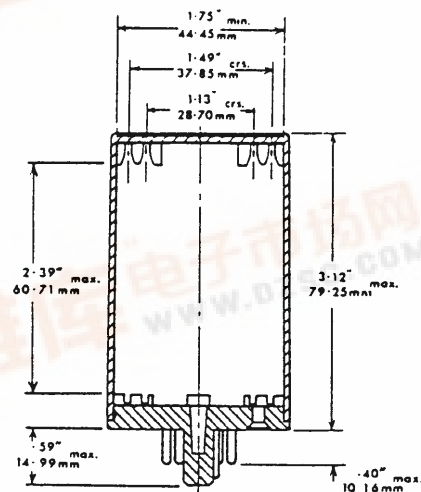




Quartz Crystal Sockets

X2/UG-TN (tin)
X2/UG-SPTDC (silver)
Moulded in Nylon PF, for crystal style 'D'
having pins .050" dia. spaced .486"
1.27 12.34

N2/UE-TN (tin) or -SPTDC (silver). Solder tails.
N2 UE P.C. - TN (tin). Printed wiring tails.
Moulded in Nylon subminiature style for crystal 'K'
having pins .040" dia. spaced .192"
1.02 4.88

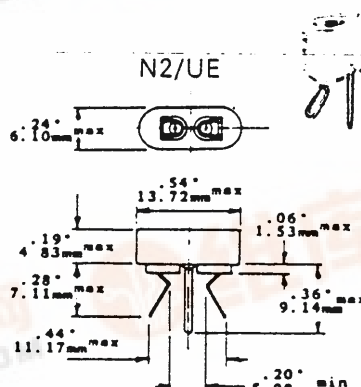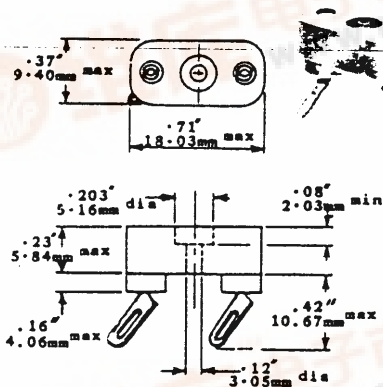

MOUNTING DETAILS



Details contained in this catalogue are correct at the time of going to press.
McMurdo reserve the right to modify the connectors without prior notification.

March 1979

The McMurdo Instrument Co Ltd

Rodney Road, Portsmouth, Hampshire PO4 8SG.
Telephone: Portsmouth 735361 (STD Code 0705) Telex 86112



duies

查询"01BBN11"供应商

3c1 + 760
3c1 + 796

or an 11 pin 'Submagal' plug with a clip-on black or transparent polycarbonate with one to four $\frac{1}{16}$ " thick printed wiring boards (1.58" wide by 2.70" long max). 3 U. 88/UPM, XP11U, or B11/UPM.



Base 8 pin MP 4583

Base 11 pin MP 4580

Covers (8 or 11 pin)


Black MP 4581

Transparent MP 4595

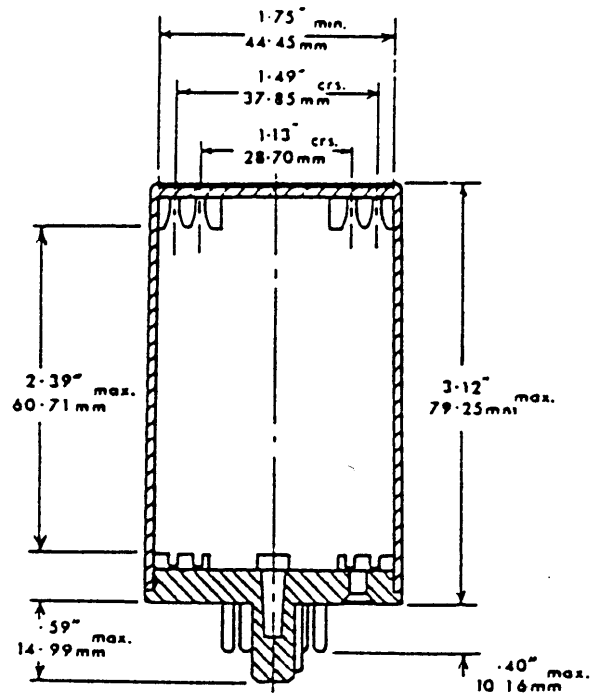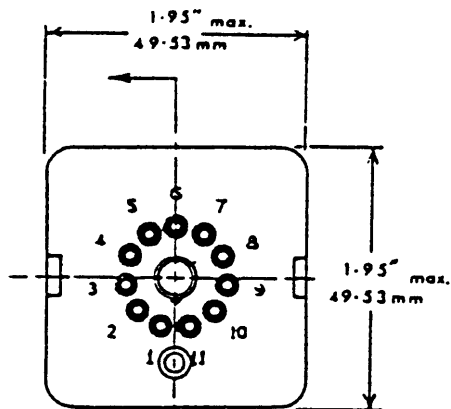


stal Sockets



N2/UE-TN (tin) or -SPTDC (silver). Solder tails.
N2 UE P.C. - TN (tin). Printed wiring tails.
Moulded in Nylon subminiature style for crystal 'K'
having pins .040" dia. spaced .192"
12-34 1-02 4-88






N2/UE

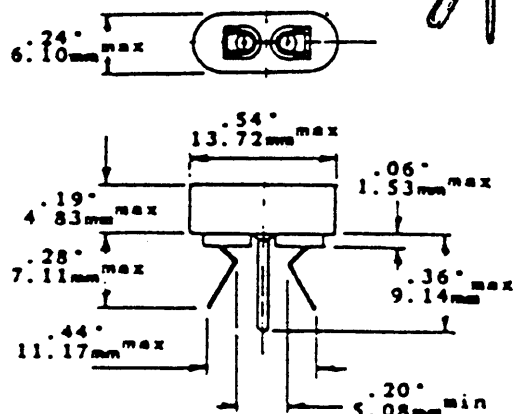

N2 UE P.C.

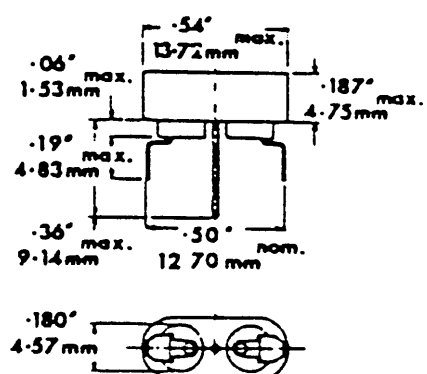



查询"01BBN11"供应商

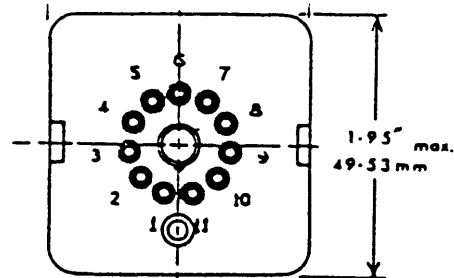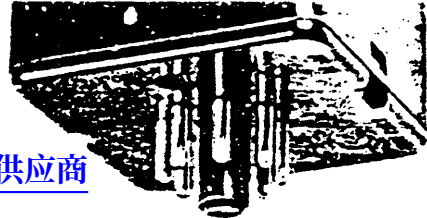



Quartz Crystal Sockets

X2/UG-TN (tin)
X2/UG-SPTDC (silver)
Moulded in Nylon PF, for crystal style 'D'
having pins .050" dia. spaced .486"
1-27 12-34

N2/UE-TN (tin) or -SPTDC
N2 UE P.C. - TN (tin). Prim
Moulded in Nylon submini
having pins .040" dia. sp
1-02

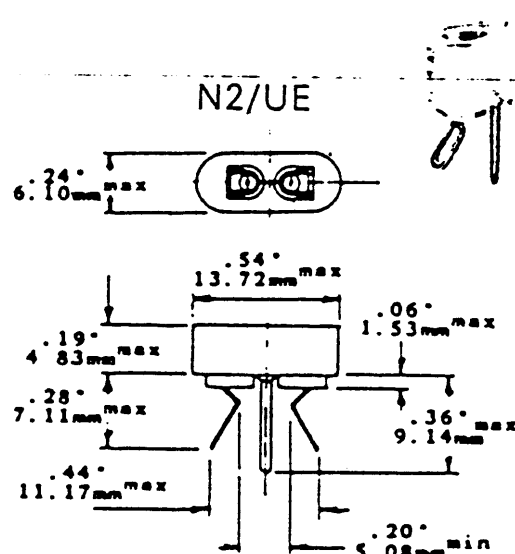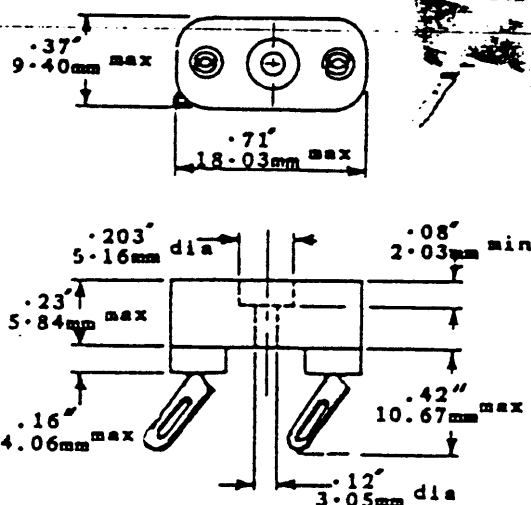

MOUNTING DETAILS



Details contained in this catalogue are correct at the time of going to press.
McMurdo reserve the right to modify the connectors without prior notification.

The McMurdo Instrument Co Ltd

Rodney Road, Portsmouth, Hampshire PO4 8SG.
Telephone: Portsmouth 735361 (STD Code 0705) Telex 86112