


## Model 4964 Cable Assembly BNC (Male) Each End, Low Noise

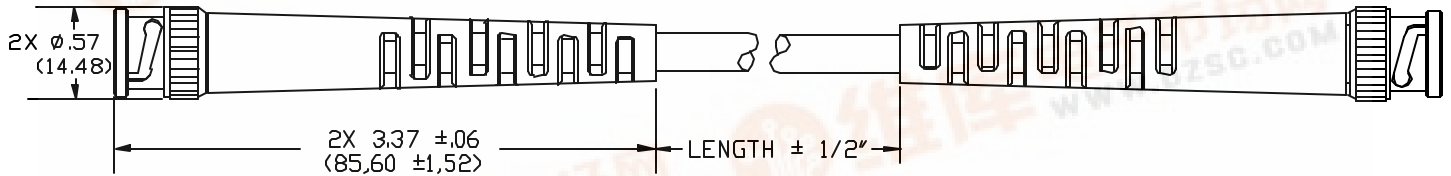

### FEATURES:

- Uses a special low-triboelectric cable which has noise attenuating layers surrounding the center conductor.
- The cable is ideal for low power, low frequency measurements.

### MATERIALS:

Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass

Dielectric: PTFE

Strain Relief: PVC molded directly to cable and connectors

Cable: 22 AWG, stranding 7 x 30 t.c., PVC insulated, 4.95 (.195) O.D.

Marking: "Pomona 4964-SS"

### RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: +50°C. (+122°F.) Max.

Nominal Impedance: 50 Ohms

Recommended Frequency Range: DC to 10KHz

### ORDERING INFORMATION: Model 4964-SS-\*

\*- Standard Lengths: 12, 24, 26, 48, 60, 96, 120, 144, 180, 240, 300, 360 – Lengths other than those specified are available on special request.

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.  
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360  
Technical Assistance: 800-241-2060

PomonaACCESS 90289 (800) 444-6785 or (425) 446-6010  
More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1