

FAIRCHILD
SEMICONDUCTOR™

October 1989
Revised August 2000

100343

Low Power 8-Bit Latch

General Description

The 100343 contains eight D-type latches, individual inputs, (D_n), outputs (Q_n), a common enable pin ($\overline{E}$), and a latch enable pin ($\overline{LE}$). A Q output follows its D input when both $\overline{E}$ and $\overline{LE}$ are LOW. When either $\overline{E}$ or $\overline{LE}$ (or both) are HIGH, a latch stores the last valid data present on its D input prior to $\overline{E}$ or $\overline{LE}$ going HIGH.

The 100343 outputs are designed to drive a 50 Ω termination resistor to -2.0V. All inputs have 50 k Ω pull-down resistors.

Features


- Low power operation
- 2000V ESD protection
- Voltage compensated operating range = -4.2V to -5.7V
- Available to industrial grade temperature range

Ordering Code:


Order Number	Package Number	Package Description
100343PC	N24E	24-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-010, 0.400 Wide
100343QC	V28A	28-Lead Plastic Lead Chip Carrier (PLCC), JEDEC MO-047, 0.450 Square
100343QI	V28A	28-Lead Plastic Lead Chip Carrier (PLCC), JEDEC MO-047, 0.450 Square Industrial Temperature Range (-40°C to +85°C)

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Logic Symbol




Connection Diagrams



Pin Descriptions

Pin Names	Description
D_0 - D_7	Data Inputs
$\overline{E}$	Enable Input
$\overline{LE}$	Latch Enable Input
Q_0 - Q_7	Data Outputs
NC	No Connect



100343

Truth Table

Inputs			Outputs
D _n	$\overline{E}$	$\overline{LE}$	Q _n
L	L	L	L
H	L	L	H
X	H	X	Latched (Note 1)
X	X	H	Latched (Note 1)


H = HIGH Voltage Level

L = LOW Voltage Level

X = Don't Care

Note 1: Retains data present before either $\overline{LE}$ or $\overline{E}$ went HIGH

Logic Diagram

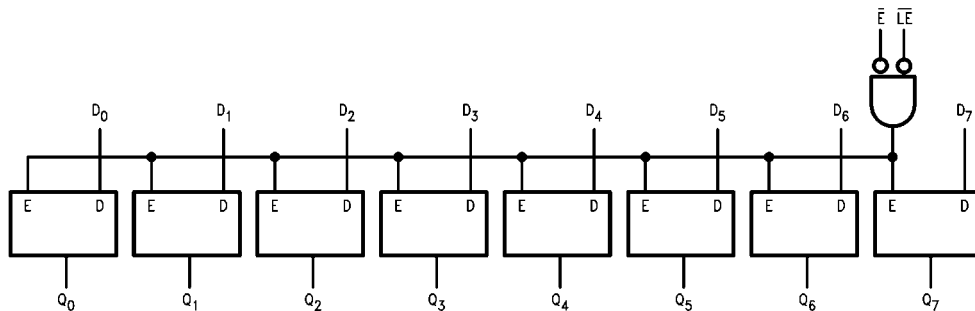

Absolute Maximum Ratings

(Note 2)

Storage Temperature (T_{STG})

-65°C to +150°C

Maximum Junction Temperature (T_J)

+150°C

V_{EE} Pin Potential to Ground Pin

-7.0V to +0.5V

Input Voltage (DC)

V_{EE} to +0.5V

Output Current (DC Output HIGH)

-50 mA

ESD (Note 3)

≥2000V

Recommended Operating Conditions

Case Temperature (T_C)

Commercial

0°C to +85°C

Industrial

-40°C to +85°C

Supply Voltage (V_{EE})

-5.7V to -4.2V

Note 2:

The “Absolute Maximum Ratings” re those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the absolute maximum rating. The “Recommended Operating Conditions” table will define the conditions for actual device operation.

Note 3:

ESD testing conforms to MIL-STD-883, Method 3015.

Commercial Version

DC Electrical Characteristics

(Note 4)

V_{EE} = -4.2V to -5.7V, V_{CC} = V_{CCA} = GND, T_C = 0°C to +85°C

Symbol	Parameter	Min	Typ	Max	Units	Conditions	
V _{OH}	Output HIGH Voltage	-1025	-955	-870	mV	V _{IN} = V _{IH} (Max)	Loading with
V _{OL}	Output LOW Voltage	-1830	-1705	-1620	mV	or V _{IL} (Min)	50Ω to -2.0V
V _{OHC}	Output HIGH Voltage	-1035			mV	V _{IN} = V _{IH} (Min)	Loading with
V _{OLC}	Output LOW Voltage			-1610	mV	or V _{IL} (Max)	50Ω to -2.0V
V _{IH}	Input HIGH Voltage	-1165		-870	mV	Guaranteed HIGH Signal for All Inputs	
V _{IL}	Input LOW Voltage	-1830		-1475	mV	Guaranteed LOW Signal for All Inputs	
I _{IL}	Input LOW Current	0.50			μA	V _{IN} = V _{IL} (Min)	
I _{IH}	Input HIGH Current			240	μA	V _{IN} = V _{IH} (Max)	
I _{EE}	Power Supply Current					Inputs Open	
		-95		-55	mA	V _{EE} = -4.2V to -4.8V	
		-97		-55		V _{EE} = -4.2V to -5.7V	

Note 4:

The specified limits represent the “worst case” value for the parameter. Since these values normally occur at the temperature extremes, additional noise immunity and guardbanding can be achieved by decreasing the allowable system operating ranges. Conditions for testing shown in the tables are chosen to guarantee operation under “worst case” conditions.

AC Electrical Characteristics

V_{EE} = -4.2V to -5.7V, V_{CC} = V_{CCA} = GND

Symbol	Parameter	T _C = 0°C		T _C = +25°C		T _C = +85°C		Units	Conditions
		Min	Max	Min	Max	Min	Max		
t _{PLH}	Propagation Delay	0.80	2.00	0.80	2.00	0.80	2.20	ns	Figures 1, 2, 3 (Note 5)
t _{PHL}	D _n to Output								
t _{PLH}	Propagation Delay	1.40	2.90	1.40	2.90	1.60	3.10	ns	Figures 1, 2, 3 (Note 5)
t _{PHL}	LE, E to Output								
t _{TLH}	Transition Time	0.45	2.00	0.45	2.00	0.45	2.00	ns	Figures 1, 3
t _{THL}	20% to 80%, 80% to 20%								
t _S	Setup Time	D ₀ -D ₇	1.0	1.0	1.1	ns	Figures 1, 4		
t _H	Hold Time	D ₀ -D ₇	0.1	0.1	0.1	ns	Figures 1, 4		
t _{PW(H)}	Pulse Width HIGH	LE, E	2.00	2.00	2.00	ns	Figures 1, 4		

Note 5:

The propagation delay specified is for single output switching. Delays may vary up to 300 ps with multiple outputs switching.

100343

Commercial Version (Continued) PLCC AC Electrical Characteristics

$V_{EE} = -4.2V$ to $-5.7V$, $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_C = 0^\circ C$		$T_C = +25^\circ C$		$T_C = +85^\circ C$		Units	Conditions
		Min	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay D_n to Output	0.80	1.80	0.80	1.80	0.80	2.00	ns	Figures 1, 2, 3 (Note 6)
t_{PLH} t_{PHL}	Propagation Delay $\overline{LE}$, $\overline{E}$ to Output	1.40	2.70	1.40	2.70	1.60	2.90	ns	Figures 1, 2, 3 (Note 6)
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	0.45	1.90	0.45	1.90	0.45	1.90	ns	Figures 1, 3
t_S	Setup Time D_0-D_7	0.90		0.90		1.00		ns	Figures 1, 4
t_H	Hold Time D_0-D_7	0.0		0.0		0.0		ns	Figures 1, 4
$t_{PW(H)}$	Pulse Width HIGH $\overline{LE}$, $\overline{E}$	2.00		2.00		2.00		ns	Figures 1, 4
t_{OSHL}	Maximum Skew Common Edge Output-to-Output Variation Data to Output Path		340		340		340	ps	PLCC Only (Note 7)
t_{OSLH}	Maximum Skew Common Edge Output-to-Output Variation Data to Output Path		440		440		440	ps	PLCC Only (Note 7)
t_{OST}	Maximum Skew Opposite Edge Output-to-Output Variation Data to Output Path		480		480		480	ps	PLCC Only (Note 7)
t_{PS}	Maximum Skew Pin (Signal) Transition Variation Data to Output Path		300		300		300	ps	PLCC Only (Note 7)

Note 6: The propagation delay specified is for single output switching. Delays may vary up to 300 ps with multiple outputs switching.

Note 7: Output-to-Output Skew is defined as the absolute value of the difference between the actual propagation delay for any outputs within the same packaged device. The specifications apply to any outputs switching in the same direction either HIGH-to-LOW (t_{OSHL}), or LOW-to-HIGH (t_{OSLH}), or in opposite directions both HL and LH (t_{OST}). Parameters t_{OST} and t_{PS} guaranteed by design.

Industrial Version

PLCC DC Electrical Characteristics (Note 8)

$V_{EE} = -4.2V$ to $-5.7V$, $V_{CC} = V_{CCA} = GND$, $T_C = -40^{\circ}C$ to $+85^{\circ}C$

Symbol	Parameter	$T_C = -40^{\circ}C$		$T_C = 0^{\circ}C$ to $+85^{\circ}C$		Units	Conditions	
		Min	Max	Min	Max			
V_{OH}	Output HIGH Voltage	-1085	-870	-1025	-870	mV	$V_{IN} = V_{IH} (Max)$	Loading with 50Ω to -2.0V
V_{OL}	Output LOW Voltage	-1830	-1575	-1830	-1620	mV	or $V_{IL} (Min)$	
V_{OHC}	Output HIGH Voltage	-1095		-1035		mV	$V_{IN} = V_{IH} (Min)$	Loading with 50Ω to -2.0V
V_{OLC}	Output LOW Voltage		-1565		-1610	mV	or $V_{IL} (Max)$	
V_{IH}	Input HIGH Voltage	-1170	-870	-1165	-870	mV	Guaranteed HIGH Signal for All Inputs	
V_{IL}	Input LOW Voltage	-1830	-1480	-1830	-1475	mV	Guaranteed LOW Signal for All Inputs	
I_{IL}	Input LOW Current	0.50		0.50		μA	$V_{IN} = V_{IL} (Min)$	
I_{IH}	Input HIGH Current		240		240	μA	$V_{IN} = V_{IH} (Max)$	
I_{EE}	Power Supply Current					mA	Inputs Open	
		-95	-50	-95	-55		$V_{EE} = -4.2V$ to $-4.8V$	
		-97	-50	-97	-55		$V_{EE} = -4.2V$ to $-5.7V$	

Note 8: The specified limits represent the "worst case" value for the parameter. Since these values normally occur at the temperature extremes, additional noise immunity and guardbanding can be achieved by decreasing the allowable system operating ranges. Conditions for testing shown in the tables are chosen to guarantee operation under "worst case" conditions.

PLCC AC Electrical Characteristics


$V_{EE} = -4.2V$ to $-5.7V$, $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_C = -40^{\circ}C$		$T_C = +25^{\circ}C$		$T_C = +85^{\circ}C$		Units	Conditions
		Min	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	0.80	1.80	0.80	1.80	0.80	2.00	ns	Figures 1, 2, 3 (Note 9)
t_{PHL}	D_n to Output								
t_{PLH}	Propagation Delay	1.40	2.70	1.40	2.70	1.60	2.90	ns	Figures 1, 2, 3 (Note 9)
t_{PHL}	$\overline{LE}$, $\overline{E}$ to Output								
t_{TLH}	Transition Time	0.40	2.50	0.45	1.90	0.45	1.90	ns	Figures 1, 3
t_{THL}	20% to 80%, 80% to 20%								
t_s	Setup Time D_0-D_7	0.60		0.90		1.00		ns	Figures 1, 4
t_H	Hold Time D_0-D_7	0.8		0.0		0.0		ns	Figures 1, 4
$t_{pw(H)}$	Pulse Width HIGH $\overline{LE}$, $\overline{E}$	2.40		2.00		2.00		ns	Figures 1, 4

Note 9: The propagation delay specified is for single output switching. Delays may vary up to 300 ps with multiple outputs switching.

100343

Test Circuitry

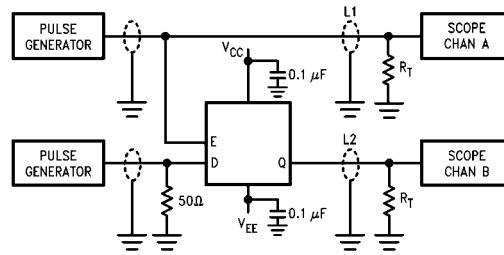

Note:

- $V_{CC}, V_{CCA} = +2V, V_{EE} = -2.5V$
- L1 and L2 = equal length 50Ω impedance lines
- $R_T = 50\Omega$ terminator internal to scope
- Decoupling 0.1 μF from GND to V_{CC} and V_{EE}
- All unused outputs are loaded with 50Ω to GND
- C_L = Fixture and stray capacitance ≤ 3 pF

FIGURE 1. AC Test Circuit

Switching Waveforms

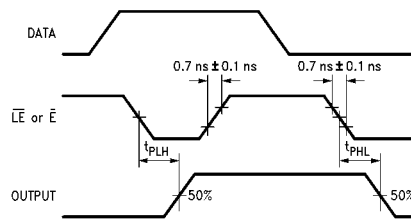


FIGURE 2. Propagation Delays

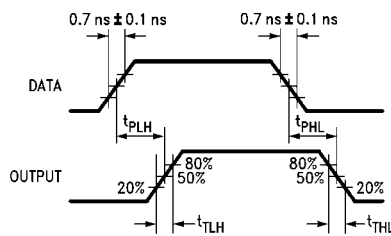


FIGURE 3. Propagation and Transition Times


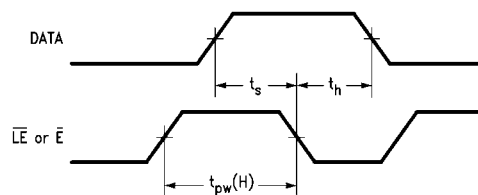


FIGURE 4. Setup, Hold and Pulse Width Times



Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

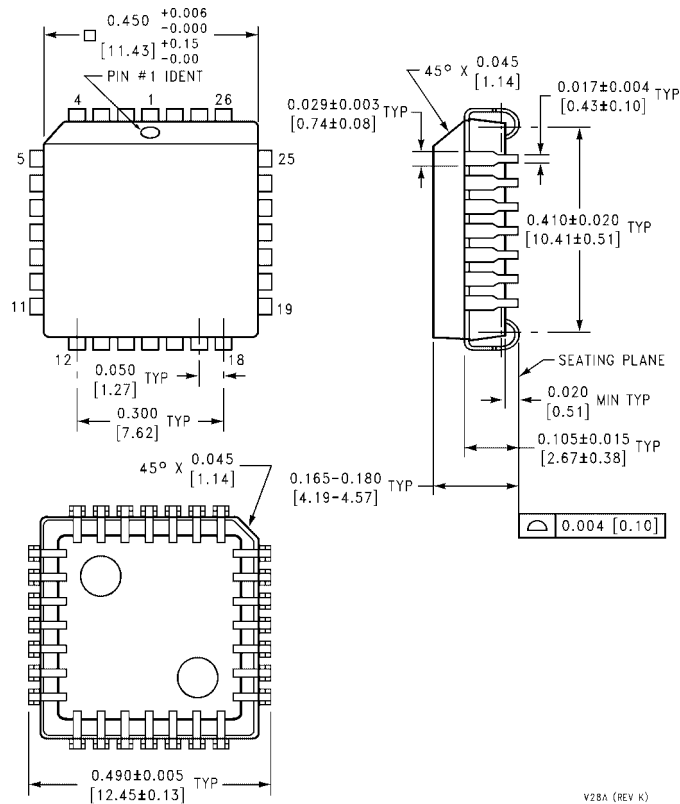

**28-Lead Plastic Lead Chip Carrier (PLCC), JEDEC MO-047, 0.450 Square
Package Number V28A**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com