

International IRF Rectifier

47CTQ020SPbF 47CTQ020-1PbF

SCHOTTKY RECTIFIER

40 Amp

$$I_{F(AV)} = 40\text{Amp}$$

$$V_R = 20\text{V}$$

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	40	A
V_{RRM}	20	V
I_{FSM} @tp=5 μ s sine	1000	A
V_F @20Apk, $T_J = 125^\circ\text{C}$	0.34	V
T_J	-55 to 150	$^\circ\text{C}$


Description/ Features

This center tap Schottky rectifier has been optimized for ultra low forward voltage drop specifically for 3.3V output power supplies. The proprietary barrier technology allows for reliable operation up to 150 $^\circ\text{C}$ junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 150 $^\circ\text{C}$ T_J operation
- Center tap configuration
- Optimized for 3.3V application
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Lead-Free ("PbF" suffix)


Case Styles

47CTQ020SPbF



D²PAK

47CTQ020-1PbF



TO-262

47CTQ020SPbF, 47CTQ020-1PbF

Bulletin PD-21038 rev. A 07/06



Voltage Ratings

Part number	47CTQ020SPbF, 47CTQ020-1PbF		
V_R Max. DC Reverse Voltage (V)	@ 125° C	20	
V_R Max. DC Reverse Voltage (V)	@ 150° C	10	

Absolute Maximum Ratings

Parameters	47CTQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Device) (Per Leg)	40	A	50% duty cycle @ $T_C = 135^\circ\text{C}$, rectangular wave form
	20		
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg)	1000	A	5 μs Sine or 3 μs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V_{RM} applied
	250		
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	18	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 3\text{Amps}$, $L = 3\text{mH}$
I_{AR} Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	47CTQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) (1)	0.45	V	@ 20A $T_J = 25^\circ\text{C}$
	0.51	V	@ 40A $T_J = 25^\circ\text{C}$
	0.34	V	@ 20A $T_J = 125^\circ\text{C}$
	0.44	V	@ 40A $T_J = 125^\circ\text{C}$
	0.31	V	@ 20A $T_J = 150^\circ\text{C}$
	0.42	V	@ 40A $T_J = 150^\circ\text{C}$
I_{RM} Max. Reverse Leakage Current (Per Leg) (1)	3	mA	$T_J = 25^\circ\text{C}$ $V_R = \text{rated } V_R$
	310	mA	$T_J = 125^\circ\text{C}$ $V_R = \text{rated } V_R$
	60	mA	$T_J = 125^\circ\text{C}$ $V_R = 5\text{V}$
	45	mA	$T_J = 125^\circ\text{C}$ $V_R = 3.3\text{V}$
	306	mA	$T_J = 150^\circ\text{C}$ $V_R = 10\text{V}$
$V_{F(TO)}$ Threshold Voltage	0.188	V	$T_J = T_J \text{ max.}$
r_t Forward Slope Resistance	5.9	m Ω	
C_T Max. Junction Capacitance (Per Leg)	3000	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance (Per Leg)	5.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	10000	V/ μs	(Rated V_R)

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	47CTQ	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	1.5	$^\circ\text{C/W}$	DC operation
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.75	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased (only for TO-220)
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min. 6 (5)	Kg-cm (lbf-in)	
	Max. 12 (10)		
Marking Device	47CTQ020S	Case style D ² Pak	
	47CTQ020-1	Case style TO-262	

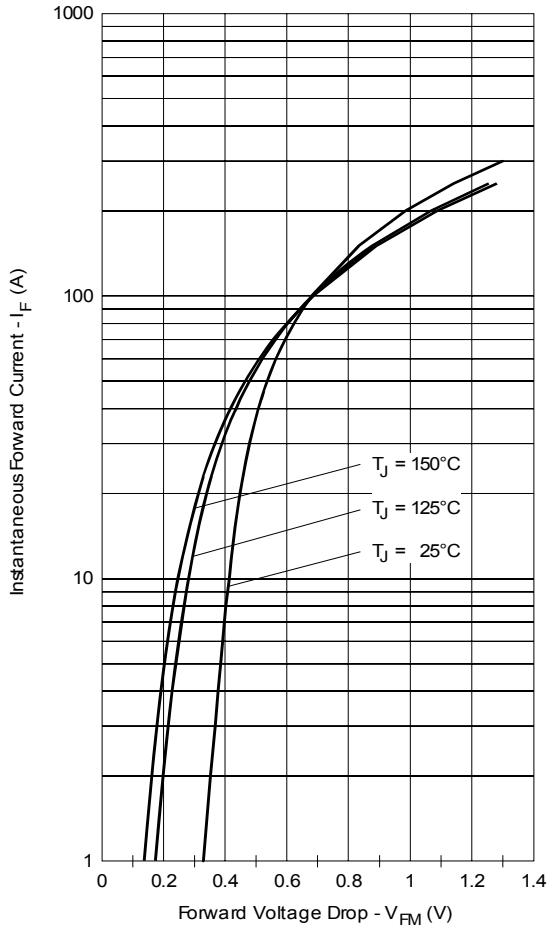


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

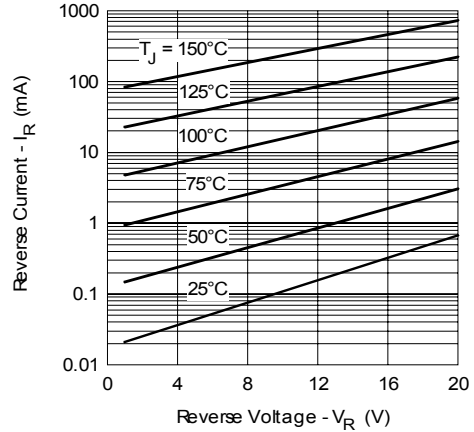


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

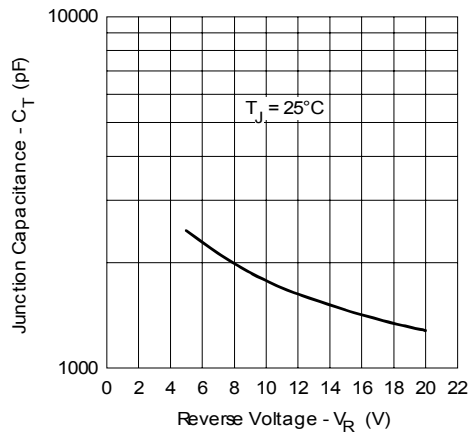


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

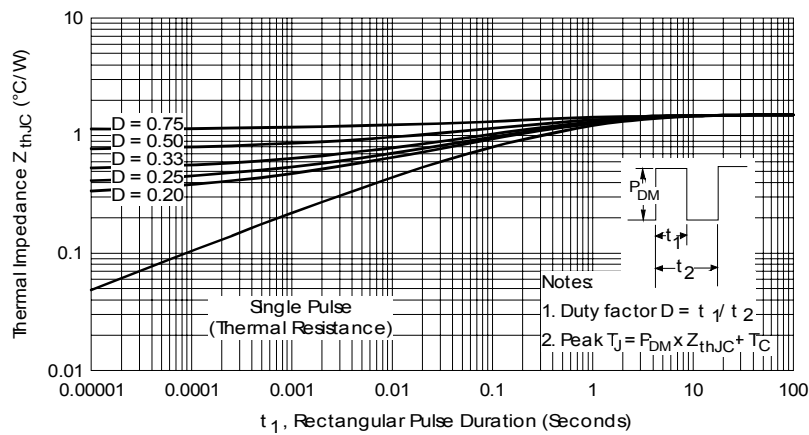


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

47CTQ020SPbF, 47CTQ020-1PbF
Bulletin PD-21038 rev. A 07/06

International
IR Rectifier

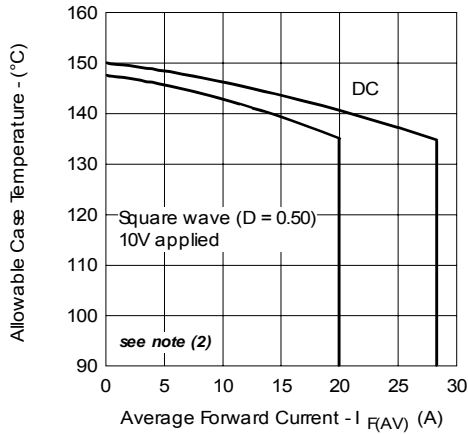


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

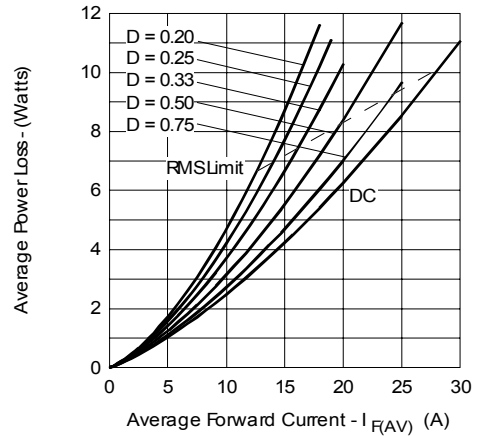


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

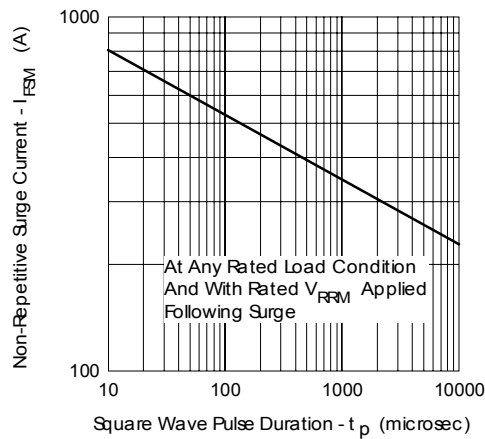


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

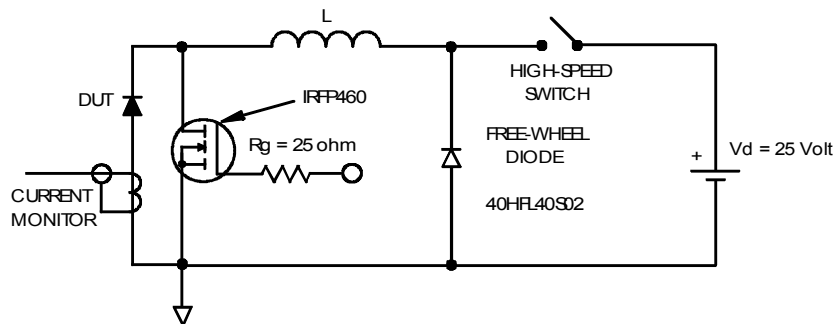


Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$

$P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_{R1} (1 - D); I_{R1} @ V_{R1} = 10 \text{ V}$

Outlines Table

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES]
3. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.127 [0.005"] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
4. DIMENSION b1 AND c1 APPLY TO BASE METAL ONLY.
5. CONTROLLING DIMENSION: INCH.

SYMBOL	DIMENSIONS				NOTES	
	MILLIMETERS		INCHES			
	MIN.	MAX.	MIN.	MAX.		
A	4.06	4.83	.160	.190	4	
A1	0.00	0.254	.000	.010		
b	0.51	0.99	.020	.039		
b1	0.51	0.89	.020	.035		
b2	1.14	1.78	.045	.070		
c	0.38	0.74	.015	.029		
c1	0.38	0.58	.015	.023		
c2	1.14	1.65	.045	.065		
D	8.51	9.65	.335	.380		3
D1	6.86		.270			
E	9.65	10.67	.380	.420		3
E1	6.22		.245			
e	2.54 BSC		.100 BSC			
H	14.61	15.88	.575	.625		
L	1.78	2.79	.070	.110		
L1		1.65		.065		
L2	1.27	1.78	.050	.070		
L3	0.25 BSC		.010 BSC			
L4	4.78	5.28	.188	.208		
m	17.78		.700			
m1	8.89		.350			
n	11.43		.450			
o	2.08		.082			
p	3.81		.150			
R	0.51	0.71	.020	.028		
θ	90°	93°	90°	93°		

LEAD ASSIGNMENTS
HEXFET
1.- GATE
2, 4.- DRAIN
3.- SOURCE

IGBTs_CoPACK
1.- GATE
2, 4.- COLLECTOR
3.- EMITTER

DIODES
1.- ANODE *
2, 4.- CATHODE
3.- ANODE

* PART DEPENDENT.

Conform to JEDEC outline D²Pak (SMD-220)
Dimensions in millimeters and (inches)

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES]
3. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.127 [0.005"] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
4. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSION E, L1, D1 & E1.
5. DIMENSION b1 AND c1 APPLY TO BASE METAL ONLY.
6. CONTROLLING DIMENSION: INCH.
7.- OUTLINE CONFORM TO JEDEC TO-262 EXCEPT A1(max.), b(min.) AND D1(min.) WHERE DIMENSIONS DERIVED THE ACTUAL PACKAGE OUTLINE.

SYMBOL	DIMENSIONS				NOTES	
	MILLIMETERS		INCHES			
	MIN.	MAX.	MIN.	MAX.		
A	4.06	4.83	.160	.190	5	
A1	2.03	3.02	.080	.119		
b	0.51	0.99	.020	.039		
b1	0.51	0.89	.020	.035		
b2	1.14	1.78	.045	.070		
b3	1.14	1.75	.045	.068		
c	0.38	0.74	.015	.029		
c1	0.38	0.58	.015	.023		
c2	1.14	1.65	.045	.065		
D	8.38	9.65	.330	.380		3
D1	6.86		.270			
E	9.65	10.67	.380	.420		3,4
E1	6.22		.245			
e	2.54 BSC		.100 BSC			
L	13.46	14.10	.530	.555	4	
L1		1.65		.065		
L2	3.56	3.71	.140	.146		

LEAD ASSIGNMENTS
HEXFET
1.- GATE
2.- DRAIN
3.- SOURCE
4.- DRAIN

IGBTs_CoPACK
1.- GATE
2.- COLLECTOR
3.- EMITTER
4.- COLLECTOR

Modified JEDEC outline TO-262
Dimensions in millimeters and (inches)

47CTQ020SPbF, 47CTQ020-1PbF
 Bulletin PD-21038 rev. A 07/06



Part Marking Information

D²PAK

EXAMPLE: THIS IS A 47CTQ020S
 LOT CODE 8024
 ASSEMBLED ON WW 02, 2000

Note: "P" in assembly line position indicates "Lead-Free"

INTERNATIONAL RECTIFIER LOGO
 PART NUMBER
 DATE CODE
 YEAR 0 = 2000
 WEEK 02
 P = LEAD-FREE

ASSEMBLY LOT CODE

TO-262

EXAMPLE: THIS IS A 47CTQ020-1
 LOT CODE 1789
 ASSEMBLED ON WW 19, 2002

Note: "P" in assembly line position indicates "Lead-Free"

INTERNATIONAL RECTIFIER LOGO
 PART NUMBER
 DATE CODE
 YEAR 2 = 2002
 WEEK 19
 P = LEAD-FREE

ASSEMBLY LOT CODE

Tape & Reel Information

SECTION Y-Y

Ao	10.50	+/- 0.1
Bo	15.80	+/- 0.1
B2	10.25	+/- 0.1
Ko	4.90	+/- 0.1
F	11.50	+/- 0.1
P1	16.00	+/- 0.1
W	24.00	+/- 0.3

NOTES:

- 1.0 SPROCKET HOLE PITH CUMULATIVE TOLERANCE ±.02
- 2.0 CAMBER NOT TO EXCEED 1mm in 100mm
- 3.0 MATERIAL: CONDUCTIVE BLACK STYRENIC ALLOY
- 4.0 Ko MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
- 5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
- 6.0 VENDOR: (OPTIONAL)
- 7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
- 8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10⁶ OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
- 9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
- 10.0 © CRITICAL

Dimensions in millimeters and (inches)

Ordering Information Table

Device Code	
47	C
T	Q
020	S
TRL	PbF
①	②
③	④
⑤	⑥
⑦	⑧

1	-	Current Rating (40A)
2	-	Circuit Configuration C = Common Cathode
3	-	T = TO-220
4	-	Schottky "Q" Series
5	-	Voltage Rating (020 = 20V)
6	-	• S = D ² Pak • -1= TO-262
7	-	• none = Tube (50 pieces) • TRL = Tape & Reel (Left Oriented - for D ² Pak only) • TRR = Tape & Reel (Right Oriented - for D ² Pak only)
8	-	• none = Standard Production • PbF = Lead-Free

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.