


[查询"4778803"供应商](#)

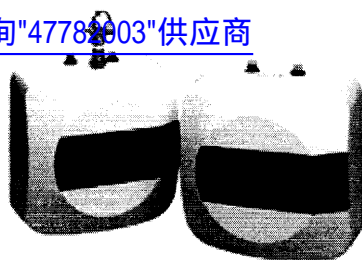

MW & EW Series

Redring offer two ranges of small unvented water storage heaters, the MW series and the EW series. The MW series is complete with factory fitted temperature and pressure relief valve and conforms to BEAB standards.

The EW series is designed to conform to the latest BS EN which does not require the factory fitting of a temperature and pressure relief valve. However, where the specification requires, this valve can still be fitted by the installer using the optional kit.

All units are WRC approved.

- [Installation Details](#)
- [Order Information](#)
- [Optional Accessories](#)

User Features

- Will deliver hot water to as many as four outlets
- Balanced supply of hot and cold water
- Heat loss minimisation and energy savings from short pipe runs and superior insulation
- Water outlet via existing tap or mixer
- Adjustable thermostat to 70°C
- Over temperature safety cut-out
- Temperature pressure relief valve factory fitted to all MW models and available as accessory for EW range
- Neon light indicates when heater is working
- Compact shape for undersink mounting
- Remote siting possible

Order Reference		
Name	Short Code	Model No.
MW10 Undersink	MW10	47-782001
MW15 Undersink	MW15	47-782101
MW10H Oversink	MW10H	47-781001
MW15H Oversink	MW15H	47-781101
EW10 Undersink	EW10	47-784501
EW15 Undersink	EW15	47-784502

Installer Specifications

Model	kW loading @240/230V	Capacity	Rec. cable rating	Rec. fuse rating
MW10	3	10 litres	1.5 mm ²	13 amps
MW15	3	15 litres	1.5 mm ²	13 amps
EW10	3	10 litres	1.5 mm ²	13 amps
EW15	3	15 litres	1.5 mm ²	13 amps

Operating water pressure 1 - 12 BAR (above 6 BAR use cold water controls pack) - Inlet/outlet connections 15mm (1/2" BSP) - Vitreous enamelled steel water container, white thermoplastic cover and foamed polyurethane insulation - Fixing pack with wall mounting bracket supplied - Magnesium sacrificial anode replaceable by front access

Unit Dimensions

MW10 / MW10H / EW10	HEIGHT 360mm WIDTH 360mm DEPTH 254mm
MW10 / MW10H / EW10	HEIGHT 360mm WIDTH 360mm DEPTH 300mm

Installation must be carried out by a competent installer

Accessories

Accessory	Catalogue No.	Description
Optional cold water controls	87-783101	Use with water supply pressures above 6 BAR*
Tundish	87-783101	For use with EW 10 and 15 litre models
Temperature and pressure relief valve kit	87-783101	For use with EW 10 and 15 litre models
THERMOSTATIC BLENDING VALVES - Increasingly used to ensure a safe maximum dispensing temperature for hot water providing protection for end users. Quickly and easily fitted to the outlet from the hot water system and the cold water feed.		
Blending valve	87-783102	
Blending valve fail safe	87-783103	

* Or where cold water supply pipe is not long enough to accommodate expansion of hot water i.e. MW15 - less than 4.5m of 15mm pipe, MW10 - less than 3m of 15mm pipe

MW Approvals

BS EN



EW Approvals

