

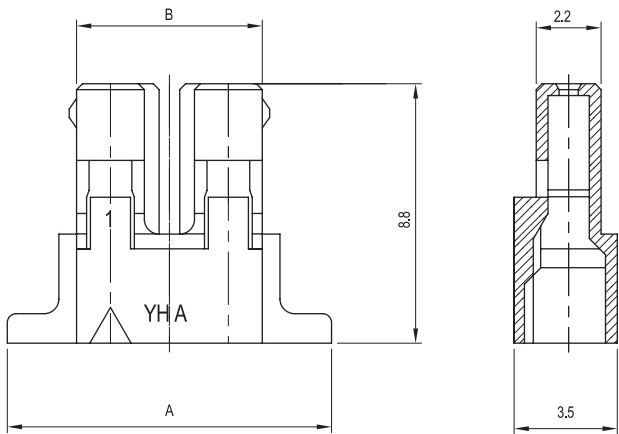



[查询"40006HS"供应商](#)


4.00mm (0.157") PITCH CONNECTOR

Wire-to-Board
Housing

40006HS Series

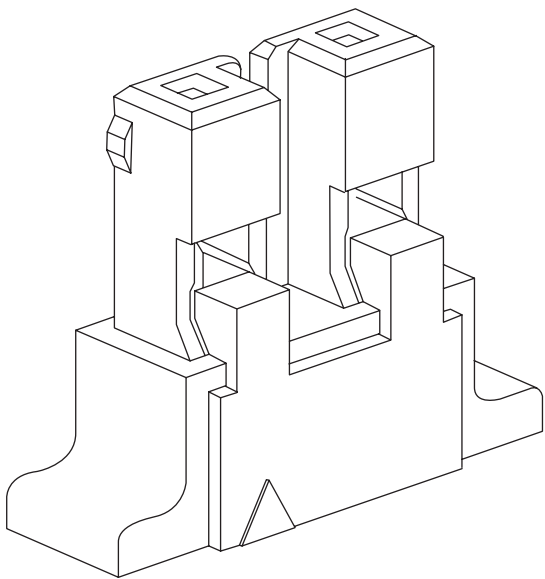

TERMINAL ASSEMBLY DRAWING



AWG : #22 ~ #28

Material

I/NO	DESCRIPTION	TITLE	MATERIAL
1	HOUSING	40006HS	PA66, UL94 V Grade

Available Pin

PARTS NO.	DIM. A	DIM. B
40006HS-02A00	11.0	6.3

Specification

ITEM	SPEC
Voltage Rating	AC/DC 600V
Current Rating	AC/DC 1A
Operating Temperature	-25℃~+85℃
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC1800V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	AWG #20~#24
Applicable P.C.B	-
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-

Application Terminal : 20015TS (73 page)