

INDEXED HANDLES

[查询"28104-M10"供应商](#)

TYPE

PATTERN


 **B**  **C** **D** **E** **F**

THREAD

LENGTH OF  
MALE THREAD

14 Cranking handle with folding side handle - high impact resistant


Matt finish reinforced thermoplastic

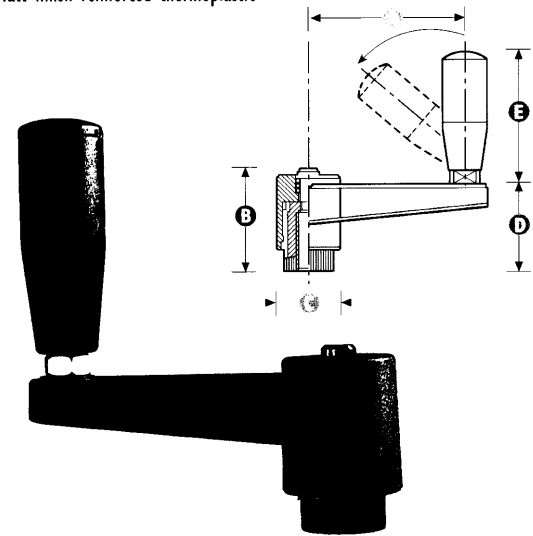

FEMALE	5465	65	45	27	36	56	M8	M10	M12
Plated steel insert	5480	80	52	34	46	75	M10	M12	M14
	54110	110	52	34	47	75	M12	M14	M16

Clamping handle - high impact resistant

Matt finish reinforced thermoplastic

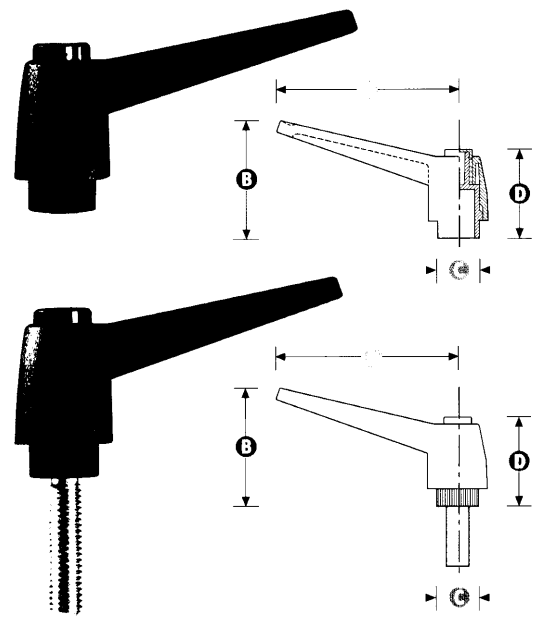

FEMALE	2843	43	32	12	26	M4	M5	M6						
Brass insert	2865	65	46	15	37	M6	M8							
	2883	83	57	19	46	M8	M10							
	28104	104	68	24	51	M10	M12	M16						
MALE	2843/M	43	32	12	26	M5	M6				15	20	25	
Plated steel insert	2865/M	65	46	15	37	M8					20	30	40	50
	2883/M	83	57	19	46	M10					30	35	40	50
	28104/M	104	68	24	51	M12	M16				30	35	50	

Also available:  
Stainless steel insert  
Orange safety handle



Operated by a simple lift and rotate movement, all handles include a ratchet for use in tight spaces and the clamping handles are supplied with a comfortable plastic cap as opposed to the usual steel set screw, offering complete electrical insulation for the operator - adjust by pushing the red button and then 'park' the handle in the desired safety position.

Most patterns are available with imperial threads (Whitworth) or bores

TYPE

PATTERN

 **B**  **C** **D** **E** **F**

THREAD

LENGTH OF  
MALE THREAD

Non standard thread diameters, lengths, insert materials and other modifications are available for minimum quantities. The standard colour is black with a red button. Some patterns are available in a choice of colours. Contact our sales department for details.

All dimensions in mm and are approximate