

General Description

The MIC861 is a rail-to-rail output, input common-mode to ground, operational amplifier in *Teeny™* SC70 packaging. The MIC861 provides 400kHz gain-bandwidth product while consuming an incredibly low 4.6µA supply current.

The SC70 packaging achieves significant board space savings over devices packaged in SOT-23 or MSOP-8 packaging. The SC70 occupies approximately half the board area of a SOT-23 package.

Features

- *Teeny™* SC70 packaging
- 400kHz gain-bandwidth product
- 650kHz, –3dB bandwidth
- 4.6µA supply current
- Rail-to-Rail output
- Ground sensing at input (common mode to GND)
- Drives large capacitive loads (1000pF)
- Unity gain stable


Applications

- Portable equipment
- PDAs
- Pagers
- Cordless Phones
- Consumer Electronics


Ordering Information

Part Number	Marking	Ambient Temp. Range*	Package
MIC861BC5	A33	–40°C to +85°C	SC70-5

Pin Configuration

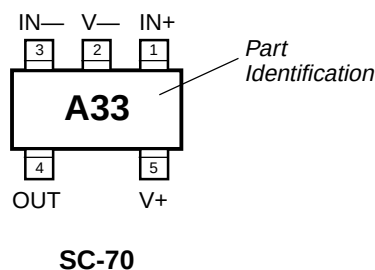

Functional Pinout



Absolute Maximum Ratings (Note 1)

Supply Voltage ($V_+ - V_-$) +6.0V
 Differential Input Voltage ($|V_{IN+} - V_{IN-}|$), Note 4 +6.0V
 Input Voltage ($V_{IN+} - V_{IN-}$) $V_+ + 0.3V$, $V_- - 0.3V$
 Lead Temperature (soldering, 5 sec.) 260°C
 Output Short Circuit Current Duration Indefinite
 Storage Temperature (T_S) 150°C
 ESD Rating, **Note 3**

Operating Ratings (Note 2)

Supply Voltage ($V_+ - V_-$) +2.43V to +5.25V
 Ambient Temperature Range -40°C to +85°C
 Package Thermal Resistance 450°C/W

Electrical Characteristics

$V_+ = +2.7V$, $V_- = 0V$, $V_{CM} = V_+/2$; $R_L = 500k\Omega$ to $V_+/2$; $T_A = 25^\circ C$, unless otherwise noted. **Bold** values indicate $-40^\circ C \leq T_A \leq +85^\circ C$.

Symbol	Parameter	Condition	Min	Typ	Max	Units
V_{OS}	Input Offset Voltage	Note 5	-10	2	10	mV
	Input Offset Voltage Temp Coefficient			15		$\mu V/^\circ C$
I_B	Input Bias Current			20		pA
I_{OS}	Input Offset Current			10		pA
V_{CM}	Input Voltage Range	CMRR > 60dB		1.8		V
CMRR	Common-Mode Rejection Ratio	$0 < V_{CM} < 1.35V$	45	77		dB
PSRR	Power Supply Rejection Ratio	Supply voltage change of 3V	50	83		dB
A_{VOL}	Large-Signal Voltage Gain	$R_L = 100k$, V_{OUT} 2V peak to peak	60	74		dB
		$R_L = 500k$, V_{OUT} 2V peak to peak	73	83		dB
V_{OUT}	Maximum Output Voltage Swing	$R_L = 500k$	$V_+ - 2mV$	$V_+ - 0.7mV$		V
V_{OUT}	Minimum Output Voltage Swing	$R_L = 500k$		$V_- + 0.2mV$	$V_- + 2mV$	V
GBW	Gain-Bandwidth Product	$R_L = 200k\Omega$, $C_L = 2pF$, $V_{OUT} = 0$		350		kHz
BW	-3dB Bandwidth	$A_V = 1$, $C_L = 2pF$, $R_L = 1M\Omega$		500		kHz
SR	Slew Rate	$A_V = 1$, $C_L = 2pF$, $R_L = 1M\Omega$		0.12		V/ μs
I_{SC}	Short-Circuit Output Current	Source		6		mA
		Sink		5		mA
I_S	Supply Current	No Load		4.2	9	μA

$V_+ = +5V$, $V_- = 0V$, $V_{CM} = V_+/2$; $R_L = 500k\Omega$ to $V_+/2$; $T_A = 25^\circ C$, unless otherwise noted. **Bold** values indicate $-40^\circ C \leq T_A \leq +85^\circ C$.

V_{OS}	Input Offset Voltage	Note 5	-10	2	10	mV
	Input Offset Voltage Temp Coefficient			15		$\mu V/^\circ C$
I_B	Input Bias Current			20		pA
I_{OS}	Input Offset Current			10		pA
V_{CM}	Input Voltage Range	CMRR > 60dB		4.2		V
CMRR	Common-Mode Rejection Ratio	$0 < V_{CM} < 3.5V$	60	80		dB
PSRR	Power Supply Rejection Ratio	Supply voltage change of 1V	45	85		dB
A_{VOL}	Large-Signal Voltage Gain	$R_L = 100k$, V_{OUT} 4.0V peak to peak	60	76		dB
		$R_L = 500k$, V_{OUT} 4.0V peak to peak	68	83		dB
V_{OUT}	Maximum Output Voltage Swing	$R_L = 500k$	$V_+ - 2mV$	$V_+ - 0.7mV$		V
V_{OUT}	Minimum Output Voltage Swing	$R_L = 500k$		$V_- + 0.7mV$	$V_- + 2mV$	V
GBW	Gain-Bandwidth Product	$R_L = 200k\Omega$, $C_L = 2pF$, $V_{OUT} = 0$		400		kHz
BW	-3dB Bandwidth	$A_V = 1$, $C_L = 2pF$, $R_L = 1M\Omega$		650		kHz

Symbol	Parameter	Condition	Min	Typ	Max	Units
SR	Slew Rate	$A_V = 1$, $C_L = 2\text{pF}$, $R_L = 1\text{M}\Omega$		0.12		V/ μs
I_{SC}	Short-Circuit Output Current	Source	10	24		mA
		Sink	10	24		mA
I_S	Supply Current	No Load		4.6	9	μA

Note 1. Exceeding the absolute maximum rating may damage the device.

Note 2. The device is not guaranteed to function outside its operating rating.






Note 3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF. Pin 4 is ESD sensitive

Note 4. Exceeding the maximum differential input voltage will damage the input stage and degrade performance (in particular, input bias current is likely to increase).

Note 5. The offset voltage distribution is centered around 0V. The typical offset number shown, is equal to the standard deviation of the voltage offset distribution.

Test Circuits

[查询"MIC861"供应商](#)

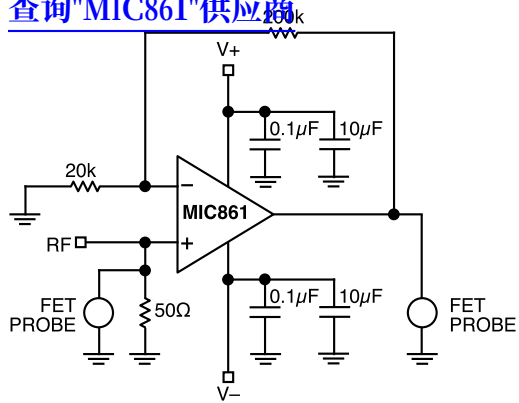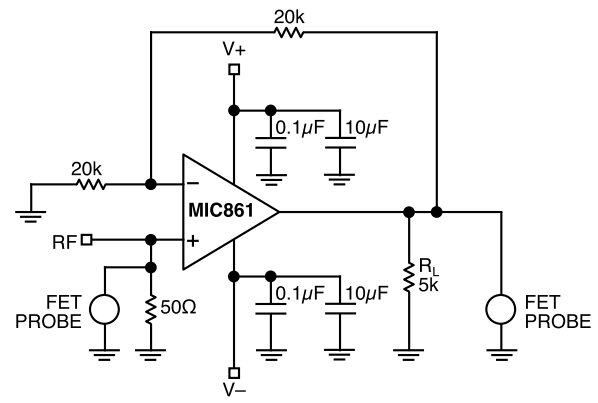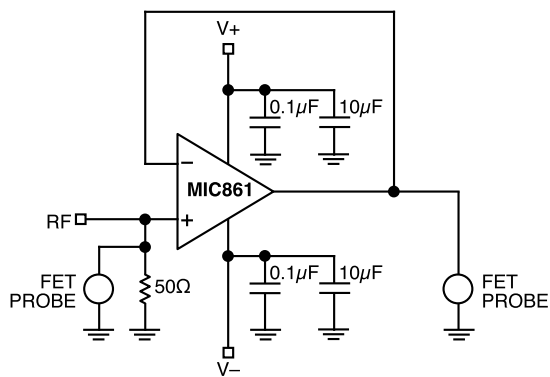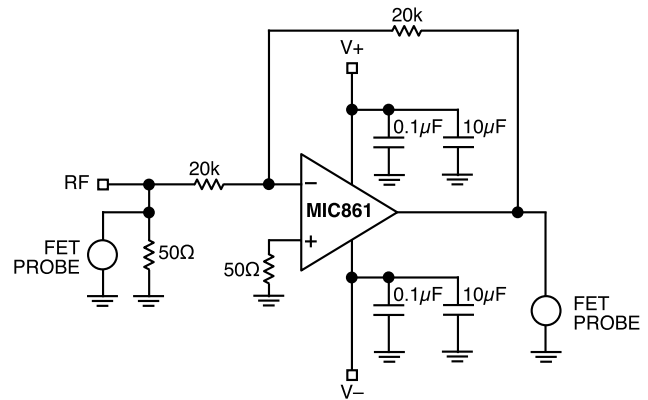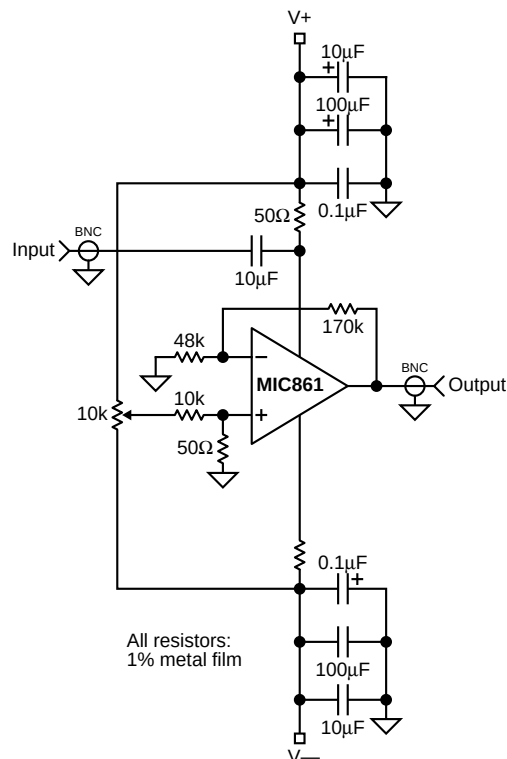
Test Circuit 1. $A_V = 11$ Test Circuit 2: $A_V = 2$ Test Circuit 3. $A_V = 1$ Test Circuit 4. $A_V = -1$ 

Test Circuit 5. Positive Power Supply Rejection Ratio Measurement


DC Performance Characteristics

[查询"MIC861"供应商](#)


Output Voltage vs.
Output Current




Output Voltage vs.
Output Current

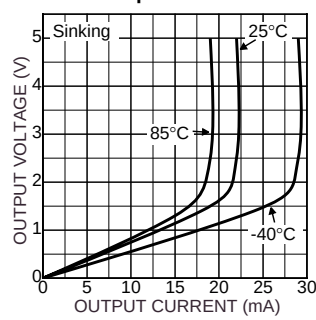


Short Circuit Current vs.
Supply Voltage

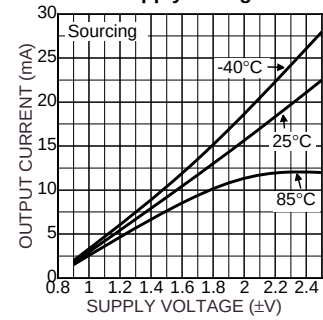


Short Circuit Current vs.
Supply Voltage

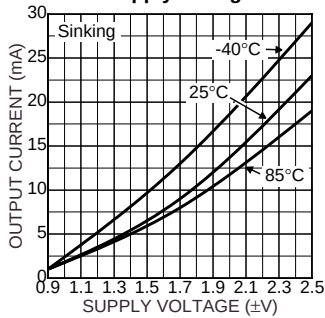


Offset Voltage vs.
Common-Mode Voltage




Offset Voltage vs.
Common-Mode Voltage

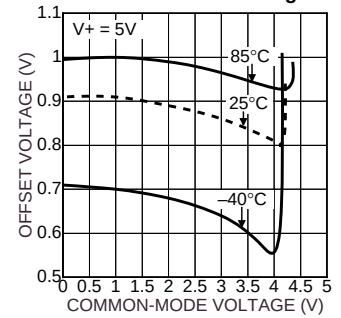


Offset Voltage vs.
Supply Voltage




Open Loop Gain vs.
Resistive Load

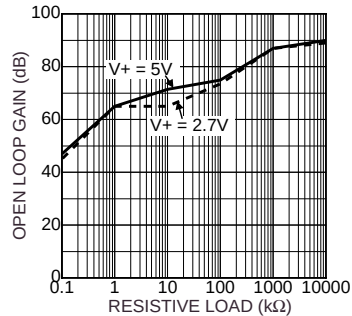


Supply Current vs.
Temperature




Offset Voltage vs.
Temperature














Short Circuit Current
vs. Temperature



Short Circuit Current
vs. Temperature


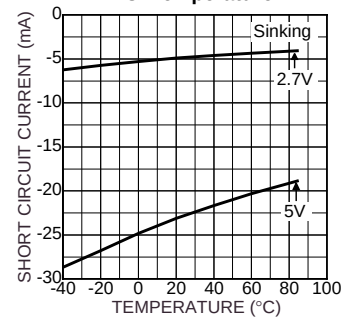


AC Performance Characteristics

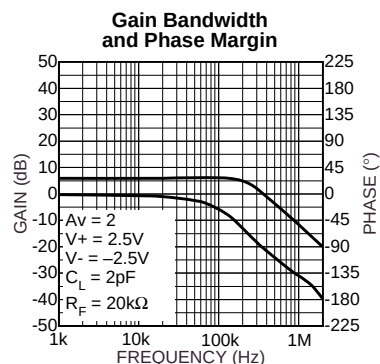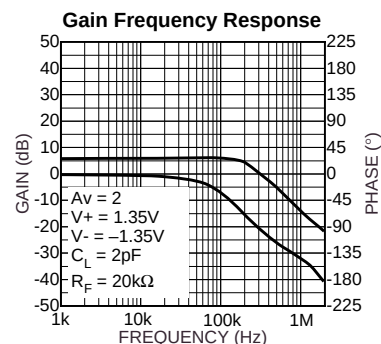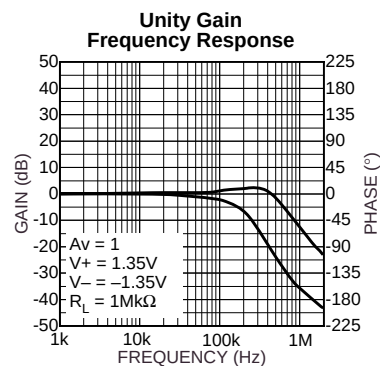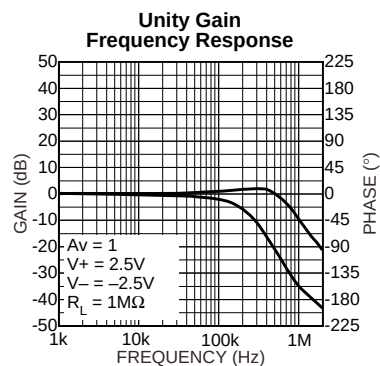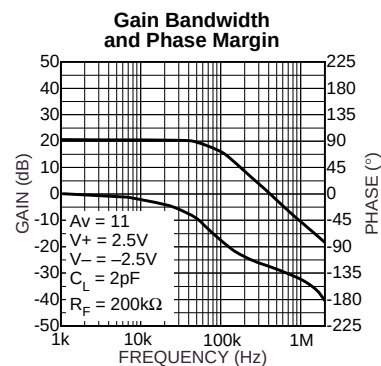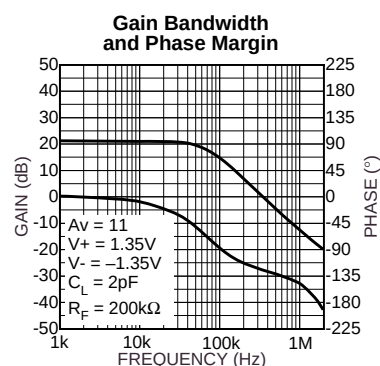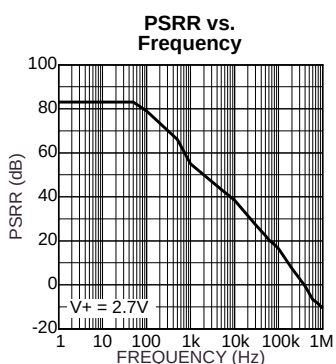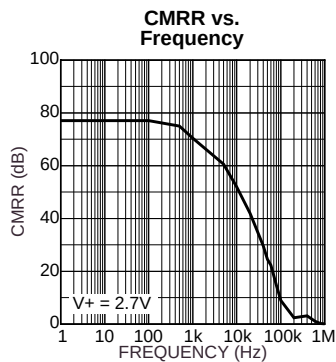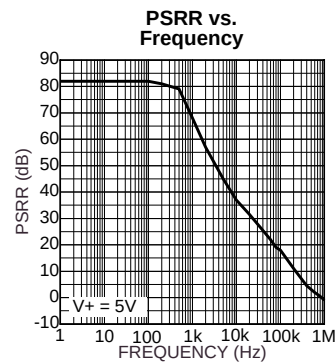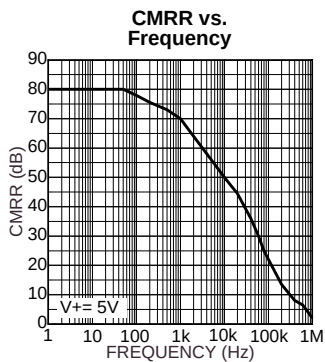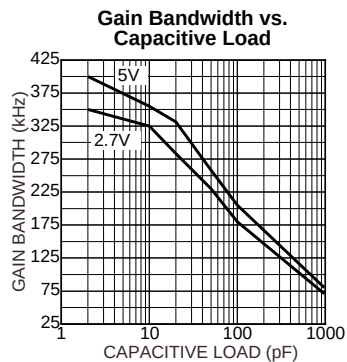[查询"MIC861"供应商](#)

[查询"MIC861"供应商](#)


Close-loop Unity Gain Frequency Response

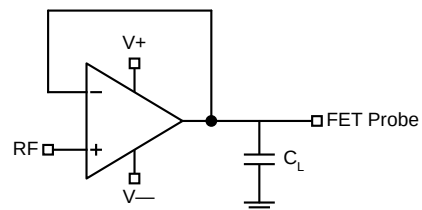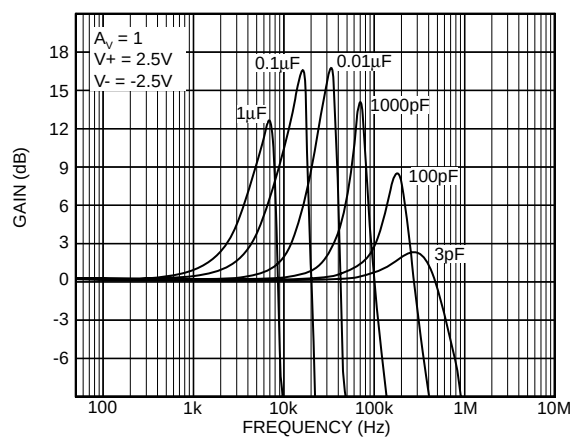


Functional Characteristics

[查询"MIC861"供应商](#)


Small Signal Pulse Response
Test Circuit 3: $A_V = 1$

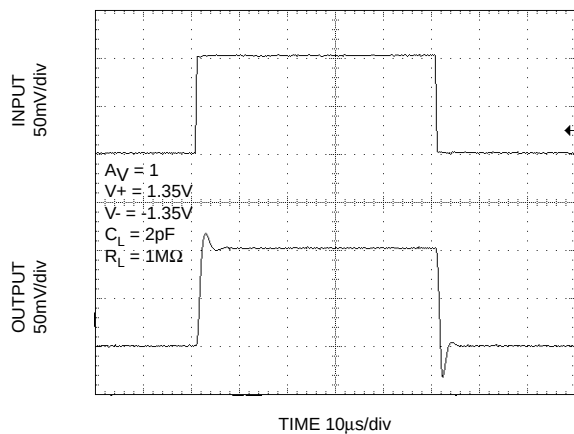


Small Signal Pulse Response
Test Circuit 3: $A_V = 1$

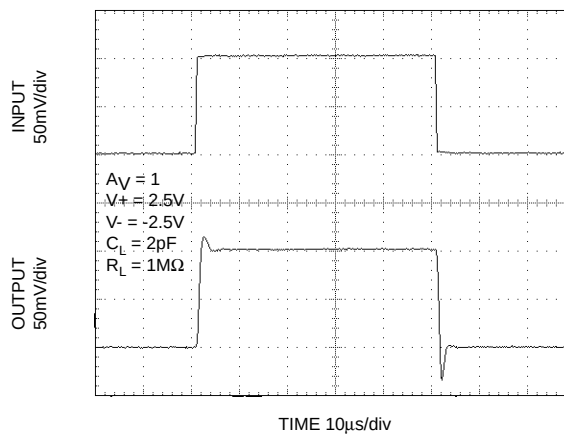


Small Signal Pulse Response
Test Circuit 3: $A_V = 1$

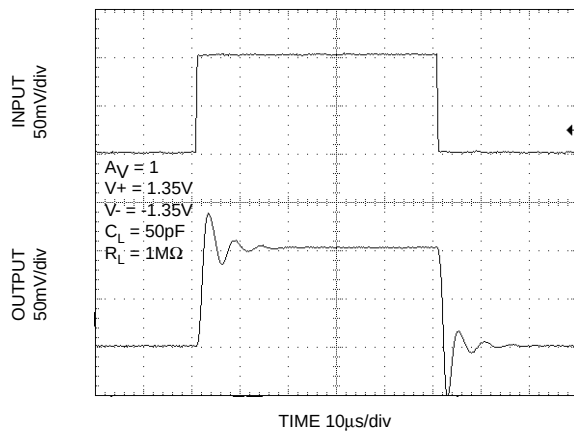


Small Signal Pulse Response
Test Circuit 3: $A_V = 1$

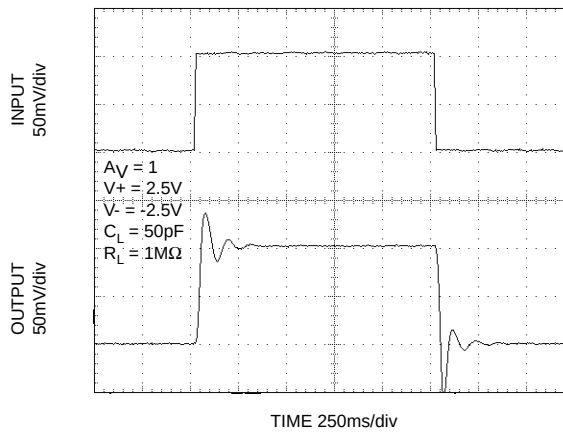

Small Signal Pulse Response
Test Circuit 4: $A_V = -1$

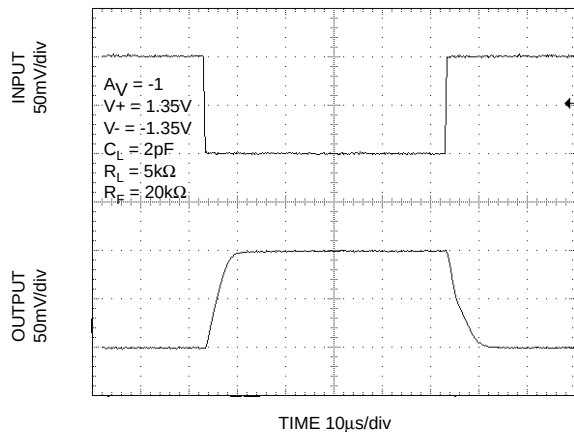


Small Signal Pulse Response
Test Circuit 4: $A_V = -1$

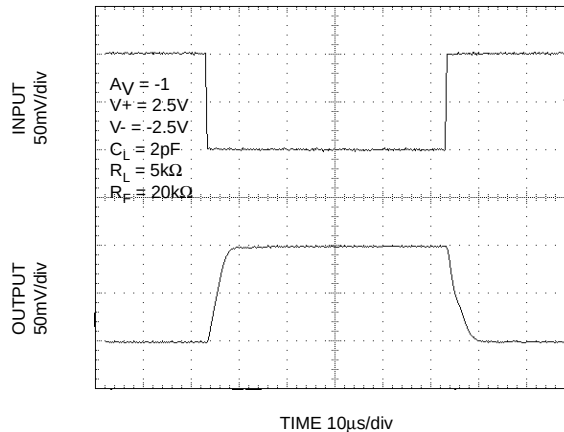


[查询"MIC861"供应商](#)


Small Signal Pulse Response
Test Circuit 4: $A_V = -1$

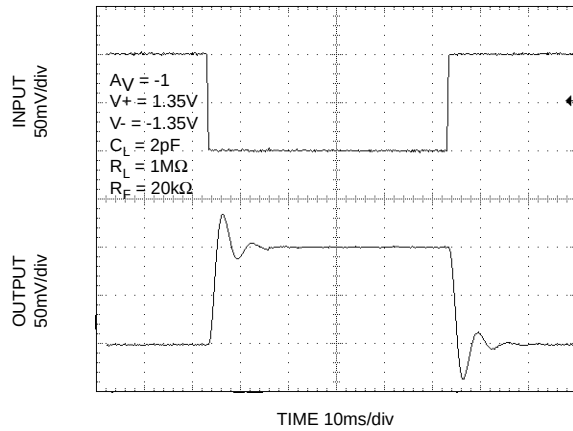


Small Signal Pulse Response
Test Circuit 4: $A_V = -1$

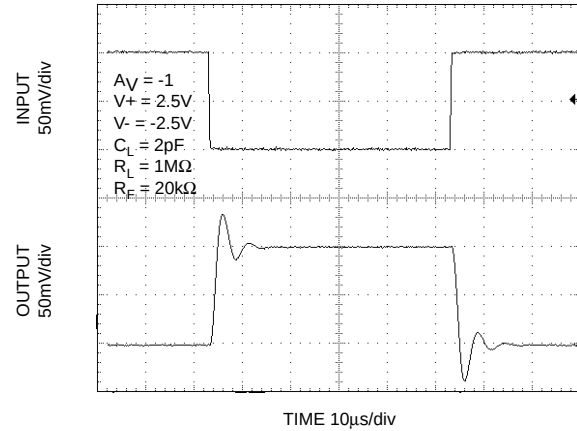


Rail to Rail Output Operation

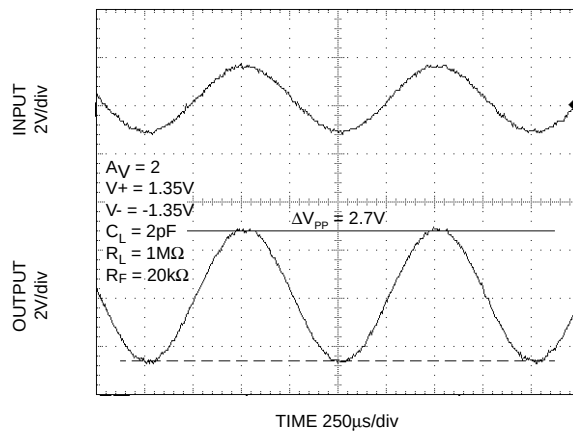


Rail to Rail Output Operation


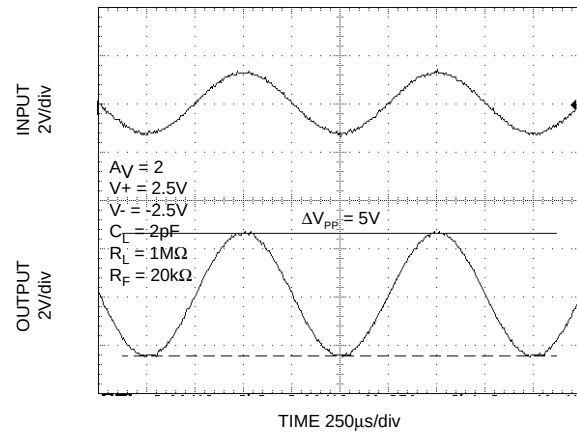


Rail to Rail Output Operation

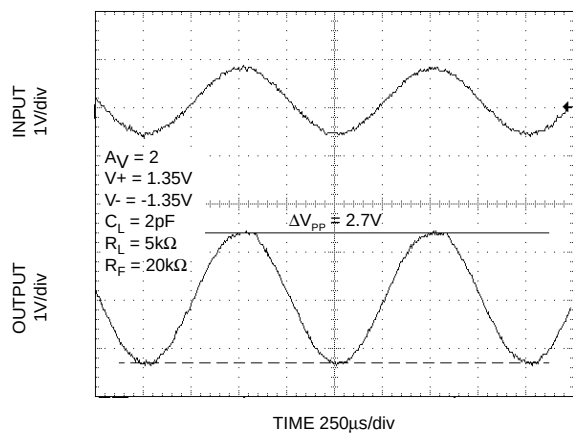

Rail to Rail Output Operation

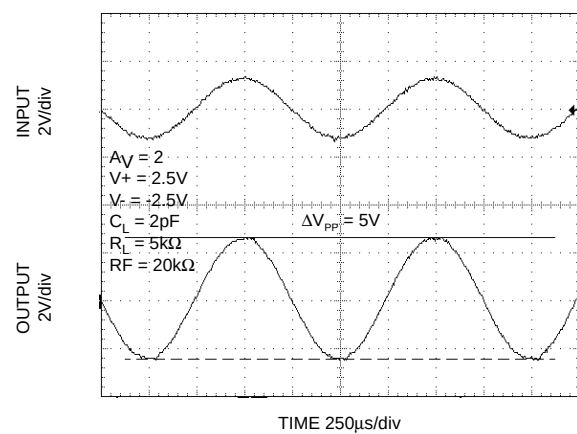

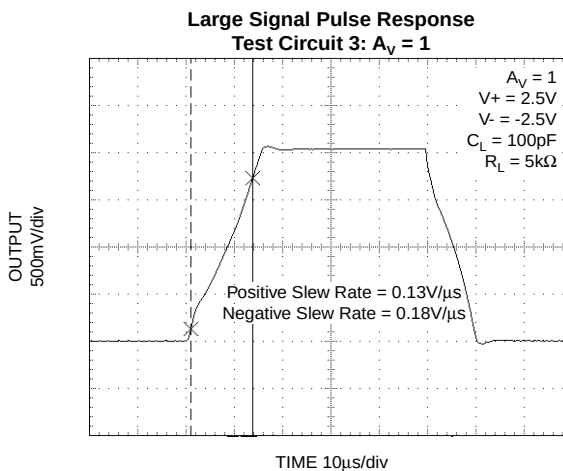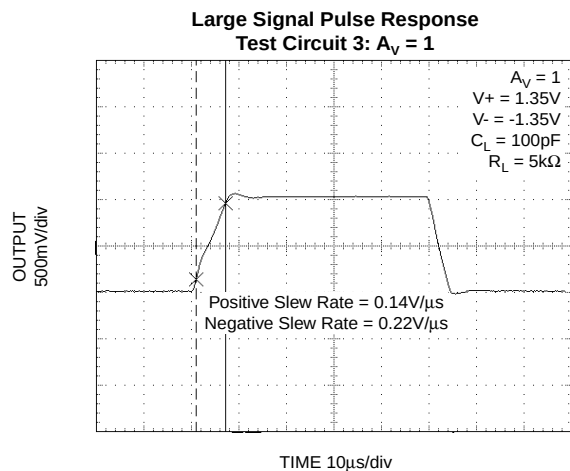[查询"MIC861"供应商](#)



Applications Information

Power Supply Bypassing


Regular supply bypassing techniques are recommended. A 10 μ F capacitor in parallel with a 0.1 μ F capacitor on both the positive and negative supplies are ideal. For best performance all bypassing capacitors should be located as close to the op amp as possible and all capacitors should be low ESL (equivalent series inductance), ESR (equivalent series resistance). Surface-mount ceramic capacitors are ideal.

Package Information

[查询"MIC861"供应商](#)

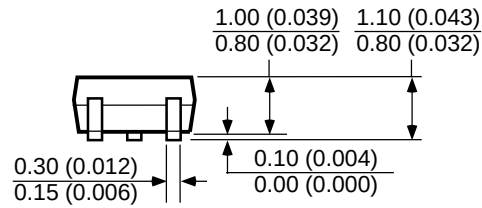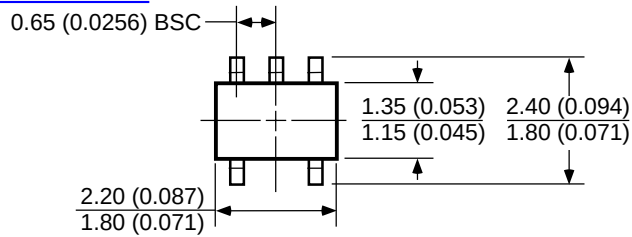

DIMENSIONS:
MM (INCH)



SC70-5

MICREL INC. 1849 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 944-0970 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2001 Micrel Incorporated