


2.0mm DUAL ROW SOCKET S.M.D.TYPE H: 4.5mm

[查询"200135FA"供应商](#)

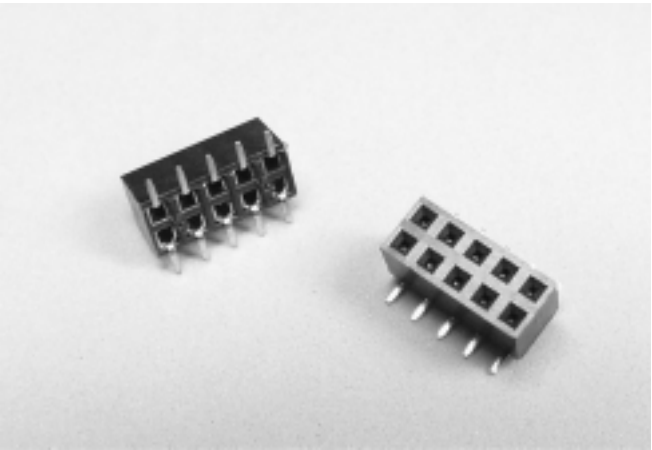


200135FA Series

Mates With SUYIN 200109,200112,200114,200115,200117,200121,200194 Series

Specifications:

- 4-50 Circuits
- Insulator Material : Black Hight Temp.Plastic
- Max Processing Temp.: -40°C to +105°C
- Terminal Material : Pho.bronze
- Plating : Contact-Selective Gold Plated or Full Gold Plated
- Max. Current Rating : 1.5A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 Seconds)

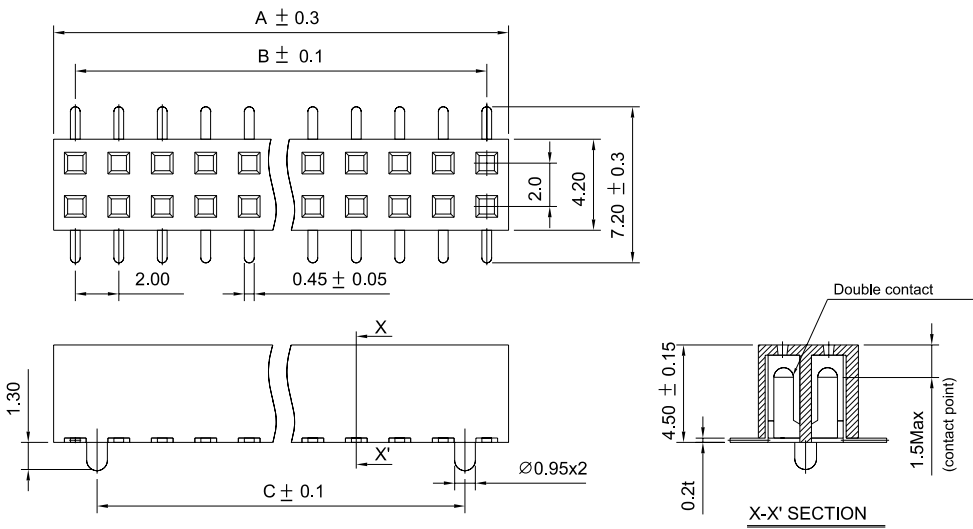


Order Information

200135FA□□□□00Z□
1 2 3 4 5

1. 'A' : Straight SMT Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package Option
 - 'U' : Tube Package Without CAP
 - 'R' : Reel Package With CAP
 - 'T' : Tube Package With CAP

Reference Page 11

Recommended P.C.B Layout

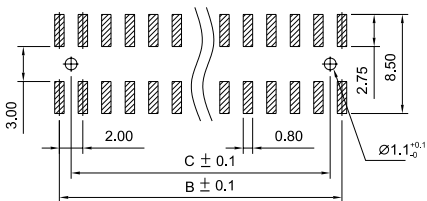

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	DIM.C	SUYIN P/NO.	DIM.A	DIM.B	DIM.C
200135FA004□□00Z□	4.0	2.0	-	200135FA030□□00Z□	30.0	28.0	26.0
200135FA008□□00Z□	8.0	6.0	4.0	200135FA032□□00Z□	32.0	30.0	28.0
200135FA010□□00Z□	10.0	8.0	6.0	200135FA034□□00Z□	34.0	32.0	30.0
200135FA012□□00Z□	12.0	10.0	8.0	200135FA036□□00Z□	36.0	34.0	32.0
200135FA014□□00Z□	14.0	12.0	10.0	200135FA038□□00Z□	38.0	36.0	34.0
200135FA016□□00Z□	16.0	14.0	12.0	200135FA040□□00Z□	40.0	38.0	36.0
200135FA018□□00Z□	18.0	16.0	14.0	200135FA042□□00Z□	42.0	40.0	38.0
200135FA020□□00Z□	20.0	18.0	16.0	200135FA044□□00Z□	44.0	42.0	40.0
200135FA022□□00Z□	22.0	20.0	18.0	200135FA046□□00Z□	46.0	44.0	42.0
200135FA024□□00Z□	24.0	22.0	20.0	200135FA048□□00Z□	48.0	46.0	44.0
200135FA026□□00Z□	26.0	24.0	22.0	200135FA050□□00Z□	50.0	48.0	46.0
200135FA028□□00Z□	28.0	26.0	24.0	200135FA052□□00Z□	52.0	50.0	48.0
				200135FA056□□00Z□	56.0	54.0	52.0
				200135FA060□□00Z□	60.0	58.0	56.0
				200135FA062□□00Z□	62.0	60.0	58.0
				200135FA064□□00Z□	64.0	62.0	60.0
				200135FA068□□00Z□	68.0	66.0	64.0
				200135FA070□□00Z□	70.0	68.0	66.0
				200135FA080□□00Z□	80.0	78.0	76.0