

**SPECIAL TYPES**

**For ATO® Fuses In-Line Type**

**SPECIFICATIONS:**

**Electrical:** Intended for use with 32 volts Autofuse® fuses rated to 20 or 30 amperes depending on wire size and terminal combinations.

**Mounting:** Capable of snap-mounting to panel from rear. Fuseholders interlock for multiple mounting.

**Molded Parts:** Black Thermoplastic (UL 94V2).

**Terminals:** Brass. Tin-plated. Snap-lock into body.



**Ambient Temperature:** -40°C to +85°C.

**Wire:** Stranded with PVC insulation, black #14 AWG for 155 300 Series and orange #10 AWG for 155 400 Series.

**PATENTED**

**ORDERING INFORMATION:**

| Unassembled   | Catalog Number                                 |   | Fuse Amperage Rating                 |
|---|--|---|--------------------------------------|
|   | Assembled with 8" Wire Loop, No Fuse           | Assembled with 8" Wire Loop and Fuse  |                                      |
| 155 320U<br>(Terminals designed for #14 AWG stranded wire and marked "14"). | 155 300<br>(#14 wire/ terminals rated to 20A). | 155 303A<br>155 304A<br>155 305A<br>155 37.5A<br>155 310A<br>155 315A<br>155 320A | 3<br>4<br>5<br>7.5<br>10<br>15<br>20 |
| 155 430U<br>(Terminals designed for #10 AWG stranded wire and marked "10"). | 155 400<br>(#10 wire/ terminals rated to 30A). | 155 425A<br>155 430A  | 25<br>30                             |

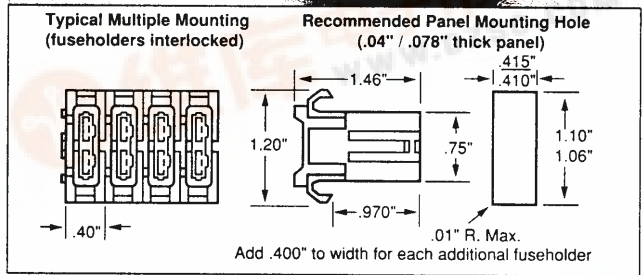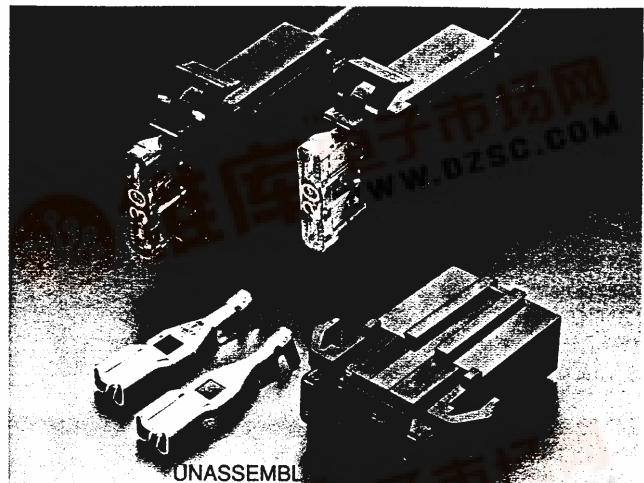

**For ATO® Fuses P.C. Board Mount Type**

**SPECIFICATIONS:**

**Electrical:** Intended for use with 32 volts ATO® fuses rated to 15 amperes.



**Molded Parts:** Black Thermoplastic

**Terminals:** Copper Alloy, Tin Plated

**Ambient Temperature:** -40°C to +85°C.

**ORDERING INFORMATION:**

Catalog Number: 04450715

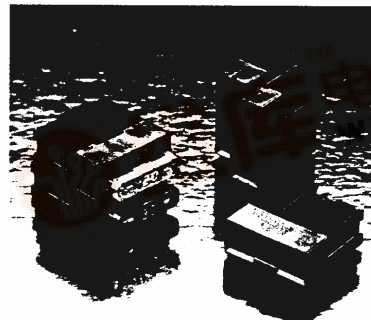

**For MINI® Fuses In-Line Type — Easy Crimp Fuseholder**

**SPECIFICATIONS:**

**Terminals:** Copper Alloy/Tin plated.

**Body:** Black Thermoplastic.

**Operating Temperature:** -40°C to +105°C.

Use standard crimping tool and crimp the matted area to secure wire. (Possible crimp tool - Ideal #30-428 [Toothed Die slot] or equivalent).

**ORDERING INFORMATION:**

| Catalog Number | Description   |
|----------------|---|
| 153 002        | 20A Max. Rating — Terminals will accept #16–22 AWG (1.0–3.3 mm <sup>2</sup> ) stranded wire (use appropriate wire size based on fuse usage). For example — Use #16 AWG wire for 20A fuse. |
| 153 003        | 30A Max. Rating — Terminals will accept #10–14 AWG (5.0–2.0 mm <sup>2</sup> ) stranded wire (use appropriate wire size based on fuse usage). For example — Use #10 AWG wire for 30A fuse. |

Tool For Fuse Removal or Replacement; Part No. 097024.

