


Power SMD LED PLCC-4



DESCRIPTION

The VLMY322..., VLMO322..., VLMK322..., and VLMS322.. series are an advanced development in terms of heat dissipation.

The leadframe profile of this PLCC-4 SMD package is optimized to reduce the thermal resistance.

This allows higher drive current and doubles the light output compared to Vishay's high intensity SMD LED in PLCC-2 package.

PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: SMD PLCC-4
- Product series: power
- Angle of half intensity: $\pm 60^\circ$

FEATURES

- Available in 8 mm tape
- High brightness SMD LED
- Luminous intensity and color categorized per packing unit
- Luminous intensity ratio per packing unit $I_{Vmax}/I_{Vmin.} \leq 1.6$
- ESD-withstand voltage: up to 2 kV according to JESD22-A114-B
- Suitable for all soldering methods according to CECC 00802 and J-STD-020
- Preconditioning: acc. to JEDEC level 2a
- Qualified according to JEDEC moisture sensitivity level 2a
- Compatible with IR reflow solder processes according to CECC 00802 and J-STD-020
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC



RoHS
COMPLIANT

APPLICATIONS

- Interior and exterior lighting
- Indicator and backlighting purposes for audio, video, LCDs, switches, symbols, illuminated advertising etc.
- Illumination purpose, alternative to incandescent lamps
- General use

PARTS TABLE

PART	COLOR, LUMINOUS INTENSITY	TECHNOLOGY
VLMY322U1V2-GS08	Yellow, $I_V = (450 \text{ to } 1125) \text{ mcd}$	AlInGaP on GaAs
VLMO322U1V2-GS08	Soft orange, $I_V = (450 \text{ to } 1125) \text{ mcd}$	AlInGaP on GaAs
VLMK322U1V2-GS08	Amber, $I_V = (450 \text{ to } 1125) \text{ mcd}$	AlInGaP on GaAs
VLMS322T2V1-GS08	Super red $I_V = (355 \text{ to } 900) \text{ mcd}$	AlInGaP on GaAs

ABSOLUTE MAXIMUM RATINGS ¹⁾ VLMY322..., VLMO322..., VLMK322..., VLMS322..

PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Reverse voltage ²⁾		V_R	5	V
Forward current		I_F	70	mA
Power dissipation	at RT	P_{tot}	225	mW
Junction temperature		T_j	125	°C
Operating temperature range		T_{amb}	- 40 to + 100	°C
Storage temperature range		T_{stg}	- 40 to + 100	°C
Thermal resistance junction/ambient	mounted on PC board FR4	R_{thJA}	290	K/W

Note:

¹⁾ $T_{amb} = 25^\circ\text{C}$, unless otherwise specified

²⁾ Driving the LED in reverse direction is suitable for short term application

OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾ VLMY322..., YELLOW							
PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$I_F = 50 \text{ mA}$	VLMY322U1V2	I_V	450	750	1125	mcd
Dominant wavelength	$I_F = 50 \text{ mA}$		λ_d	582	588	594	nm
Spectral bandwidth at 50 % $I_{rel \text{ max.}}$	$I_F = 50 \text{ mA}$		$\Delta\lambda$		18		nm
Angle of half intensity	$I_F = 50 \text{ mA}$		φ		± 60		deg
Forward voltage ³⁾	$I_F = 50 \text{ mA}$		V_F	1.7	2.1	2.6	V
Reverse current	$V_R = 5 \text{ V}$		I_R		0.01	10	μA

Note:

¹⁾ $T_{amb} = 25 \text{ }^\circ\text{C}$, unless otherwise specified

²⁾ In one packing unit $I_{Vmax.}/I_{Vmin.} \leq 1.6$

³⁾ Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of $\pm 0.1 \text{ V}$

OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾ VLMO322..., SOFT ORANGE							
PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$I_F = 50 \text{ mA}$	VLMO322U1V2	I_V	450	750	1125	mcd
Dominant wavelength	$I_F = 50 \text{ mA}$		λ_d	600	605	612	nm
Spectral bandwidth at 50 % $I_{rel \text{ max.}}$	$I_F = 50 \text{ mA}$		$\Delta\lambda$		18		nm
Angle of half intensity	$I_F = 50 \text{ mA}$		φ		± 60		deg
Forward voltage ³⁾	$I_F = 50 \text{ mA}$		V_F	1.7	2.1	2.6	V
Reverse current	$V_R = 5 \text{ V}$		I_R		0.01	10	μA

Note:

¹⁾ $T_{amb} = 25 \text{ }^\circ\text{C}$, unless otherwise specified

²⁾ In one packing unit $I_{Vmax.}/I_{Vmin.} \leq 1.6$

³⁾ Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of $\pm 0.1 \text{ V}$

OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾ VLMK322..., AMBER							
PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$I_F = 50 \text{ mA}$	VLMK322U1V2	I_V	450	750	1125	mcd
Dominant wavelength	$I_F = 50 \text{ mA}$		λ_d	610		621	nm
Spectral bandwidth at 50 % $I_{rel \text{ max.}}$	$I_F = 50 \text{ mA}$		$\Delta\lambda$		18		nm
Angle of half intensity	$I_F = 50 \text{ mA}$		φ		± 60		deg
Forward voltage ³⁾	$I_F = 50 \text{ mA}$		V_F	1.7	2.1	2.6	V
Reverse current	$V_R = 5 \text{ V}$		I_R		0.01	10	μA

Note:

¹⁾ $T_{amb} = 25 \text{ }^\circ\text{C}$, unless otherwise specified

²⁾ In one packing unit $I_{Vmax.}/I_{Vmin.} \leq 1.6$

³⁾ Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of $\pm 0.1 \text{ V}$

OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾ VLMS322..., SUPER RED							
PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$I_F = 50 \text{ mA}$	VLMS322T2V1	I_V	355	450	900	mcd
Dominant wavelength	$I_F = 50 \text{ mA}$		λ_d	625	630	640	nm
Spectral bandwidth at 50 % $I_{rel \text{ max.}}$	$I_F = 50 \text{ mA}$		$\Delta\lambda$		18		nm
Angle of half intensity	$I_F = 50 \text{ mA}$		φ		± 60		deg
Forward voltage ³⁾	$I_F = 50 \text{ mA}$		V_F	1.7	2.1	2.6	V
Reverse current	$V_R = 5 \text{ V}$		I_R		0.01	10	μA

Note:

¹⁾ $T_{amb} = 25 \text{ }^\circ\text{C}$, unless otherwise specified

²⁾ In one packing unit $I_{Vmax.}/I_{Vmin.} \leq 1.6$

³⁾ Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of $\pm 0.1 \text{ V}$

LUMINOUS INTENSITY CLASSIFICATION		
GROUP	LIGHT INTENSITY (mcd)	
STANDARD	MIN.	MAX.
T2	355	450
U1	450	560
U2	560	715
V1	715	900
V2	900	1125

Note:

Luminous intensity is tested at a current pulse duration of 25 ms and an accuracy of $\pm 11\%$.

The above type numbers represent the order groups which include only a few brightness groups. Only one group will be shipped on each reel (there will be no mixing of two groups on each reel). In order to ensure availability, single brightness groups will not be orderable.

In a similar manner for colors where wavelength groups are measured and binned, single wavelength groups will be shipped on any one reel. In order to ensure availability, single wavelength groups will not be orderable.

COLOR CLASSIFICATION						
GROUP	YELLOW		SOFT ORANGE		AMBER	
	DOM. WAVELENGTH (nm)					
	MIN.	MAX.	MIN.	MIN.	MAX.	MAX.
W	582	585	600	603	610	615
X	585	588	603	606	615	621
Y	588	591	606	609		
Z	591	594	609	612		

Note:

Wavelengths are tested at a current pulse duration of 25 ms and an accuracy of ± 1 nm.

TYPICAL CHARACTERISTICS

$T_{amb} = 25^\circ\text{C}$, unless otherwise specified

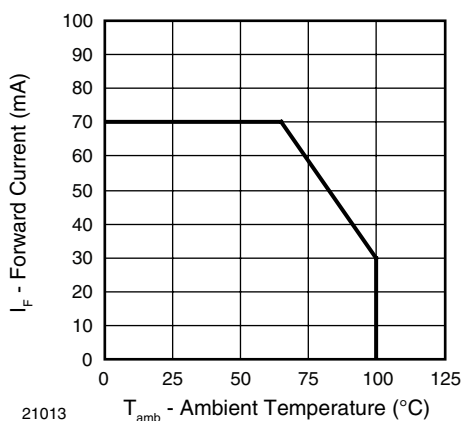


Figure 1. Forward Current vs. Ambient Temperature

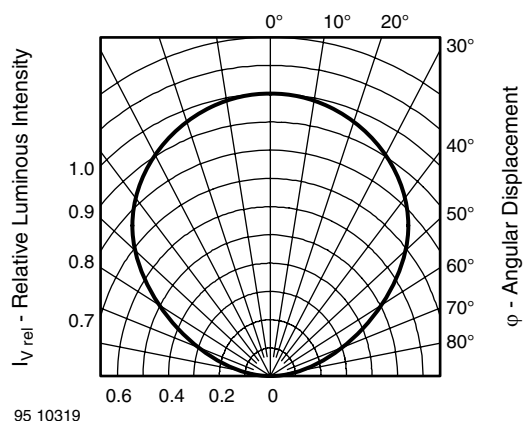


Figure 2. Rel. Luminous Intensity vs. Angular Displacement

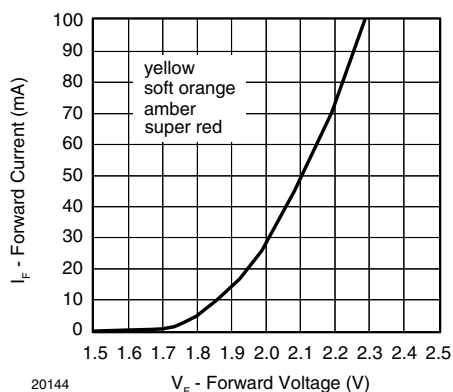


Figure 3. Relative Luminous Intensity vs. Forward Current

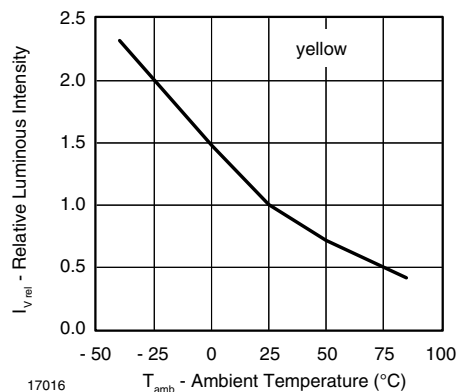


Figure 6. Relative Luminous Intensity vs. Amb. Temperature

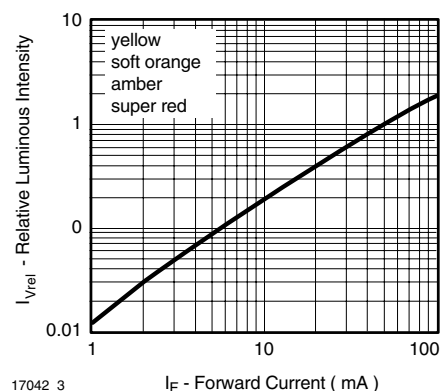


Figure 4. Relative Luminous Intensity vs. Forward Current

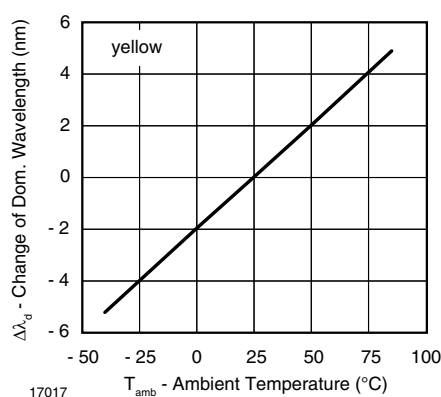


Figure 7. Relative Luminous Intensity vs. Amb. Temperature

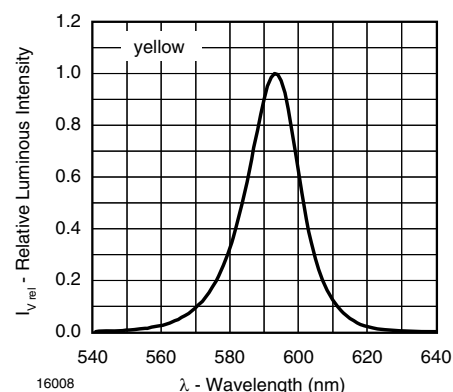


Figure 5. Relative Intensity vs. Wavelength

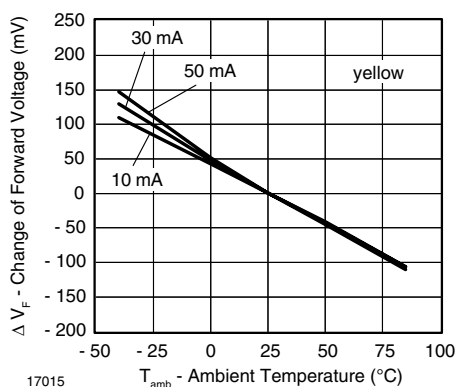


Figure 8. Change of Forward Voltage vs. Ambient Temperature

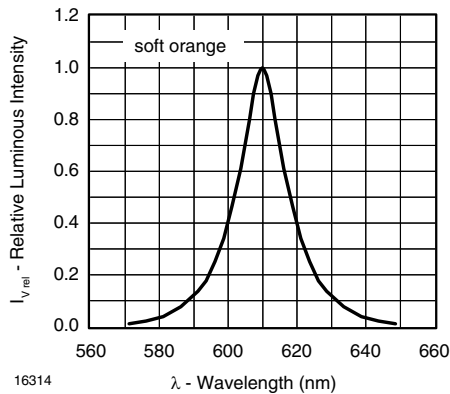


Figure 9. Relative Intensity vs. Wavelength

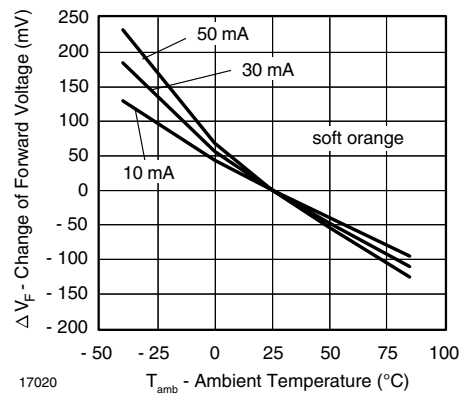


Figure 12. Change of Forward Voltage vs. Ambient Temperature

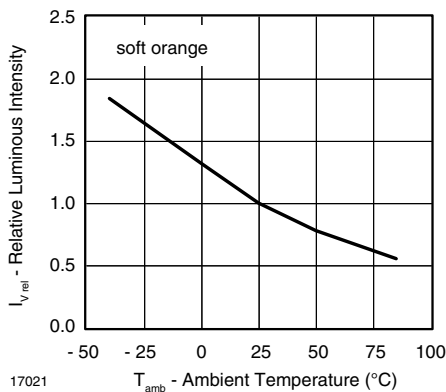


Figure 10. Relative Luminous Intensity vs. Amb. Temperature

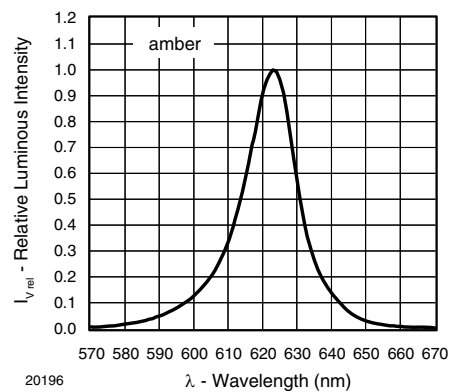


Figure 13. Relative Intensity vs. Wavelength

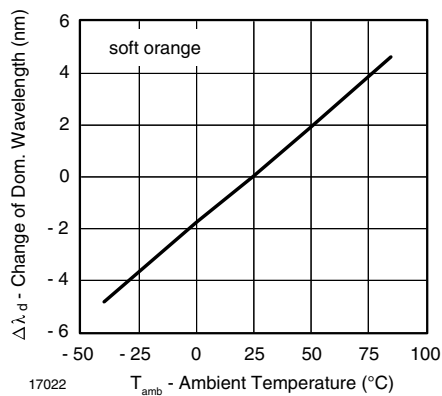


Figure 11. Change of Dominant Wavelength vs. Ambient Temperature

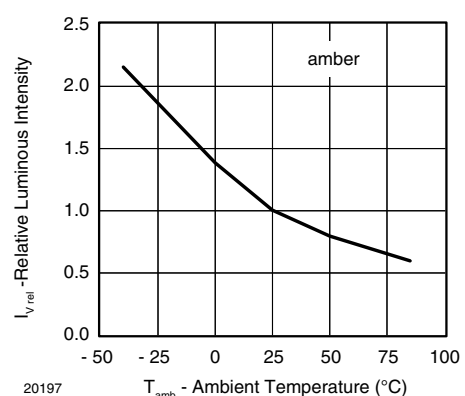


Figure 14. Relative Luminous Intensity vs. Amb. Temperature

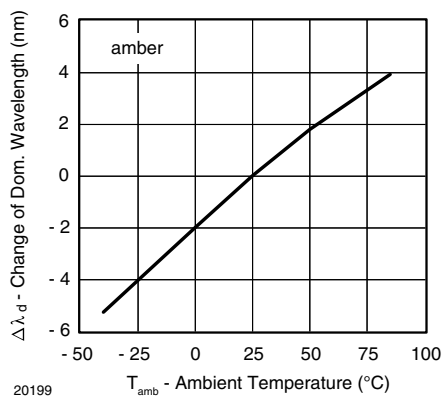


Figure 15. Change of Dominant Wavelength vs. Ambient Temperature

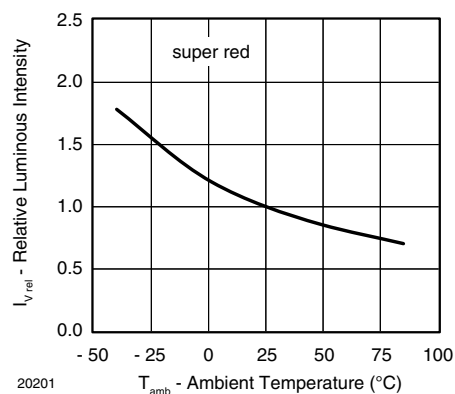


Figure 18. Relative Luminous Intensity vs. Amb. Temperature

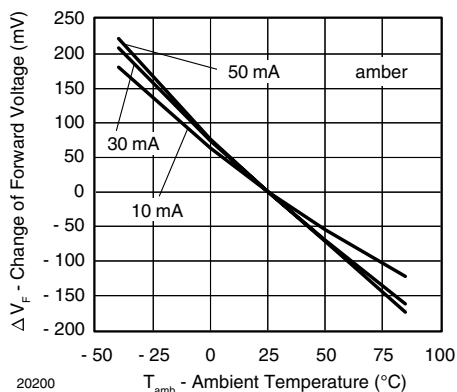


Figure 16. Change of Forward Voltage vs. Ambient Temperature

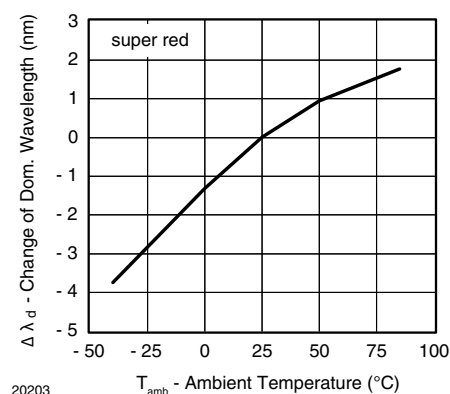


Figure 19. Change of Dominant Wavelength vs. Ambient Temperature

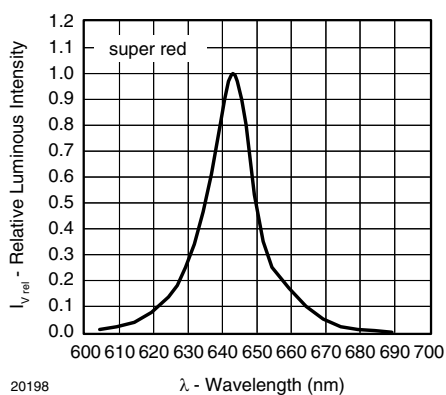


Figure 17. Relative Intensity vs. Wavelength


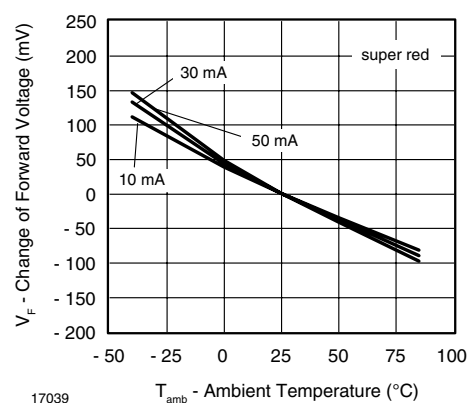


Figure 20. Change of Forward Voltage vs. Ambient Temperature

REEL DIMENSIONS in millimeters

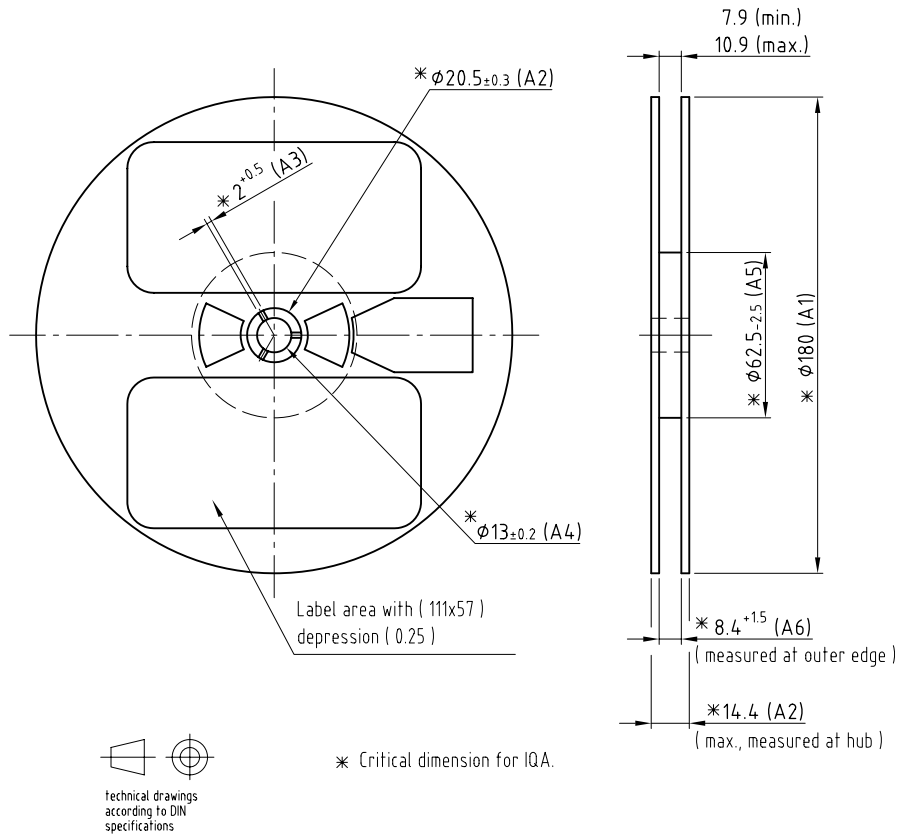

GS08 = 2000 pcs


Not indicated tolerances ± 0.05
 Material: black static dissipative

Drawing refers to following types: $\varnothing 180$ mm Plastic reel
 Drawing-No.: 9.800-5086.01-4
 Issue: 2; 05.05.08
 20983

TAPING DIMENSIONS in millimeters


Taping and orientation

Reels come in quantity of 2000 units.

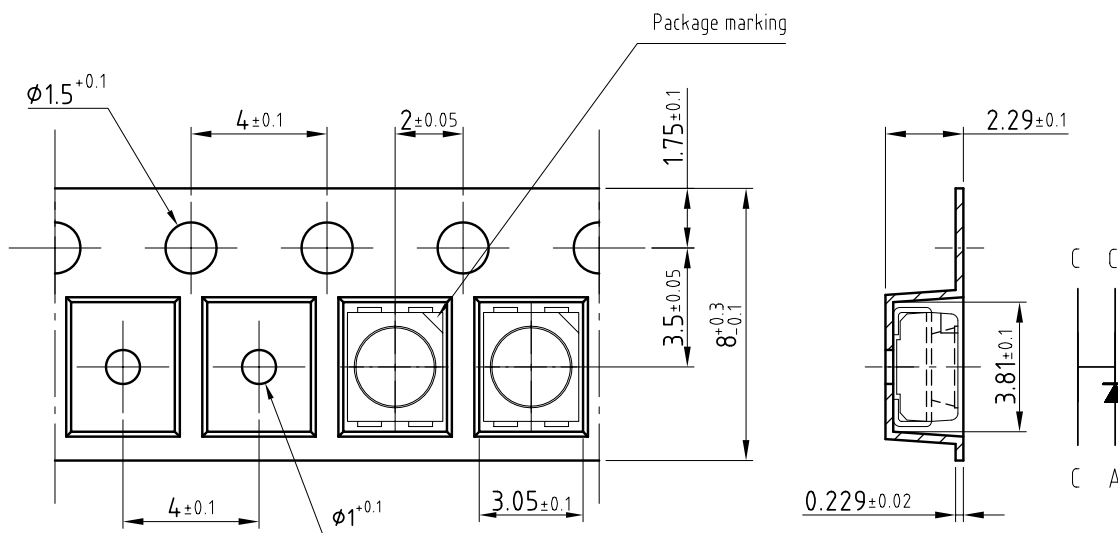

200mm min. for $\phi 180$ reel

480mm min. for $\phi 180$ reel

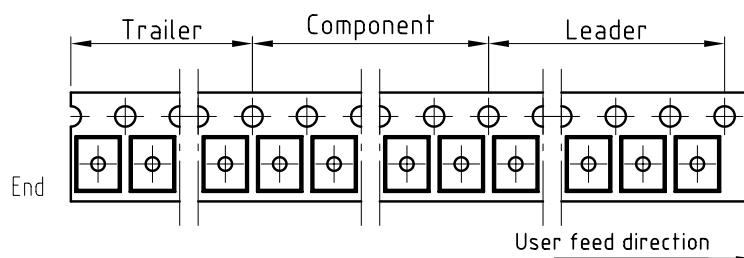


technical drawings
according to DIN
specifications

Drawing-No.: 9.700-5334.02-4

Issue: 2; 07.04.08

21241

PACKAGE/SOLDERING PADS DIMENSIONS in millimeters

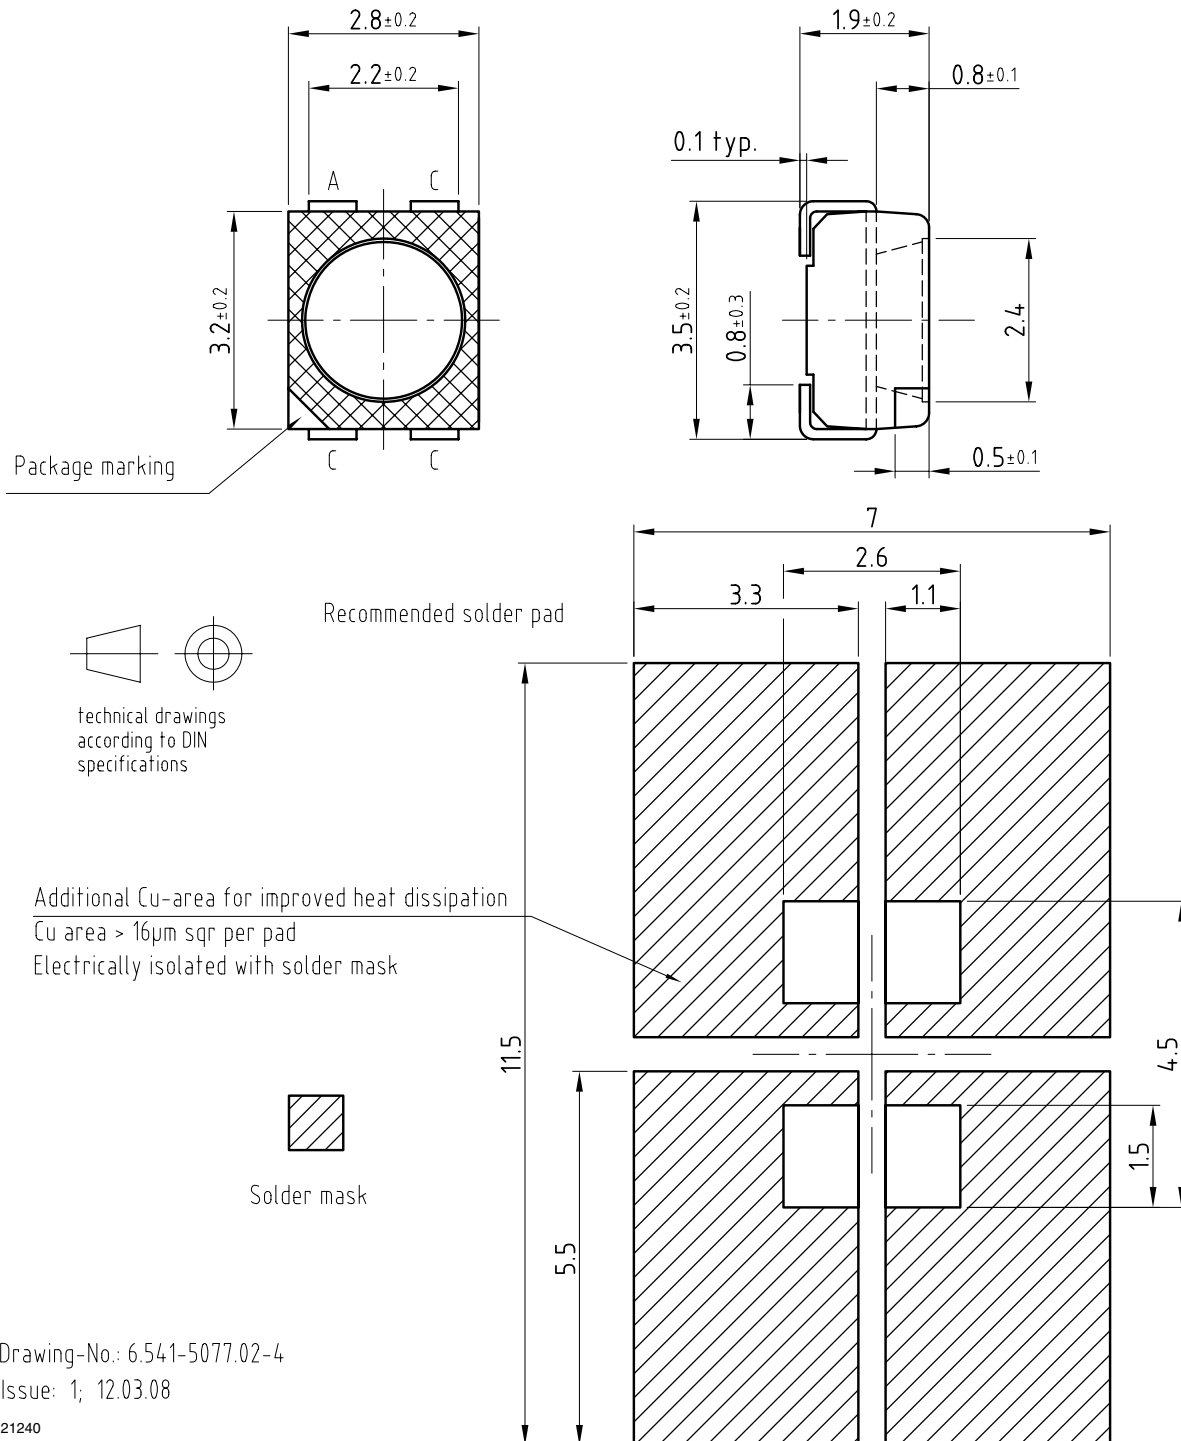

SOLDERING PROFILE

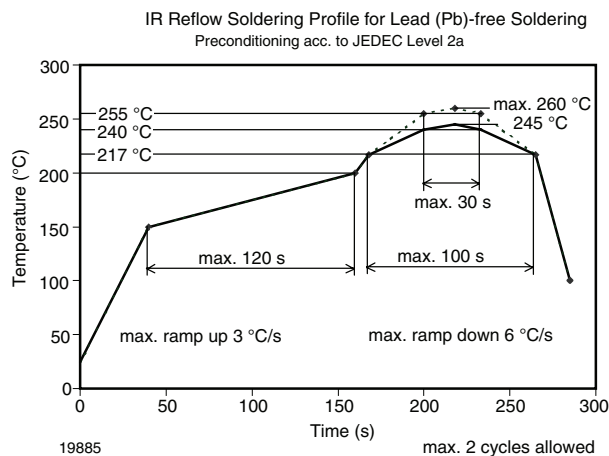


Figure 21. Vishay Lead (Pb)-free Reflow Soldering Profile (acc. to J-STD-020)


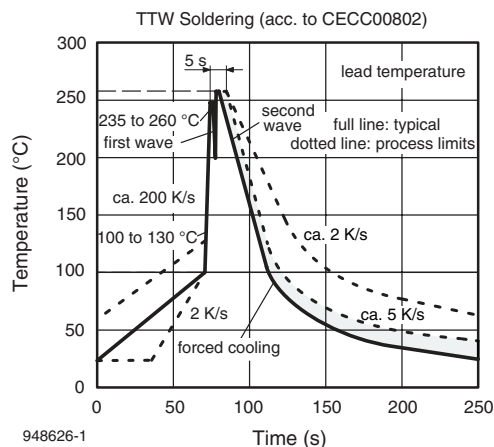


Figure 22. Double Wave Soldering of Opto Devices (all Packages)


BAR CODE PRODUCT LABEL EXAMPLE:

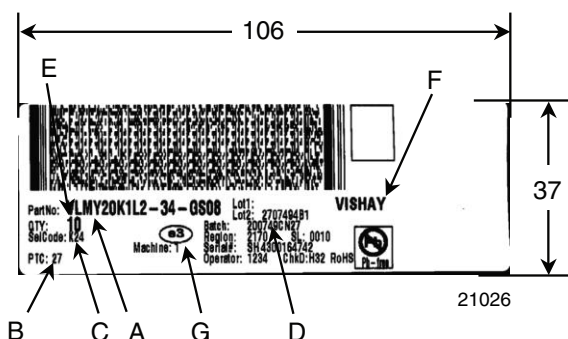

- A) Type of component
- B) PTC = manufacturing plant
- C) SEL - selection code (bin):
e.g.: K2 = code for luminous intensity group
4 = code for color group
- D) Batch/date code
- E) Total quantity
- F) Company code
- G) Code for lead (Pb)-free classification (e3)

DRY PACKING

The reel is packed in an anti-humidity bag to protect the devices from absorbing moisture during transportation and storage.

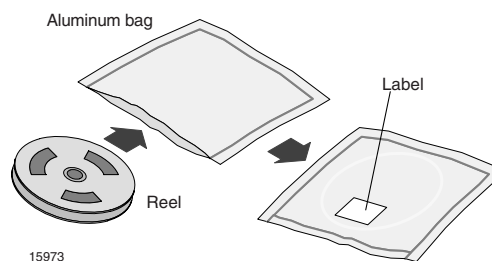

FINAL PACKING

The sealed reel is packed into a cardboard box. A secondary cardboard box is used for shipping purposes.

RECOMMENDED METHOD OF STORAGE

Dry box storage is recommended as soon as the aluminum bag has been opened to prevent moisture absorption. The following conditions should be observed, if dry boxes are not available:

- Storage temperature 10 °C to 30 °C
- Storage humidity $\leq 60\%$ RH max.

After more than 672 h under these conditions moisture content will be too high for reflow soldering.

In case of moisture absorption, the devices will recover to the former condition by drying under the following condition:

192 h at 40 °C + 5 °C/- 0 °C and < 5 % RH (dry air/nitrogen) or

96 h at 60 °C + 5 °C and < 5 % RH for all device containers or

24 h at 100 °C + 5 °C not suitable for reel or tubes.

An EIA JEDEC standard JESD22-A112 level 2a label is included on all dry bags.

ESD PRECAUTION

Proper storage and handling procedures should be followed to prevent ESD damage to the devices especially when they are removed from the antistatic shielding bag. Electro-static sensitive devices warning labels are on the packaging.

VISHAY SEMICONDUCTORS STANDARD BAR CODE LABELS

The Vishay Semiconductors standard bar code labels are printed at final packing areas. The labels are on each packing unit and contain Vishay Semiconductors specific data.

	CAUTION This bag contains MOISTURE - SENSITIVE DEVICES	LEVEL 2a						
1. Shelf life in sealed bag 12 months at <40°C and < 90% relative humidity (RH)								
2. After this bag is opened devices that will be subjected to infrared reflow, vapor-phase reflow, or equivalent processing (peak package body temp. 260°C) must be: a) Mounted within 672 hours at factory condition of $\leq 30^\circ\text{C}/60\%\text{RH}$ or b) Stored at $\leq 10\%$ RH.								
3. Devices require baking before mounting if: a) Humidity Indicator Card is $> 10\%$ when read at $23^\circ\text{C} \pm 5^\circ\text{C}$ or b) 2a or 2b is not met.								
4. If baking is required, devices may be baked for: <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">192 hours at $40^\circ\text{C} + 5^\circ\text{C}/-0^\circ\text{C}$ and $< 5\%\text{RH}$ (dry air/nitrogen)</td> <td style="width: 50%; text-align: right;">or</td> </tr> <tr> <td>96 hours at $60 \pm 5^\circ\text{C}$ and $< 5\%\text{RH}$</td> <td style="text-align: right;">For all device containers or</td> </tr> <tr> <td>24 hours at $100 \pm 5^\circ\text{C}$</td> <td style="text-align: right;">Not suitable for reels or tubes</td> </tr> </table>			192 hours at $40^\circ\text{C} + 5^\circ\text{C}/-0^\circ\text{C}$ and $< 5\%\text{RH}$ (dry air/nitrogen)	or	96 hours at $60 \pm 5^\circ\text{C}$ and $< 5\%\text{RH}$	For all device containers or	24 hours at $100 \pm 5^\circ\text{C}$	Not suitable for reels or tubes
192 hours at $40^\circ\text{C} + 5^\circ\text{C}/-0^\circ\text{C}$ and $< 5\%\text{RH}$ (dry air/nitrogen)	or							
96 hours at $60 \pm 5^\circ\text{C}$ and $< 5\%\text{RH}$	For all device containers or							
24 hours at $100 \pm 5^\circ\text{C}$	Not suitable for reels or tubes							
Bag Seal Date: _____ (If blank, see bar code label)								
Note: LEVEL defined by EIA JEDEC Standard JESD22-A113								

19786

Example of JESD22-A112 level 2a label

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.