

# DIN Style Type D and Neozed

## Low Voltage Industrial Fuses

D, NZ

### TYPE 'D' Fuse

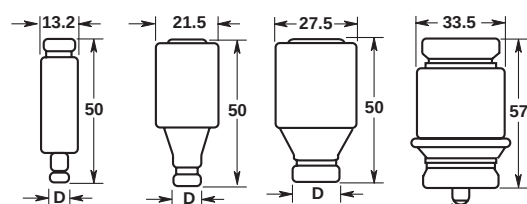


Figure 1

Figure 2

Figure 3

Figure 4

500 Volts a.c. 2 to 100 Amps, 100k AIC

'D' type fuses complying with DIN 49360 Part 2 and DIN 49515, operating class gL.

| Figure Number | Catalog Number | Dimensional Data (mm) |   |    | Ampere Rating | Color Code | Carton Quantity |
|---------------|----------------|-----------------------|---|----|---------------|------------|-----------------|
|               |                | A                     | B | D  |               |            |                 |
| 1             | 2D16           | —                     | — | 6  | 2             | Pink       | 5               |
|               | 4D16           | —                     | — | 6  | 4             | Brown      |                 |
|               | 6D16           | —                     | — | 6  | 6             | Green      |                 |
|               | 10D16          | —                     | — | 8  | 10            | Red        |                 |
|               | 16D16          | —                     | — | 10 | 16            | Grey       |                 |
|               | 20D16          | —                     | — | 12 | 20            | Blue       |                 |
|               | 25D16          | —                     | — | 14 | 25            | Yellow     |                 |
| 2             | 2D27           | —                     | — | 6  | 2             | Pink       | 5               |
|               | 4D27           | —                     | — | 6  | 4             | Brown      |                 |
|               | 6D27           | —                     | — | 6  | 6             | Green      |                 |
|               | 10D27          | —                     | — | 8  | 10            | Red        |                 |
|               | 16D27          | —                     | — | 10 | 16            | Grey       |                 |
|               | 20D27          | —                     | — | 12 | 20            | Blue       |                 |
|               | 25D27          | —                     | — | 14 | 25            | Yellow     |                 |
| 3             | 35D33          | —                     | — | 16 | 35            | Black      | 5               |
|               | 50D33          | —                     | — | 18 | 50            | White      |                 |
|               | 63D33          | —                     | — | 20 | 63            | Copper     |                 |
| 4             | 80D125         | —                     | — | 5  | 80            | Silver     | 10              |
|               | 100D125        | —                     | — | 7  | 100           | Red        |                 |

**Additional Fuselinks:** Quick acting fuselinks in body sizes D16, D27, D33 and D125 rated 2-100 Amps.

Reference number suffixed Q, i.e. 10D27Q. Voltage rating 500 Volts. *Notes:* (a) Gauge rings and keys can also be supplied.

### NEOZED FUSE




Figure 5

440 Volts a.c. 2 to 63 Amps, 100kAIC

(Also suitable for use on 250 Volt d.c. systems.)

| Figure Number | Catalog Number | Dimensional Data (mm) |    |   | Ampere Rating | Color Code | Carton Quantity |
|---------------|----------------|-----------------------|----|---|---------------|------------|-----------------|
|               |                | A                     | B  | D |               |            |                 |
| 5             | 2NZ01          | —                     | 11 | — | 2             | Pink       | 10              |
|               | 4NZ01          | —                     | 11 | — | 4             | Brown      |                 |
|               | 6NZ01          | —                     | 11 | — | 6             | Green      |                 |
|               | 10NZ01         | —                     | 11 | — | 10            | Red        |                 |
|               | 16NZ01         | —                     | 11 | — | 16            | Grey       |                 |
|               | 20NZ02         | —                     | 15 | — | 20            | Blue       |                 |
|               | 25NZ02         | —                     | 15 | — | 25            | Yellow     |                 |
|               | 35NZ02         | —                     | 15 | — | 35            | Black      |                 |
|               | 50NZ02         | —                     | 15 | — | 50            | White      |                 |
|               | 63NZ02         | —                     | 15 | — | 63            | Copper     |                 |

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.