

90° HYBRID SURFACE MOUNT MODEL: SLQ-310

3:1 BANDWIDTH

115 - 345 MHz

FEATURES:

- ▶ Excellent Performance
- ▶ Small Size, Surface Mount
- ▶ Building Block For:
 - Power Amplifiers
 - Image Rejection Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...



SPECIFICATIONS (Rev. B 02/11/08)

Frequency	115 - 345 MHz	
Insertion Loss (dB) *	Typ.	Max.
	0.4	0.8
Amplitude Unbalance	Typ.	Max.
	0.8	1.4
Phase Unbalance (Deg.)	Typ.	Max.
	2	4
Isolation (dB)	Typ.	Min.
	20	15
Power Rating	1 Watt (Max.)	
Impedance	50 Ohms (Nom.)	
VSWR	1.3:1 (Typ.)	
Operating Temperature Range	-40 to +85 °C	
Storage Temperature Range	-55 to +100 °C	

* Insertion loss in excess of the theoretical 3 dB coupling.

Package #	159			
Mechanical drawing of the SLQ-310 package showing dimensions: 0.310, 0.400, 0.310, 0.200, 0.050, 0.010, 0.270, 0.100, 0.150, 0.035, 0.050, 0.060, 0.140, 0.4400, 6 PLS, 0.100.				
LAYOUT FOR PRINTED CIRCUIT DESIGN.				
Port Configuration				
Input	Isolated*	+90° Output	0° Output	GND.**
6	5	1	2	3,4

* Terminate ISOLATED port in 50 Ohms EXTERNALLY.
** Ground Externally



[查询"SLQ-310"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SLQ-310

3:1 BANDWIDTH

115 - 345 MHz

Data @ 25°C

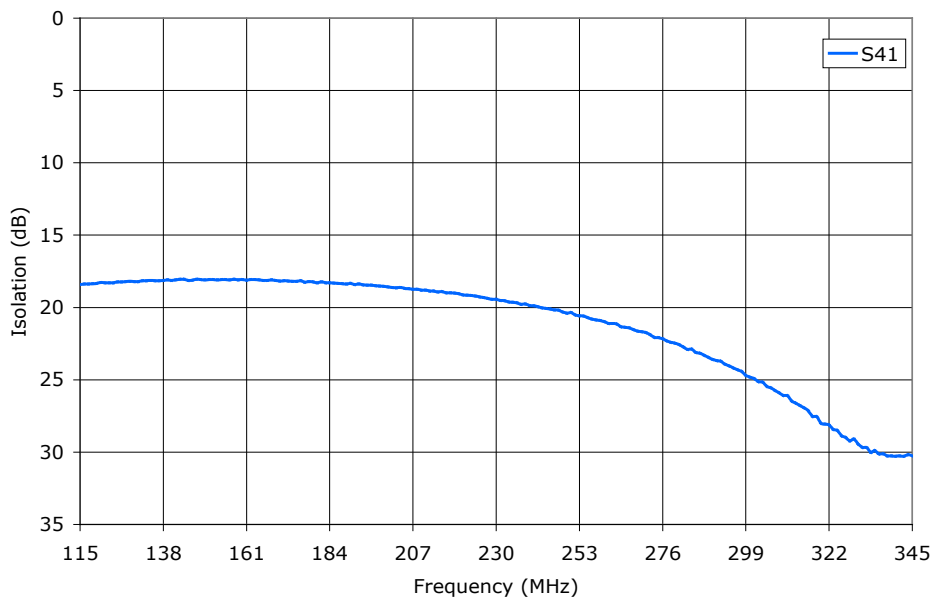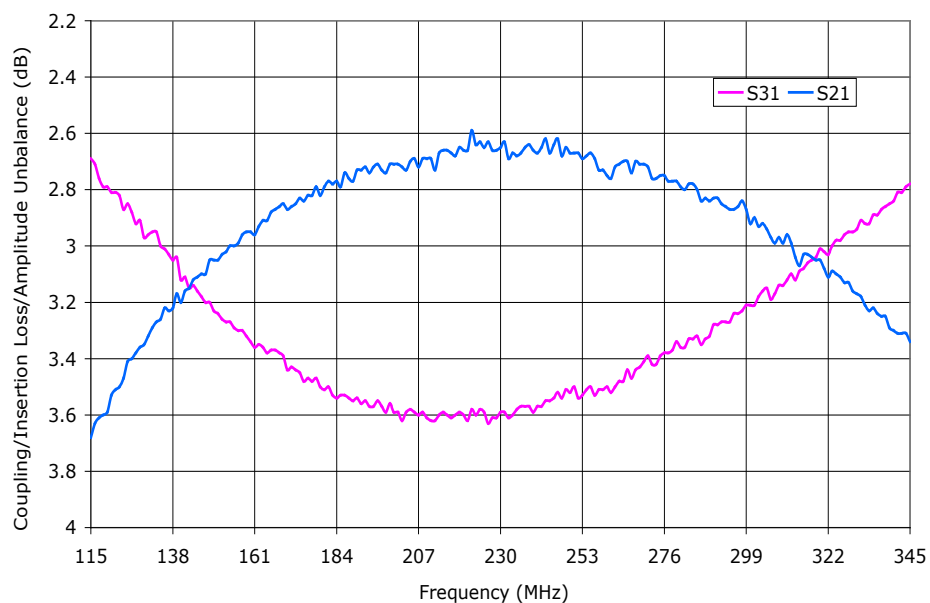

PERFORMANCE PLOTS



[查询"SLQ-310"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SLQ-310

3:1 BANDWIDTH

115 - 345 MHz

Data @ 25°C

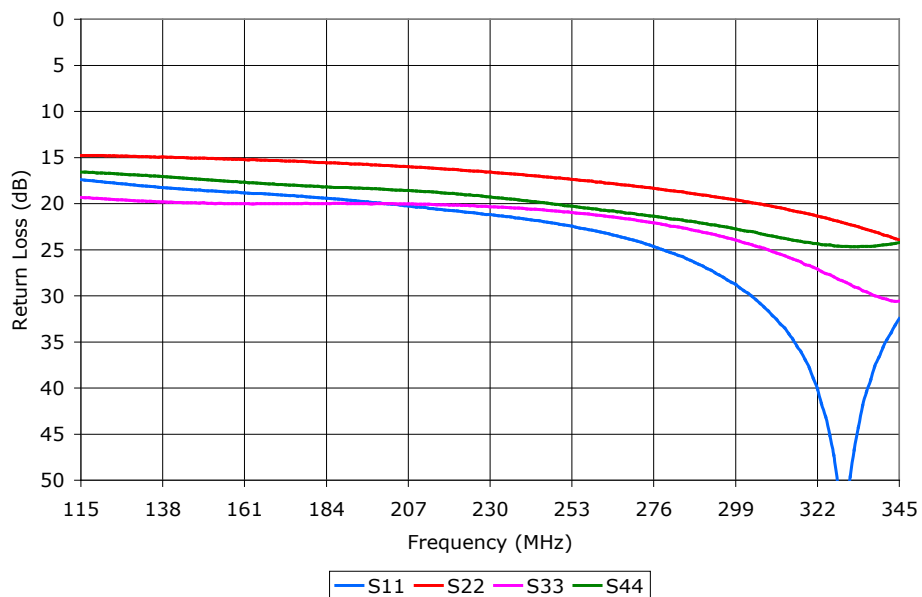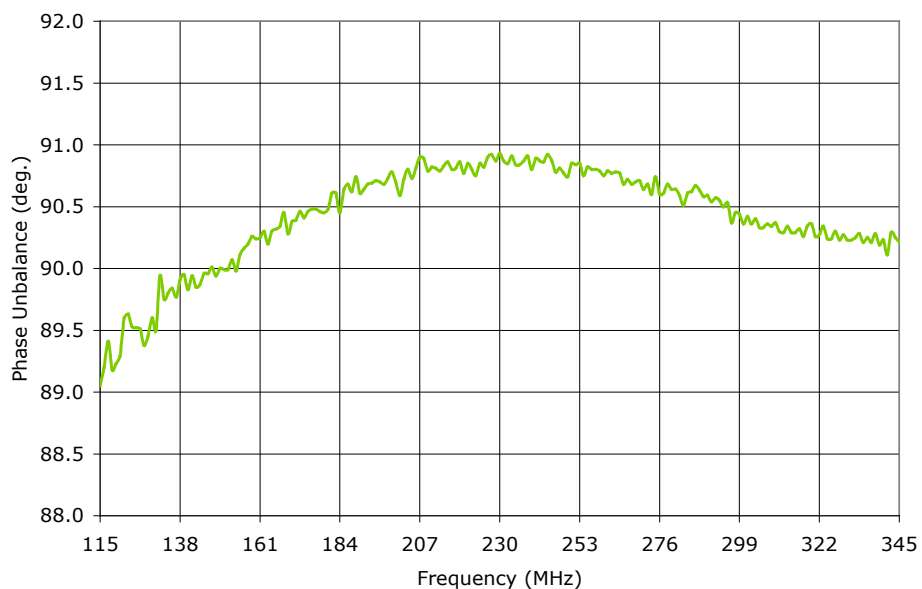

PERFORMANCE PLOTS


[查询"SLQ-310"供应商](#)

90° HYBRID SURFACE MOUNT MODEL: SLQ-310

3:1 BANDWIDTH

115 - 345 MHz

Data @ 25°C

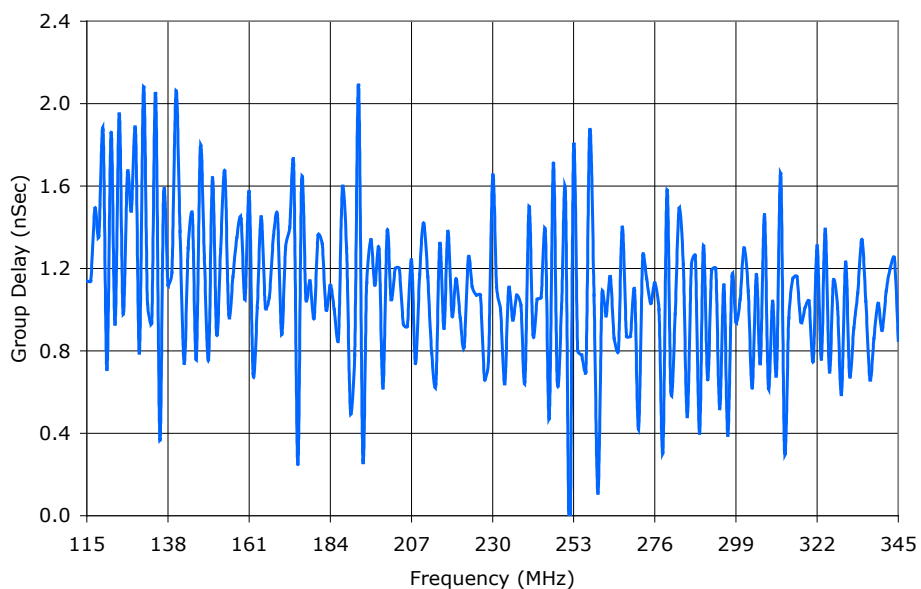

PERFORMANCE PLOTS