


DESCRIPTION

- 140 MHz SAW bandpass filter with 16 MHz bandwidth in 13.3x6.5mm SMP.
- RoHS compliant.



TYPICAL PERFORMANCE

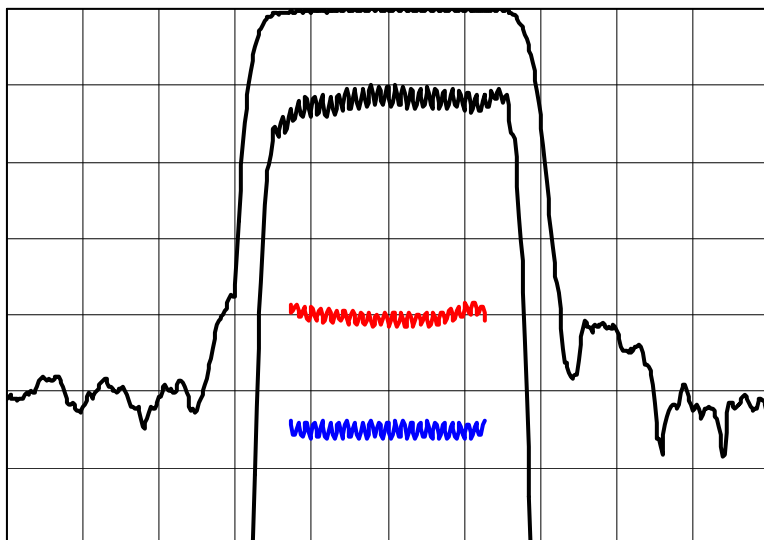

Horizontal :	Frequency	5	MHz / div
Vertical (from top)	Magnitude	10	dB/div
	Magnitude	1	dB/div
	Phase Deviation	10	deg/div
	Group Delay Deviation	200	ns/div



Wide Band Response
 Frequency Span : 0-500 MHz
 Vertical Scale : 10 dB/div

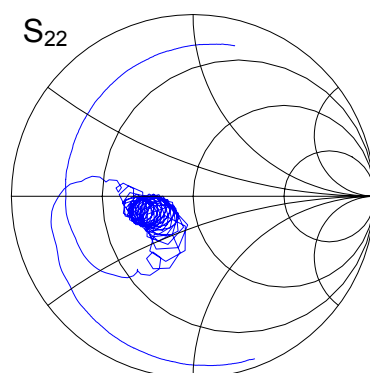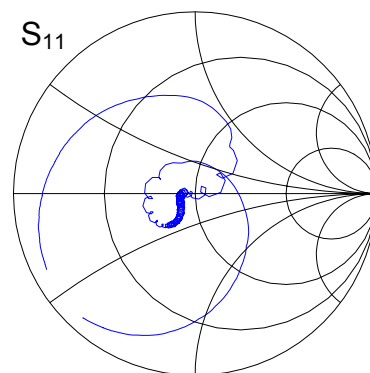

Input and Output Impedances
 Frequency Span : 100-180 MHz

SPECIFICATION


Parameter	Min	Typ	Max	Units
Center Frequency (Fc) ¹	139.6	140	140.4	MHz
Insertion Loss ²		8.2	11	dB
1 dB Bandwidth	15	16.4		MHz
3 dB Bandwidth	16	17.4		MHz
35 dB Bandwidth		21.1	22	MHz
Passband Ripple ³		0.43	1	dB p-p
Phase Deviation from Linear ³		3	14	deg p-p
Group Delay Variation ³		45	160	ns p-p
Absolute Delay		0.94		μs
Ultimate Rejection ⁴	40	44		dB
Substrate	Lithium Niobate			
Temperature Coefficient of Frequency		-90		ppm/°C
Ambient Temperature		25		°C
System Source and Load Impedance		50		Ω

- Notes:
1. Average of the lower and upper 3 dB frequencies.
 2. Average level in the passband.
 3. Evaluated over 80% of the 3dB bandwidth (i.e. $F_C \pm 6.4$ MHz).
 4. Evaluated over the intervals 20 – 124 MHz and 156 – 280 MHz.

MAXIMUM RATINGS

Parameter	Min	Max	Units
Storage Temperature Range	-40	+85	°C
Input Power Level		+17	dBm
DC Voltage Between Each Terminal		15	V

MATCHING CIRCUIT

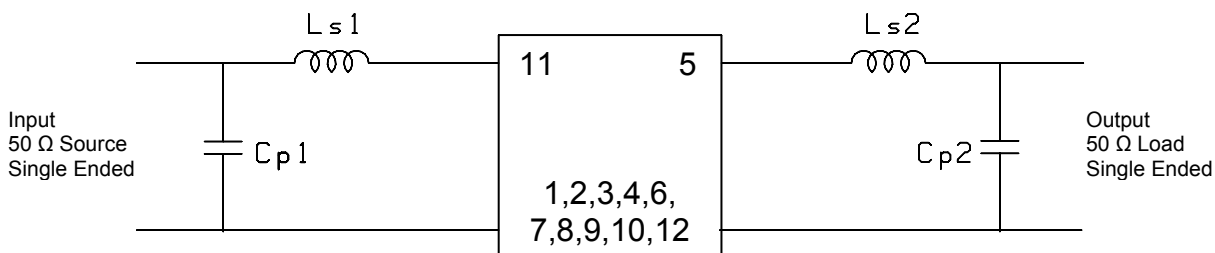

Component values (minimum inductor Q = 45):


$$Ls1 = 100 \text{ nH} \quad Cp1 = 33 \text{ pF} \quad Ls2 = 120 \text{ nH} \quad Cp2 = 0 \text{ pF (not used)}$$

Notes:

1. The component values shown above are those used in the Micro Networks test fixture. Optimum values may change depending on board layout. Cp2 may be a capacitor or an inductor.
2. 5% tolerance components or better are recommended.


PACKAGE OUTLINE AND RECOMMENDED PCB LAYOUT

PACKAGE INFORMATION

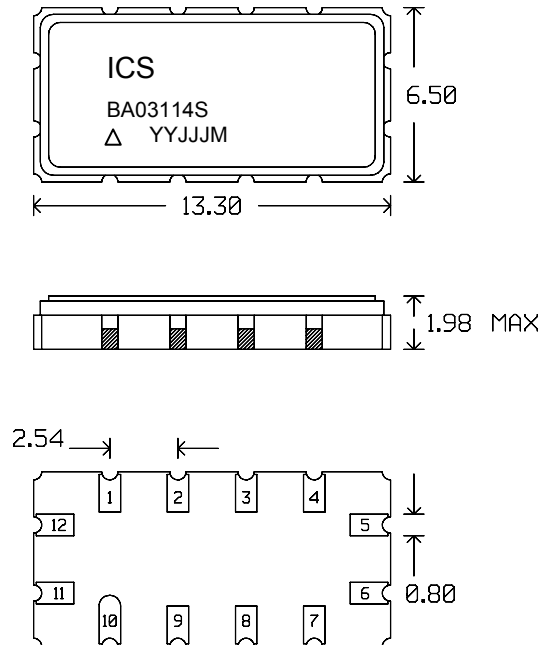

Package Material:
 Body: Al_2O_3 ceramic
 Lid: Kovar, Ni plated
 Terminations: Au plating 1 μ m min,
 over a 1.3-8.9 μ m Ni plating

RECOMMENDED PCB FOOTPRINT

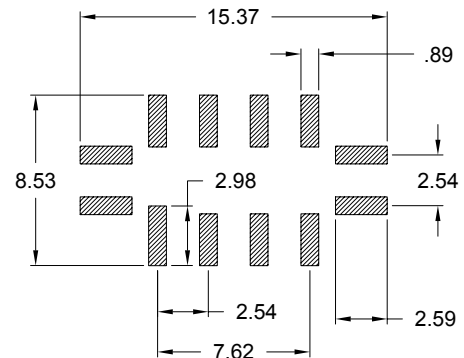

Pin Configuration:

11	Input
12	Input Return
5	Output
6	Output Return
All Others	Ground

NOTE:

Dimensions shown are all nominal in millimetres. All tolerances are ± 0.15 mm except overall length and width.

ISO 9001
 Registered

All specifications are believed to be accurate and reliable. However, MNC reserves the right to make changes without notice.
 © 2005 All rights reserved.