


SAW Bandpass Filter 201142C



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

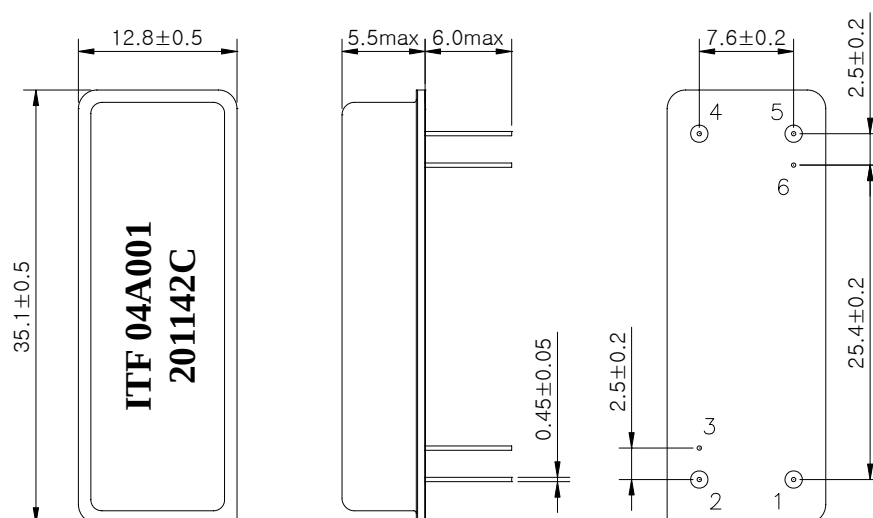

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201142C	
		Rev. Date	2004-03-22	
		Rev.	NM3034-CS03	1/5

SAW Bandpass Filter 201142C



3. Specifications

Fo = 70 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -15℃ ~ +75℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	70.0	-
Insertion Loss	dB	-	25.5	27.0
1dB Bandwidth	MHz	-	9.85	-
3dB Bandwidth	MHz	10.0	10.1	-
40dB Bandwidth	MHz	-	11.13	11.25
Amplitude Ripple (Fo +/- 4.375 MHz)	dB	-	0.9	1.2
Group Delay Variation (Fo +/- 4.375 MHz)	nsec	-	80	150
Absolute Delay	usec	-	3.18	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/℃	-	-90	-

Operating temperature range : + 25 ℃		Minimum	Typical	Maximum
Center Frequency	MHz	69.96	70.0	70.04
Amplitude Ripple (Fo +/- 4.7 MHz)	dB	-	1.0	1.2
Group Delay Variation (Fo +/- 4.7 MHz)	nsec	-	80	150

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201142C	
		Rev. Date	2004-03-22	
		Rev.	NM3034-CS03	2/5

SAW Bandpass Filter 201142C



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



5. Marking Configuration

ITF¹⁾ 04A001²⁾
201142C³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201142C	
		Rev. Date	2004-03-22	
		Rev.	NM3034-CS03	3/5

SAW Bandpass Filter 201142C



6. Typical Performance (at +25℃)



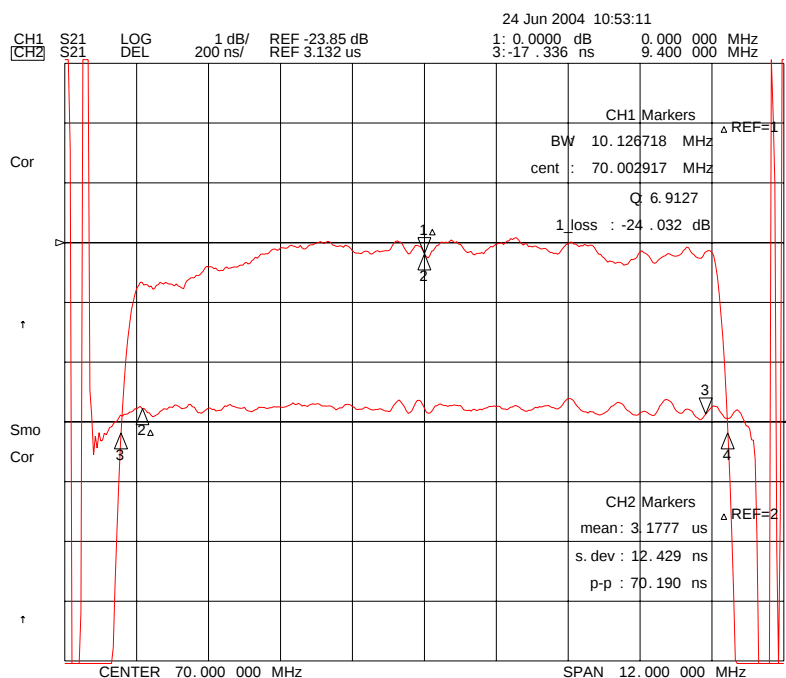
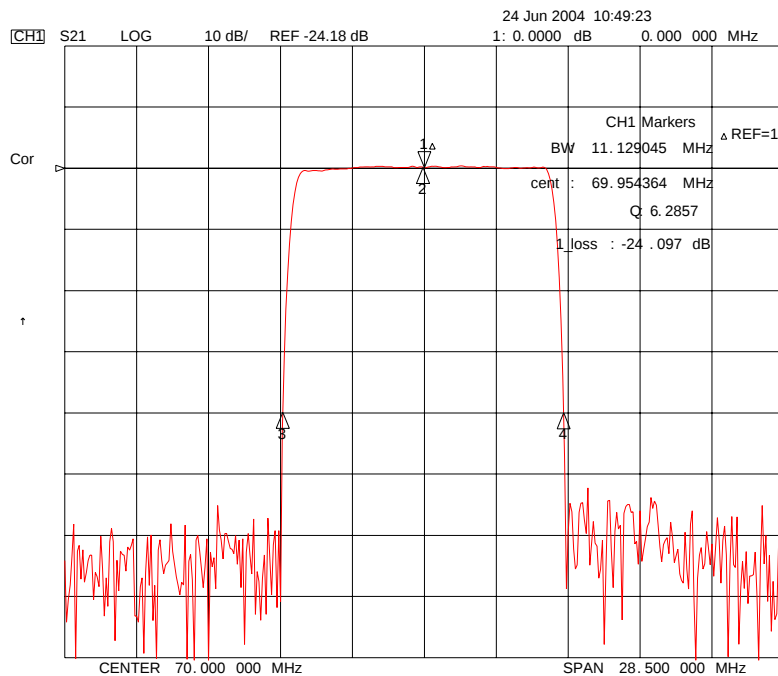


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No.		201142C	
			Rev. Date		2004-03-22	
			Rev.		NM3034-CS03	4/5

SAW Bandpass Filter 201142C



Typical Performance (at +25°C)

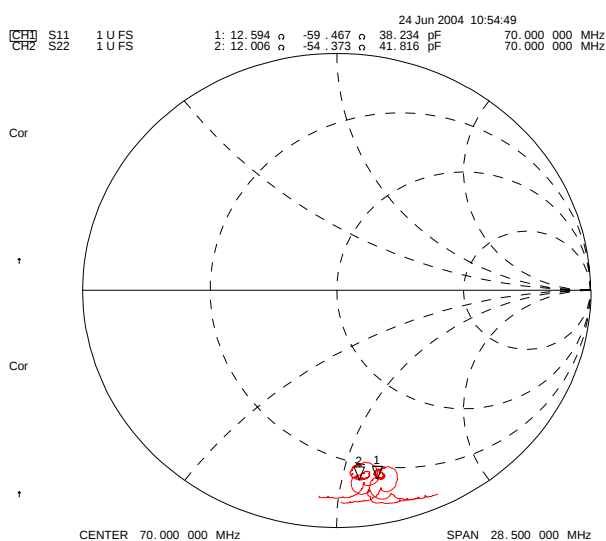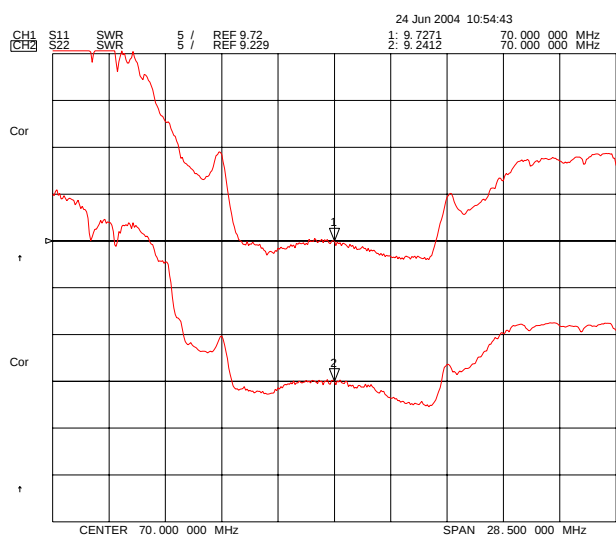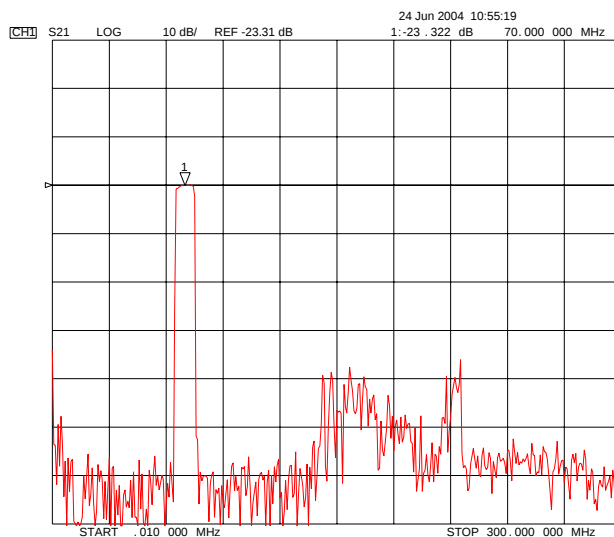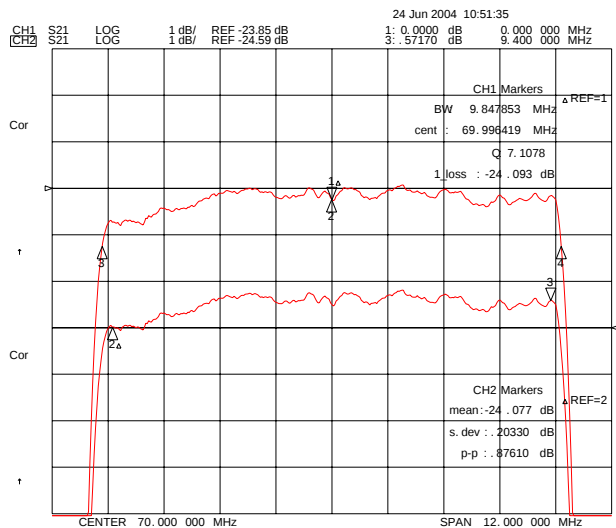

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

201142C

Rev. Date

2004-03-22

Rev.

NM3034-CS03

5/5