
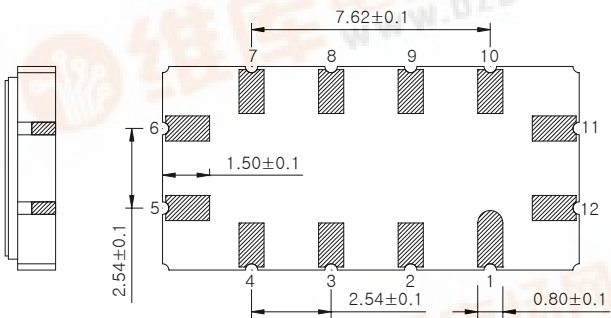


SAW Bandpass Filter 240551B

1. Features

- IF Bandpass Filter
- Low-Loss Filter
- Single-Ended Operation
- Ceramic Surface Mount Device (SMD) Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimensions

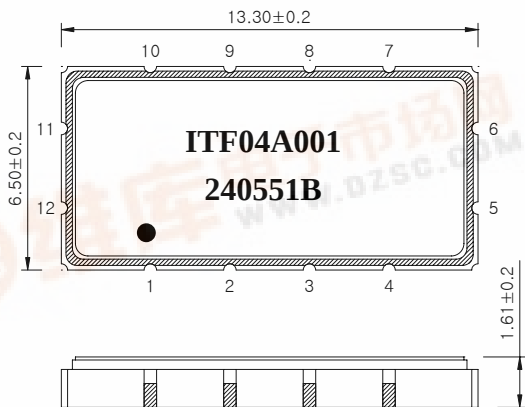

Package : S1365

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um Ni Plating

Pad Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No.	240551B	
			Date	2004-06-24	
			Rev.	NJ4010-CS01	1/5

SAW Bandpass Filter 240551B

3. Specification

Fo = 81.25 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating Temperature Range : -30℃ ~ +85℃		Minimum	Typical	Maximum
Center Frequency	MHz	80.65	81.25	81.85
Insertion Loss	dB	-	6.6	8.0
1dB Bandwidth	MHz	4.5	4.8	-
3dB Bandwidth	MHz	5.4	5.6	-
40dB Bandwidth	MHz	-	8.2	8.7
Amplitude Ripple (Fo +/- 2 MHz)	dB	-	0.7	1.0
Group Delay Variation (Fo +/- 2 MHz)	nsec	-	80	140
Absolute Delay	usec	-	1.1	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/℃	-	- 86	-

Room Temperature : +25℃		Minimum	Typical	Maximum
Center Frequency	MHz	81.05	81.25	81.85
Amplitude Ripple (Fo +/- 3.2 MHz)	dB	-	0.7	1.0
Group Delay Variation (Fo +/- 3.2 MHz)	nsec	-	80	150

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyunggi-Do, Korea 421-809	Part No.	240551B	
		Date	2004-06-24	
		Rev.	NJ4010-CS01	2/5

SAW Bandpass Filter 240551B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

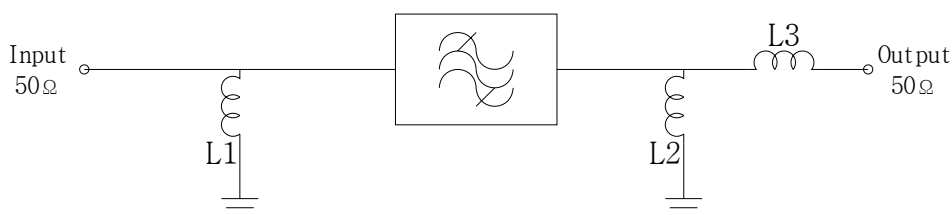

L1 = 100 nH,

L2 = 120 nH

L3 = 82 nH

5. Marking Configuration

ITF¹⁾ 04A001²⁾

240551B³⁾

●⁴⁾

1) Manufacturer name

2) Lot Number

3) Part Number



4) Pad Number 1 Index

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240551B	
		Date	2004-06-24	
		Rev.	NJ4010-CS01	3/5

SAW Bandpass Filter 240551B



6. Typical Performance (at +25℃)

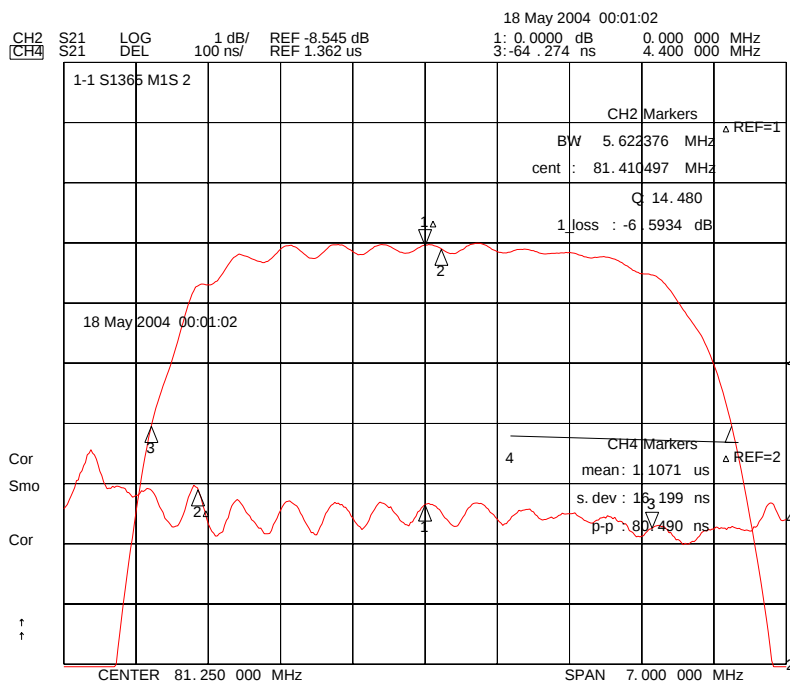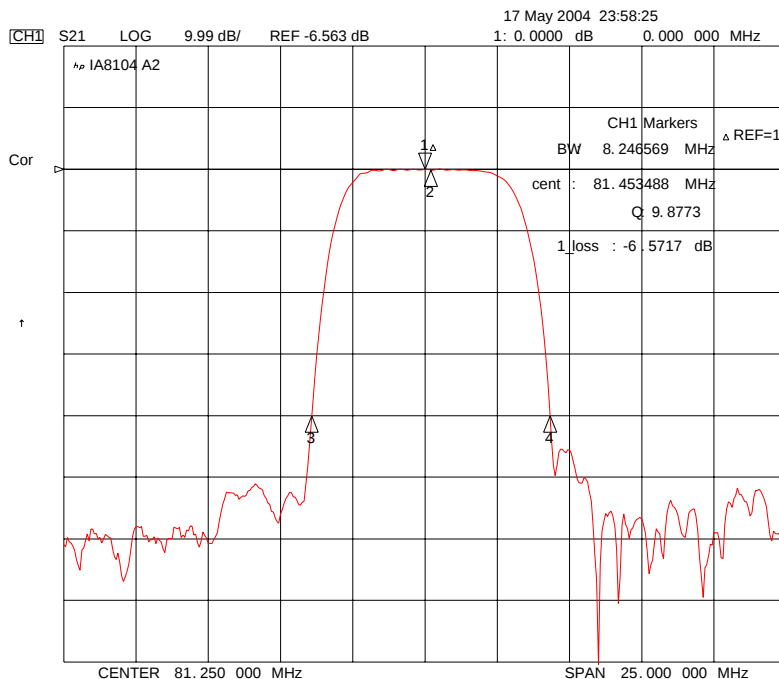

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyunggi-Do, Korea 421-809

Part No.

240551B

Date





2004-06-24

Rev.

NJ4010-CS01

4/5

SAW Bandpass Filter 240551B

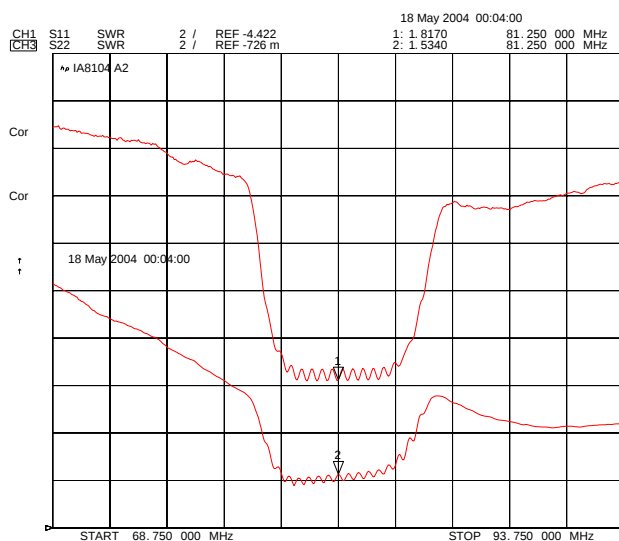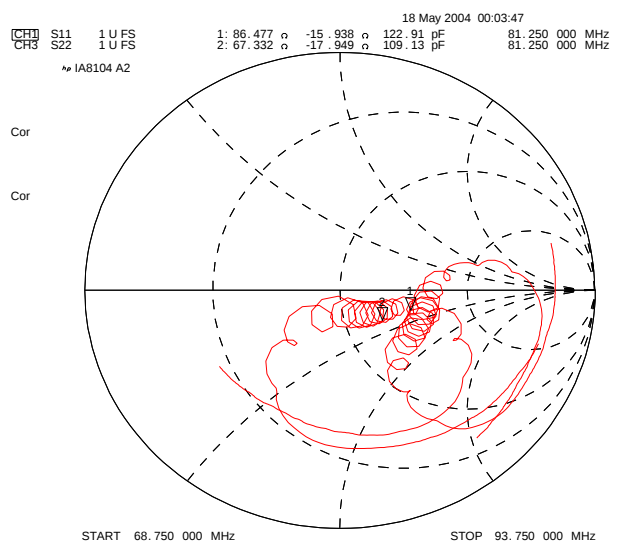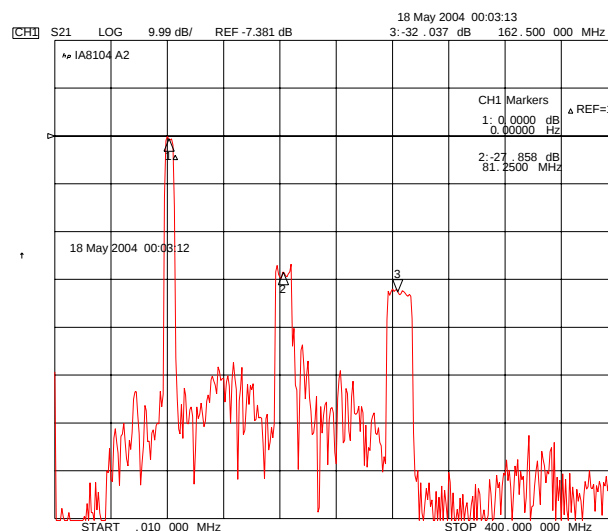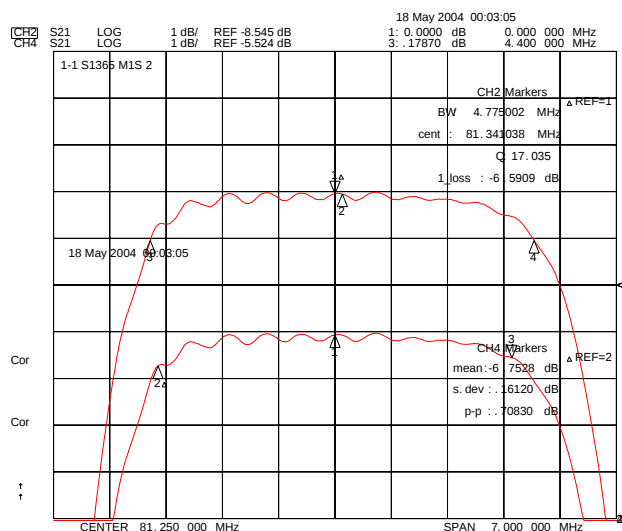

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

240551B

Date

2004-06-24

Rev.

NJ4010-CS01

5/5