



MMBTA44/45

NPN EPITAXIAL SILICON TRANSISTOR

HIGH VOLTAGE TRANSISTOR

■ FEATURES

*Collector-Emitter voltage: $V_{CE0}=400V$ (UTC **MMBTA44**)



$V_{CE0}=350V$ (UTC **MMBTA45**)

*Collector current up to 300mA

*Complement to UTC **MMBTA94/93**

*Power Dissipation: $P_D(\max)=350mW$

■ MARKING (MMBTA44)

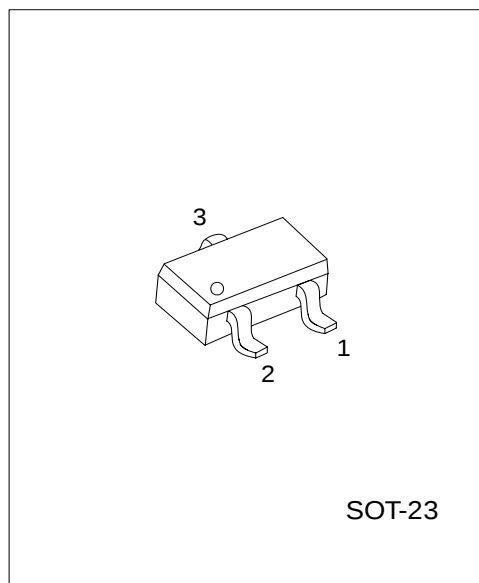

SOT-23

* Pb-free plating product number:

MMBTA44L/MMBTA45L

■ PIN CONFIGURATION

PIN NO.	PIN NAME
1	Emitter
2	Base
3	Collector

■ ORDERING INFORMATION

Order Number		Package	Packing
Normal	Lead free		
MMBTA44-AE3-R	MMBTA44L-AE3-R	SOT-23	Tape Reel
MMBTA45-AE3-R	MMBTA45L-AE3-R	SOT-23	Tape Reel

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage	MMBTA44	V_{CBO}	500	V
	MMBTA45		400	
Collector-Emitter Voltage	MMBTA44	V_{CEO}	400	V
	MMBTA45		350	
Emitter-Base Voltage		V_{EBO}	6	V
Collector Current		I_C	300	mA
Power Dissipation	$T_a=25^{\circ}\text{C}$	P_D	350	mW
	$T_c=25^{\circ}\text{C}$		1.5	W
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-40 ~ +150	$^{\circ}\text{C}$


■ ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	MMBTA44	BV_{CBO}	$I_C=100\mu\text{A}, I_B=0$	500			V
	MMBTA45			400			
Collector-Emitter Breakdown Voltage	MMBTA44	BV_{CEO}	$I_C=1\text{mA}, I_B=0$	400			V
	MMBTA45			350			
Emitter-Base Breakdown Voltage		BV_{EBO}	$I_E=100\mu\text{A}, I_C=0$	6			V
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=1\text{mA}, I_B=0.1\text{mA}$ $I_C=10\text{mA}, I_B=1\text{mA}$ $I_C=50\text{mA}, I_B=5\text{mA}$			0.4 0.5 0.75	V
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=10\text{mA}, I_B=1\text{mA}$			0.75	V
Collector Cut-off Current	MMBTA44	I_{CBO}	$V_{CB}=400\text{V}, I_E=0$			0.1	μA
	MMBTA45		$V_{CB}=320\text{V}, I_E=0$			0.1	
Collector Cut-off Current	MMBTA44	I_{CES}	$V_{CE}=400\text{V}, I_B=0$			0.5	μA
	MMBTA45		$V_{CE}=320\text{V}, I_B=0$			0.5	
Emitter Cut-off Current		I_{EBO}	$V_{EB}=4\text{V}, I_C=0$			0.1	μA
DC Current Gain(Note)		h_{FE}	$V_{CE}=10\text{V}, I_C=1\text{mA}$ $V_{CE}=10\text{V}, I_C=10\text{mA}$ $V_{CE}=10\text{V}, I_C=50\text{mA}$ $V_{CE}=10\text{V}, I_C=100\text{mA}$	40 50 45 40		240	
Current Gain Bandwidth Product		f_T	$V_{CE}=20\text{V}, I_C=10\text{mA}$ $f=100\text{MHz}$	50			MHz
Output Capacitance		C_{ob}	$V_{CB}=20\text{V}, I_E=0, f=1\text{MHz}$			7	pF


Note: Pulse test: $P_W<300\mu\text{s}$, Duty Cycle<2%

■ TYPICAL CHARACTERISTICS


DC current gain

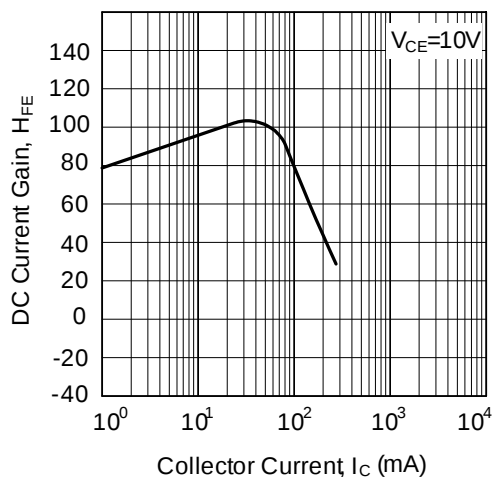


Turn-on switching times


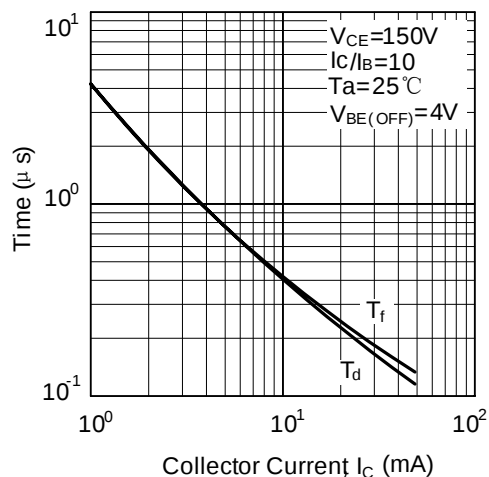


Turn - off switching times


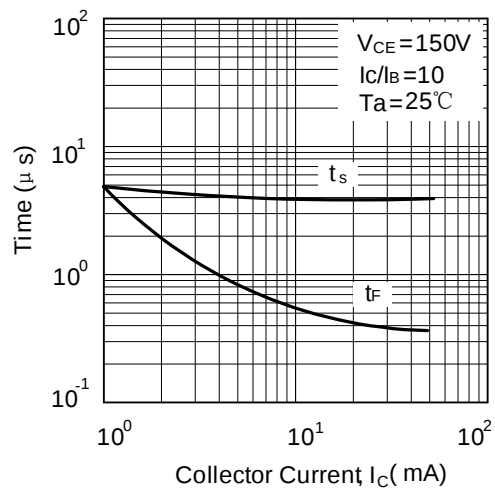


Capacitance

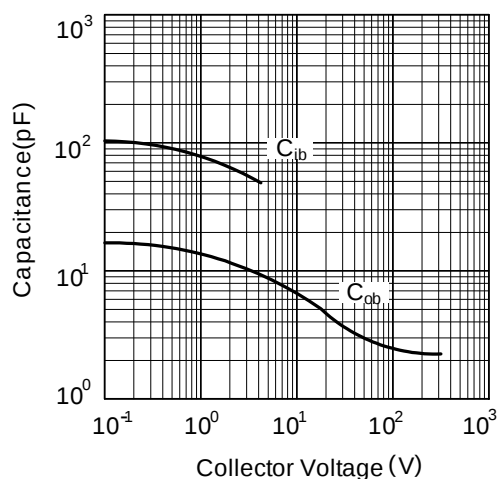

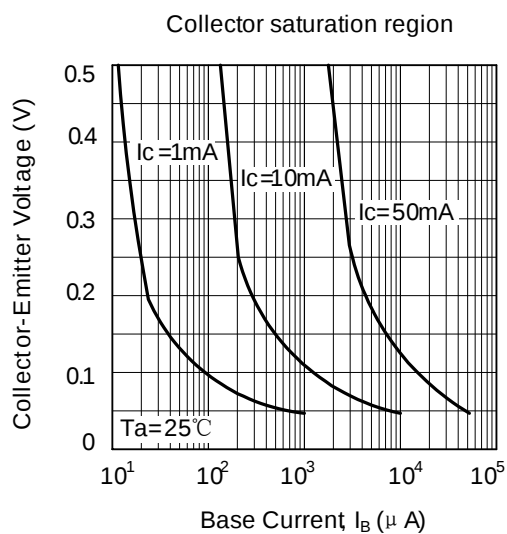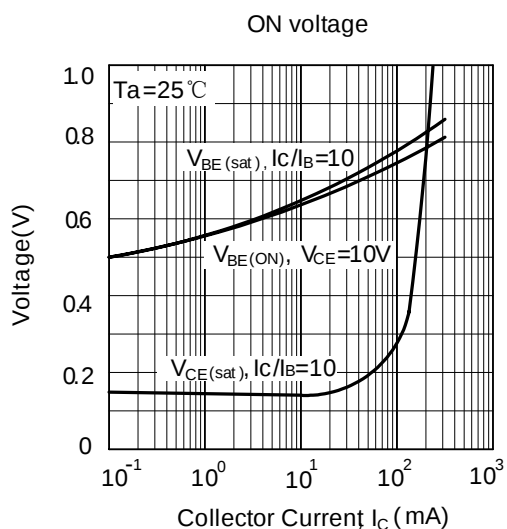

■ TYPICAL CHARACTERISTICS(cont.)

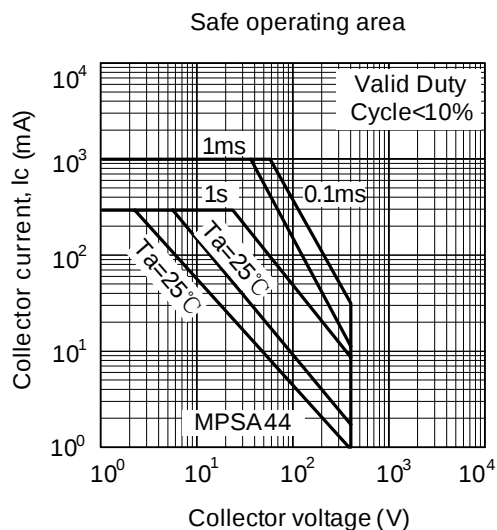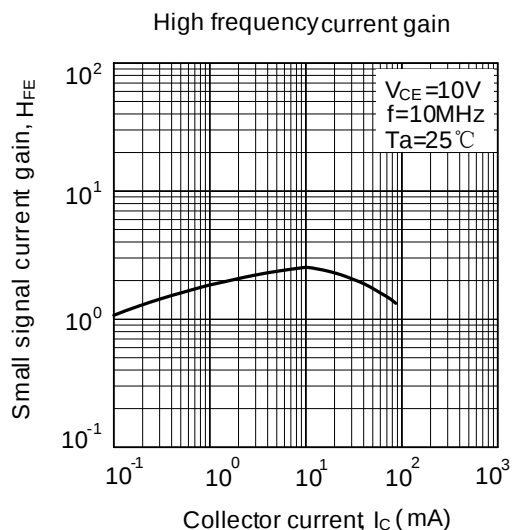

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.